

[2018 International Conference on Electrical Engineering and Computer Science \(ICECOS\)](#) took place October 2-4, 2018 in Pangkal Pinang, Indonesia.

ISBN: 978-1-5386-5720-1

Copyright and Reprint Permission: Abstracting is permitted with credit to the source. Libraries are permitted to photocopy beyond the limit of U.S. copyright law for private use of patrons those articles in this volume that carry a code at the bottom of the first page, provided the per-copy fee indicated in the code is paid through Copyright Clearance Center, 222 Rosewood Drive, Danvers, MA 01923. For other copying, reprint or republication permission, write to IEEE Copyrights Manager, IEEE Operations Center, 445 Hoes Lane, Piscataway, NJ 08854. All rights reserved. Copyright © 2018 by IEEE.

LEMBAR PENGESAHAN


1. Judul : Multisensors System for Real Time Detection of Length, Weight, and Heartbeat of Premature Baby in The Incubator
2. Penulis : Sri Purwiyanti, Sri Ratna Sulistiyanti, F.X. Arinto Setyawan, Billy Mulia Wibisono, Ketut sasmita Atmaja, Helmy Fitriawan
3. Publikasi : Proceeding of International Conference on Electrical Engineering and Computer Science (ICECOS 2018)
4. Vol./No./Hal. : - / - / 85-88
5. Bentuk Publikasi : Seminar Internasional terindeks IEEE dan Scopus
6. ISBN : 978-1-5386-5719-5
7. Penerbit : Institute of Electrical and Electronics Engineers (IEEE)
8. Tahun Penerbitan : Oktober 2018
9. Website : <https://ieeexplore.ieee.org/document/8605208>

Bandar Lampung, 6 Mei 2020
Penulis,


Megetahui,
Dekan Fakultas Teknik Unila




Prof. Ir. Suharno, M.Sc., Ph.D., IPU.
NIP. 196207171987031002

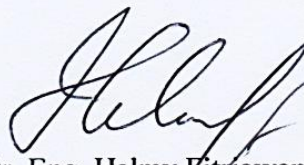
Dr. Eng. Helmy Fitriawan, S.T., M.Sc.
NIP. 197509282001121002

Menyetujui,
Ketua LPPM Universitas Lampung

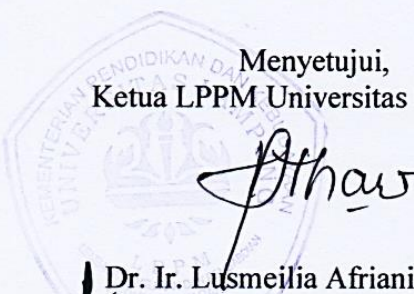
Dr. Ir. Lusmeilia Afriani, D.E.A.
NIP. 196505101993032008

TGL	18.06.2020
NO. INVEN	269/P/B/1/FT/2020
JENIS	Prosiding
PARAF	

**INTERNATIONAL CONFERENCE ON ELECTRICAL ENGINEERING
AND COMPUTER SCIENCE (ICECOS) 2018**

Organizing Committee

International Advisory Committee

Gopakumar, Indian University of Science Bangalore, (Power Electronics) IEEE fellow
Haitham Abu-Rub texas A&M University, Qatar
Z. Y. Dong, University of Sidney
Akhtar Kalam, Victoria University, Melbourne, Australia
Azha binti Mohamed, Universiti Kebangsaan Malaysia
Nasrudin bin Abd Rahim, Universiti Malaya

Steering Committee

Yanuarsyah Haroen, Institut Teknologi Bandung
Zainal Salam (UTM) Malaysia
Zainuddin Nawawi, Universitas Sriwijaya
Suwarno, Institut Teknologi Bandung
Hussein Ahmad, (UTHM) Malaysia
Anton Satria Prabuwono, King Abdulaziz University

General Chair

Siti Nurmaini, Universitas Sriwijaya, Indonesia

General co-Chairs

Hiroyuki Iida, Japan Advanced Institute of Science and Technology
Muhammad Abu Bakar, Universitas Sriwijaya, Indonesia
Rahmat Budiarto, Al-baha University, Saudi Arabia
Zolkafle Buntat, Universiti Teknologi Malaysia, Malaysia

Publication Chairs

Deris Stiawan, Universitas Sriwijaya, Indonesia
Firdaus, Universitas Sriwijaya, Indonesia
Tole Sutikno, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

Finance Chairs & Treasurer

Rizda Fitri Kurnia, Universitas Sriwijaya, Indonesia
Caroline, Universitas Sriwijaya, Indonesia

Public Relation Chairs

Muhammad Irfan Jambak, Universitas Sriwijaya, Indonesia
Mochammad Facta, Universitas Diponegoro, Semarang, Indonesia
Teguh Bharata Aji, Universitas Gadjah Mada, Indonesia
Zulfatman, Universitas Muhammadiyah Malang, Malang, Indonesia
Noor Akhmad Setiawan, Universitas Gadjah Mada, Indonesia
Muhammad Syafrullah, Universitas Budi Luhur, Jakarta, Indonesia
Anton Yudhana, Universitas Ahmad Dahlan, Yogyakarta, Indonesia

Endra Pitowarno, Politeknik Elektronika Negeri Surabaya – PENS, Indonesia
Rudi Kurianto, Universitas Tanjungpura, Indonesia

Technical Program Chairs

Reza Firsandaya Malik, Universitas Sriwijaya, Indonesia
Mohd. Riduan Ahmad, Universiti Teknikal Malaysia Melaka, Malaysia
Munawar A. Riyadi, Universitas Diponegoro, Semarang, Indonesia
Herlina Wahab Universitas Sriwijaya, Indonesia
Imam Much Ibnu Subroto, Universitas Islam Sultan Agung, Semarang, Indonesia

International Scientific Committee

Brian Kurkoski, School of Information Science Japan Advanced Institute of Science and
Technology (JAIST), Japan
Dejan Gjorgjevikj, SS Cyril and Methodius University, Skopje, Macedonia
Ion Tutanescu, University of Pitesti, Romania
Ahmad Hoirul Basori, King Abdulaziz University, Saudi Arabia
Germano Lambert-Torres, Universidade Federal de Itajuba, Brazil
Serhat Şeker, Istanbul Technical University, Turkey
Ildar Z Batyrshin, Mexican Petroleum Institute, Mexico
Wazir Mustafa, Universiti Teknologi Malaysia
Mohammed Yahia Alzahrani, Al-baha University, Saudi Arabia
Ahmed Alahmadi, Al-baha University, Saudi Arabia
Gorakanage Arosha Chandima Gomes (UPM) Malaysia
Montserrat Ros (Wolongong University) Australia
Malik Elbuluk (The University Of Akron) USA
Rudi Heriansyah (Umm Al-Qura University) Saudi Arabia
Vernon Coray (Uppsala University) Sweden
Mike Inggs, South Africa
Ilhan Kocaarslan (Istanbul University)
Gamal Abdel Fadeel Khalaf, Faculty of Engineering, Helwan University, Cairo, Egypt
Dana Prochazkova. PhD., DrSc, Czech Technical University, Czech Republic
Serdar Ethem Hamamci, Inonu University, Turkey
Gökhan Gökmen, Marmara University, Turkey
Mohd. Yazid Idris, Universiti Teknologi Malaysia
Audrius Senulis, Klaipeda University, Lithuania
Peng Peng, Sr. Development Engineer at Seagate Technology, United States
Kamal Bechkoum, School of Science and Technology, Northampton, United Kingdom
Simon Xu, Algoma University College, Canada
Aydin Nusret Güçlü, METU, Ankara, Turkey
Sultan Noman Qasem, Al- Imam Muhammad Ibn Saud Islamic University, Saudi Arabia
Tahir M. Lazimov, Azerbaijan Technical University, Azerbaijan
Tahir Cetin Akinci, Kirklareli University, Turkey
Siti Zaiton Mohd Hashim, Universiti Teknologi Malaysia, Malaysia

Local Chairs

Bhakti Yudho Suprpto, Universitas Sriwijaya, Indonesia
Djulil Amri, Universitas Sriwijaya, Indonesia
Irmawan, Universitas Sriwijaya, Indonesia
Abdul Haris Dalimunthe, Universitas Sriwijaya, Indonesia
Dessy Windiasari, Universitas Sriwijaya, Indonesia
Hera Hikmarika, Universitas Sriwijaya, Indonesia
Hermawati, Universitas Sriwijaya, Indonesia
Rahmawati, Universitas Sriwijaya, Indonesia
Suci Dwi Jayanti, Universitas Sriwijaya, Indonesia
Saparudin, Universitas Sriwijaya, Indonesia
Ermatita, Universitas Sriwijaya, Indonesia
Hadi Purnawan Satria, Universitas Sriwijaya, Indonesia
Ade Silvia, Polytechnic State of Sriwijaya, Indonesia
Nyanyu Latifah Husni, Polytechnic State of Sriwijaya, Indonesia
Syarifah Fitria, Universitas Sriwijaya, Indonesia
Dina Yunika, Universitas Sriwijaya, Indonesia
Sarifah Putri Raflesia, Universitas Sriwijaya, Indonesia
Samsuryadi, Universitas Sriwijaya, Indonesia
Rosi Pasarella, Universitas Sriwijaya, Indonesia
Sutarno, Universitas Sriwijaya, Indonesia
Sukemi, Universitas Sriwijaya, Indonesia
Ahmad Heryanto, Universitas Sriwijaya, Indonesia
Alfarisi, Universitas Sriwijaya, Indonesia
Pacu Putra, Universitas Sriwijaya, Indonesia

2018 International Conference on Electrical Engineering and Computer Science (ICECOS)

Table of Content

RFI Suppression Based on Time-Frequency Spectrogram for FMCW Radar	1
<i>Oktanto Dedi Winarko (Labs247); Andrian Andaya Lestari (Labs247, Indonesia)</i>	1
Performance Consideration in Signal Acquisition for High Dynamic Application in Tropical Environment	7
<i>Syed Mohd Fairuz Syed Mohd Dardin and Akram Abdul Azid (Universiti Pertahanan Nasional Malaysia, Malaysia); Zuhairi Abdul Rashid (Universiti Pertahanan Nasional Malaysia ; Engineering Faculty, Malaysia); Asnor Mazuan Ishak and Ahmad Shukri Abu Hasim (Universiti Pertahanan Nasional Malaysia, Malaysia)</i>	7
Benchmarking Low Latency Kernel and Xenomai for a Network Gateway Encryption Application	13
<i>Mastura Diana Marieska (Sriwijaya University, Indonesia); Achmad Imam Kistijantoro (Bandung Institute of Technology, Indonesia)</i>	13
Dual Circular-Polarized Slot Antenna Design for Wireless MIMO System at 2.4 GHz	19
<i>Nornikman Hassan and Badrul Hisham Ahmad (Universiti Teknikal Malaysia Melaka, Malaysia); Mohamad Zoinol Abidin Bin Abd Aziz (Universiti Teknikal Malaysia Melaka ; Hang Tuah Jaya, Malaysia); Mohd Riduan Ahmad, Zahriladha Zakaria and Chew Siang (Universiti Teknikal Malaysia Melaka, Malaysia); Mona Riza Mohd Esa (Universiti Teknologi Malaysia, Malaysia)</i>	19
Application of WSNs for Detection Land and Forest Fire in Riau Province Indonesia	25
<i>Evizal Abdul Kadir, Sri Listia Rosa and Ana Yulianti (Universitas Islam Riau, Indonesia)</i>	25
Optimization of Coffee Bean Drying Using Hybrid Solar Systems and Wi-Fi Data Communication	29
<i>Devita Ayu Larasati and Ike Fibiriani (University of Jember, Indonesia); Dedy Wahyu Herdiyanto and Guido Kalandro (Universitas Jember, Indonesia); Widnyono Hadi and Catur Suko Sarwono (University of Jember, Indonesia)</i>	29
Fabrication of Integrated Power Divider and Filter for X Band Radar Applications	33
<i>Folin Oktafiani (Indonesian Institute of Sciences (LIPI), Indonesia); Yuyu Wahyu (Indonesia Institute of Science LIPI, Indonesia); Yussi Saputera (Indonesian Institute of Sciences, Indonesia)</i>	33
Object Position Estimation Using Naive Bayes Classifier Algorithm	39
<i>Reza Firsandaya Malik (University of Sriwijaya ; Faculty of Computer Science, Indonesia); Eko Pratama, Huda Ubaya and Rido Zulfahmi (Universitas Sriwijaya, Indonesia); Deris Stiawan (University of Sriwijaya, Indonesia); Kemahyanto Exaudi (Universitas Sriwijaya, Indonesia)</i>	39
Optimal Route Driving for Leader-Follower Using Dynamic Particle Swarm Optimization	45
<i>Bambang Tutuko (Sriwijaya University, Indonesia); Siti Nurmaini (University of Sriwijaya, Indonesia); Putri Sahayu (Intelligent System Research Group, Universitas Sriwijaya, Indonesia)</i>	45

Electronic Transaction Device Based on Contact Smart Card Using Programmable System-on-Chip	51
<i>Trio Adiono (Institut Teknologi Bandung, Indonesia); Reynhart Malingkas and Adi Candra Swastika (Bandung Institute of Technology, Indonesia); Syifaul Fuada (Institut Teknologi Bandung, Indonesia)</i>	
	51
Visual Servoing Design and Control for Agriculture Robot; a Review	57
<i>Tresna Dewi (Politeknik Negeri Sriwijaya, Indonesia); Pola Risma (Sriwijaya Polytechnic, Indonesia); Yurni Oktarina (Polytechnic Sriwijaya Palembang-Indonesia, Indonesia); Selamat Muslimin (State Polytechnic of Sriwijaya, Indonesia)</i>	
	57
Design and Implementation of Analog Transceiver Circuit for Patient Monitoring System Based on OWC	63
<i>Trio Adiono and Radhian Fereh Armansyah (Institut Teknologi Bandung, Indonesia); Amy Hamidah Salman (Institut Teknologi Bandung, Korea); Syifaul Fuada (Institut Teknologi Bandung, Indonesia)</i>	
	63
Multistage Scanning Method on 64-Channels ECVT Sensor	69
<i>Arbai Yusuf (Universitas Indonesia ; C-Tech Labs Edwar Technology, Indonesia); Agus Santoso Tamsir, Dodi Sudiana and Harry Sudibyo (Universitas Indonesia, Indonesia)</i>	
	69
Enhancement of the Fuzzy Control Response with Particle Swarm Optimization in Mobile Robot System	73
<i>Siti Nurmaini (University of Sriwijaya, Indonesia); Febrina Setianingsih (Universitas Sriwijaya, Indonesia)</i>	
	73
A Comparison of Back Propagation Neural Network and Elman Recurrent Neural Network Algorithms on Altitude Control of Heavy-lift Hexacopter Based on Direct Inverse Control	79
<i>Bhakti Yudho Suprpto (University of Sriwijaya, Indonesia); Benyamin Kusumoputro (Universitas Indonesia, Indonesia)</i>	
	79
Multisensors System for Real Time Detection of Length, Weight, and Heartbeat of Premature Baby in the Incubator	85
<i>Sri Purwiyanti (Unila, Indonesia); Sri Ratna Sulistiyanti and Arinto Setyawan (University of Lampung, Indonesia); Helmy Fitriawan, Billy Wibisono and Ketut Atmaja (Lampung University, Indonesia)</i>	
	85
Using Pressure Sensors Towards Pipeline Leakage Detection	89
<i>Kemahyanto Exaudi, Rossi Passarella, Rendyansyah Rendyansyah and Rido Zulfahmi (Universitas Sriwijaya, Indonesia)</i>	
	89
Different Types of Fuzzy Logic in Obstacles Avoidance of Mobile Robot	93
<i>Ade Handayani, ASH (Politeknik Negeri Sriwijaya ; Engineering Electrical, Indonesia); Andry Meylani (Politeknik Negeri Sriwijaya, Indonesia); Ciksadan Dansadan (State of Polytechnic Sriwijaya, Indonesia); Nyayu Latifah Husni (Politeknik Negeri Sriwijaya, Indonesia); Siti Nurmaini (University of Sriwijaya, Indonesia); Irsyadi Yani (Universitas Sriwijaya, Indonesia); Carlos Sitompul (Politeknik Negeri Sriwijaya, Indonesia)</i>	
	93
Development of Computational Intelligence-based Control System Using Backpropagation Neural Network for Wheeled Robot	101

Multisensors System for Real Time Detection of Length, Weight, and Heartbeat of Premature Baby in The Incubator

Sri Purwiyanti
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
sri.purwiyanti@eng.unila.ac.id

Sri Ratna Sulistiyanti
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
sr_sulistiyanti@eng.unila.ac.id

FX. Arinto Setyawan
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
fx.arinto@eng.unila.ac.id

Billy Mulia Wibisono
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
billymulia_wibisono@yahoo.com

Ketut sasmita Atmaja
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
ketutsasmita@gmail.com

Helmy Fitriawan
Electrical Engineering
Lampung University
Bandar Lampung, Indonesia
helmy.fitriawan@eng.unila.ac.id

Abstract— Premature babies inserted into the incubator will always be monitored progressively, especially the heart rate, body length, and body weight. The aims of this research are to design and to create an incubator that can detect the abnormalities of baby's heartbeat through the baby's fingers in continuous and real time by using pulse sensor. The incubator also able to measured baby's length and weight automatically by using ultrasonic sensor and load-cell sensor, respectively. The output of all sensors will be processed and calibrated by Arduino Microcontroller, then the results will be displayed on the liquid crystal display (LCD). The systems also able to allow some notifications if any abnormalities have been occur. As a result, the heartbeat detector has a precision of $\pm 95\%$ when compared to a reference heartbeat detector. The system also can measure the length and weight of the infant with the measurement results are closer to the reference instrument, which the average error is not more than 5%. The results are most likely is a good preliminary results in order to build a smart incubator.

Keywords—pulse sensor, ultrasonic sensor, load-cell sensor.

I. INTRODUCTION

Premature baby mortality is still the largest contributor to baby mortality rate in Indonesia. In 2010, Indonesia was in fifth rank of the most preterm birth rate in the world, with preterm birth rates reach 675,700 cases per year from about 4.5 million births per year [1].

Premature baby's care can be categorized as very complicated and complex because of the risk that can be occur. Organs of premature babies are generally unable to work perfectly yet so that it makes it difficult to adjust to life outside the womb. Therefore, babies are usually placed in incubators to overcome problems such as temperature differences [2]. In additionally, the incubator also serves as a protective baby from the danger of infection.

Several researches have been done to build a better incubator. Budiono [3] published incubator design that could distribute heat evenly. It is also done by Nurcahya [4], but coupled with the regulation of moisture using microcontroller. Incubators with remote monitoring systems have been made but only for temperature and humidity

control [5].

Premature babies inserted into the incubator will always be monitored progressively, especially the heart rate, body length, and body weight [6]. Measurement of these parameters is usually done outside the incubator, then this will make the baby must be in and out of the incubator. To solve the problem, the availability of an incubator that has been equipped with a baby's heartbeat detector, body length detector, and body weight detector is very important. The measurement should be done real time and continuously.

Therefore, in this research, by using other studies related to infant and infant weight measurement tool [7-9], we try to build an incubator that more complete that other. The aims of this research are to design and to create an incubator that can detect the abnormalities of baby's heartbeat through the baby's fingers in a real time. The incubator also able to measured baby's length and weight automatically. The systems also able to allow some notifications if any abnormalities have been occur. This research is a preliminary research to build a smart incubator.

II. METHOD

In this research three types of sensors are needed, which is for measuring heart rate, body length, and body weight. Block diagram of the system is shown in Fig.1.

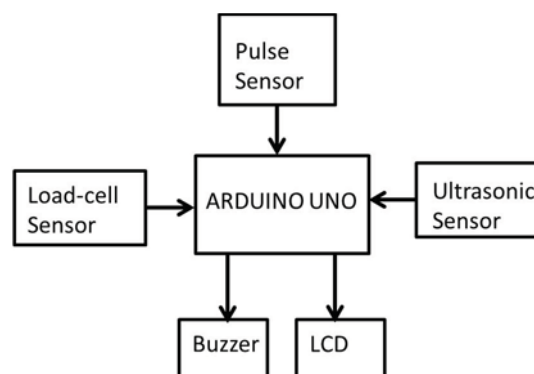


Fig. 1. Block diagram of multisensor system

For the measurements of the heart rate it used pulse sensor, then ultrasonic sensor for body length measurement, and load-cell sensor for body weight measurement. Pulse sensor has been used because it can measure heartbeat in the fingertip successfully based on some research [10-13].

Pulse sensor is a heart rate measurement sensor that can be connected to a microcontroller. Pulse sensor has a characteristic that has a heart shape and there is a green LED light in the middle. This sensor is very sensitive to vibration from the heartbeat. This sensor can be placed in all parts of the human body such as fingertips, chest or ears. The physical shape of the pulse sensor is shown in Fig. 2. On the front there is a small, optically plated hole, where the green LED will be visible. This light is generated by the ambient light sensor. When the LED rays are blocked by the fingertips, ears or other capillary networks then the sensors will read the amount of light that will be reflected back to the sensor.



Fig.2 Pulse Sensor

[Source: <http://www.theorycircuit.com/wp-content/uploads/2016/08/pulse-sensor-image>]

Ping sensor is an ultrasonic sensor that can detect the distance of the object by emitting ultrasonic waves with a frequency of 40 KHz. This ultrasonic wave propagates through the air at a speed of 344 meters per second, and then the sensor will detect its reflection. The output of this sensor is the pulse, where the pulse width will represent the measured distance. The width of the high pulse will correspond to the ultrasonic wave length traveled between the measuring distances to the object [14].

Load Cell is a force sensor that is often used to measure weight. It contain of strain gauge, a component made of foil grid which is a long thin wire and arranged in zigzag. When the strain gauge gets loaded, it will cause a change in the length of the thin wire, causing an increase in the resulting resistance. The change in resistance will be equivalent to the measured load. The length of the strain gauge is about 0.20 Mm up to 102 Mm. The standard strain gauge values are 120 Ohm and 350 Ohm. Strain gauges are commonly used in the measurement of the force, weight, pressure, load, and displacement of objects [15].

The output of all sensors will be processed and calibrated by Arduino Microcontroller, then the results will be displayed on the liquid crystal display (LCD) . The Arduino be equipped with normal data of heart rate, therefore if abnormality detected then it will activate the buzzer.

Research steps with the outcomes for each stage are described in Fig. 3.

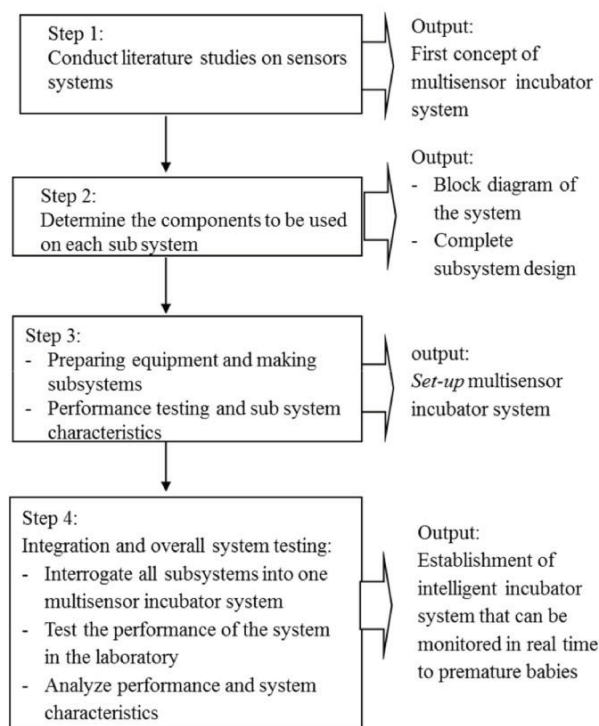


Fig. 3. Research Steps

Research steps are importance to ensure that the research is doing well. After literature studies, design process, and build the instrument system, next steps are doing some experiment to test the systems. We did several experiments to obtain instrument performance. Some of them will be explain in the next section.

III. RESULTS AND DISCUSSIONS

In this section it will discuss the results of tests that have been obtained and examined about the measurement of heart rate by pulse sensor, body length with ultrasonic sensors and weight with load-cell sensors. The purpose of this test is to know the level of precision and resistance of the system. However, in this research, it was unable to conduct a premature baby's heartbeat because the system is still in the preliminary studies so may be not secure yet for premature babies which is very sensitive to external interactions of physical as well as non-physical. In order to obtain the validation of data, every measurement has been repeated ten times in the same condition, however not all data is shown in this manuscript.

A. Pulse Sensor Test

The test on the pulse sensor is divided into two parts. First, in order to know output response of the pulse sensor (in the form of Bit Per Minute = BPM) when there are any beat and no beat detected, or the sensor does not touch the human skin. Second, in order to know output response of the pulse sensor in reading the heart beat humans with different ages. For all measurements, we used reference

sensors, i.e. Xiaomi Mi Band 2, which has been equipped with heart rate measurement for checking the precision of the pulse sensor. Results of the first experiment have been shown in Fig. 4.

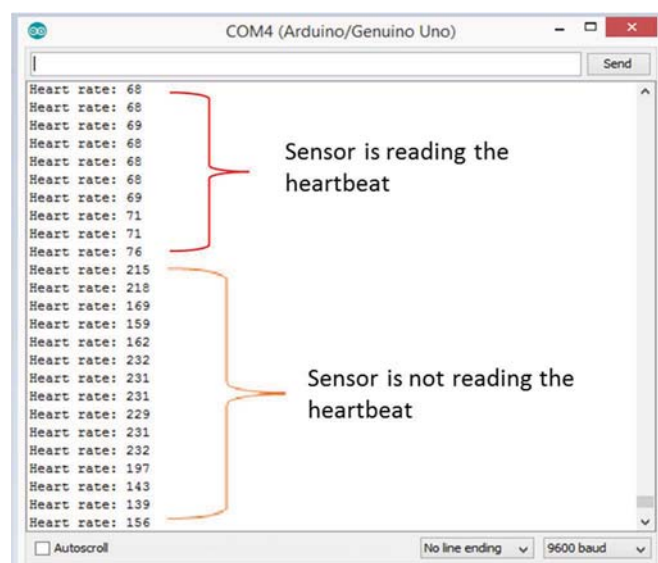


Fig.4 Pulse sensor's responses

Fig. 4 shows the sensor's responses when there is any beat and also no beat can be detected. Under no beat condition means the sensor doesn't touch human skin. The results show that the heart rate detected under no beat condition is faster comparing with under beat. It is reasonable because pulse sensor working by counting transmitted light that be reflected back to the sensor. If sensor touch human skin, light will be disturbing only by heartbeat. However, if it doesn't touch human skin, there is so many reflector of the light everywhere, which causing many light will be reflected back to the sensor.

Then, sensor's output is compared with reference sensor. Table 1 shows the measurement result of the pulse sensor and Xiaomi Mi Band 2 as a reference instrument. Both instruments have been use at the same time under same condition.

TABLE. 1 COMPARISON OF SENSORS'S RESPONSES

No.	Mi Band 2	Pulse Sensor	Error (%)
1	69	65	1,44
2	66	68	1,51
3	67	65	1,49
4	65	66	1,53
5	70	69	1,42
6	65	65	0
7	69	70	1,44
8	71	70	1,40
9	65	65	0
10	65	67	3,0
		Error	1,32%

As a result, it can be seen that there is difference results obtained between the pulse sensor and the comparator sensor, that it called by error. For 10 times measurement, it obtained error's mean of 1.32%. Error has been calculated by equation:

$$\% \text{ Error} = \frac{\text{Sensor Value} - \text{Reference Value}}{\text{Reference Value}} \times 100$$

In this case, reference value is measurement result using Mi Band 2 and sensor value is measurements results of pulse sensor

Second part was performed by measuring the heart rate of patients with different age. Although the system will be used for infants, but experiments on some types of human age are needed to know the performance of this instrument. As a sample, it used 5 different age variations. The first patient is a woman aged 50 years and above. The second patient is a man aged 50 years and above. The third patient is a man under 25 years old. The fourth patient is a 10 year old female and the last patient is a toddler. Testing is still done by comparing pulse sensors with comparator sensors for 10 times measurements for each patient. The test results will be shown in Fig. 5.

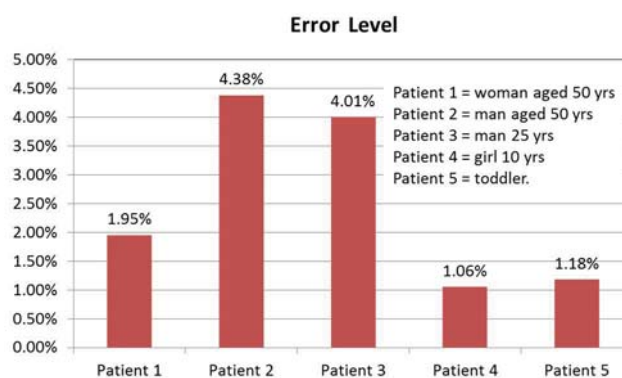


Fig. 5. Error level for several types of human

In the measurements performed for the three adult patients, the results obtained percentage error of 1.954% for the first patient, 4.384% for the second patient and 4,006% for the third patient. In the test of patients with the age of the category of children obtained results of 1.055% for patients 4 and 1.181% for patients 5. This indicates that there is no problem in making measurements using pulse sensors. With error percentage value less than 5% when compared with comparator sensors.

The results of heart rate readings also influenced by several factors such as the position of data retrieval or the laying of sensors in patients and the effects of movement when taking of heart rate data. Heartbeat sensor is very sensitive to movement, alike EKG, digital tension meter that has been equipped with heart rate detector and sensors used in this research, such as pulse sensor. So in this case it is advisable to take data in a minimum movement (stable) state. This research will be applied to premature babies in

incubators that are usually wrapped with scarf, so the movement will be minimalized.

B. Ultrasonic sensor test

This test is performed to see the level of precision generated by Ultrasonic sensor. Ultrasonic sensor is a sensor that utilizes ultrasonic light as the reading medium. This test uses a ruler as a calibrator that serves as a comparator value for the value generated by the ultrasonic sensor. The results of ultrasonic sensor testing can be seen in Table 2.

TABLE. 2 RESPONSES OF THE ULTRASONIC SENSORS

No.	Distance	Measurement Result
1.	30 cm	30,3 cm
2.	35 cm	35,3 cm
3.	40 cm	40,4 cm
4.	45 cm	45,5 cm
5.	50 cm	50,3 cm

The results on five tests by ultrasonic sensors, obtained results that are not much different. By using the percentage error form then obtained error of 0.914% or under 1%. Because the error value generated only about 1%, then the measurement results by the sensor can be said almost close to the appropriate accuracy.

C. Load-cell sensor Test

Tests load cell sensor has been done to determine whether the sensor will be used to work properly. After connecting Arduino Uno on a computer, testing is done by uploading a pre-made program. Then open the Arduino IDE software and the monitor serial window in the software. Then we will see the measurement result of load in Kg. The results of this measurement are shown in the following Table 3.

TABLE. 3 RESPONSES OF THE LOAD-CELL SENSORS

No	Load	Load Cell Sensor
1	1000 gram	968 gram
2	1500 gram	1489 gram
3	2000 gram	1920 gram
4	2500 gram	2480 gram
5	3000 gram	2870 gram

The results obtained after five times of data collection, obtained results that are not much different from the desired value. In this test results obtained an error of 2.6%. With an error rate of only 2.6%, this sensor has a good precision to be used as a premature baby weight sensor.

IV. CONCLUSIONS

Based on the experimental results, it can be concluded that the multisensors system instrument for real time detection has been realized well by using pulse sensor that can read heartbeat, ultrasonic sensor as body length sensing, and load cell as body weight of sensor. As a result, the heartbeat detector has a precision of $\pm 95\%$ when compared to a reference heartbeat detector. The system also can measure the length and weight of the infant with the measurement results are closer to the reference instrument, which average error is not more than 5%. Weak point of this research is the heart detector actually has been not yet used for premature baby caused by technical problem. However, the experiment results are most likely is a good preliminary result in order to build a smart incubator with internet of things method.

REFERENCES

- [1] <http://www.tribunnews.com/kesehatan/2017/02/28/bayi-prematur-penyumbang-terbesar-angka-kematian-bayi>
- [2] F. Nurlandi, "Desain Inkubator Bayi dengan Kontrol Otomatis yang Ekonomis Untuk Klinik Persalinan", [Online], <http://digilib.its.ac.id/public/ITS-Undergraduate-14186-paperpdf.pdf>
- [3] Budiono, "Desain dan Pembuatan Inkubator Berdasarkan Distribusi Temperatur", Jurnal GAMMA, Vol. 8, No 1 : 140 – 147, 2012
- [4] B. Nurcahya, dkk, "Sistem Kontrol Kestabilan Suhu Pada Inkubator Bayi Berbasis Arduino Uno Dengan Matlab/Simulink", Jurnal METTEK, Vol. 2 No 1, pp 35 – 42, 2016
- [5] R. Wijaya, dkk, "Inkubator Bayi Berbasis Mikrokontroler Dilengkapi Sistem Telemetri Melalui Jaringan RS 485", Jurnal Ilmiah Elektroteknika Vol. 12 No. 1: pp.75 – 90, 2013
- [6] K. M. Sholeh (ed), Buku Panduan Manajemen Masalah Bayi Baru Lahir untuk Dokter, Bidan, dan Perawat di Rumah Sakit, Jakarta : IkatanDokter Anak Indonesia, 2005.
- [7] N. F. Wildian, "Rancang Bangun Alat Ukur Tinggi dan Berat Badan Bayi Berbasis Mikrokontroler ATmega8535 Dengan Sensor Fototransistor", Fisika FMIPA, Universitas Andalas, 2014
- [8] W.A. Prasetyanto, "Rancang Bangun Alat Ukur Tinggi Badan Bayi Berbasis Mikrokontroler Atmega 8535". Teknik Elektro, Fakultas Teknik Universitas Dian Nuswantoro. 2003
- [9] Johan K.W, "Sistem Pengukuran Berat Badan dan Tinggi Badan Menggunakan Mikrokontroler Atmega 89S51", Teknik elektro, Fakultas Teknik, Universitas Tarumanegara. 2009
- [10] Hashim, N.M.Z., Ali, N.A., Salleh, A., Jaafar, A.S., Abidin, N.A.Z., "Development of optimal Photosensors Based Heart Pulse Detector," International Journal of Engineering and Technology (IJET), Vol.5, No. 4, pp. 3601-3607, September, 2013
- [11] Wijaya, N.H., Raharja, N.M., Iswanto, "Monitoring the Heart Rate and Body Temperature Based on Microcontroller," Global Journal of Pure and Applied Mathematics, Vol. 13, No. 2, pp. 237-244, 2017.
- [12] Mallick, B., Patro, A.K., "Heart Rate Monitoring System Using Finger Tip Through Arduino and Processing Software", International Journal of Science, Engineering and Technology Research (IJSETR), Vol 5, No. 1, pp. 84-89, January 2016.
- [13] Babiker, S.F., Abdel-Khair, L. E., Elbasheer, S. M., "Microcontroller Based Heart Rate Monitor using Fingertip Sensors," UofKEJ, Vol. 1 No. 2, pp. 47-51, October 2011.
- [14] Felayati, A.A., Inayah, H.N, Pribadi, P.T., Beta, S., "Alat Ukur Berat Benda Berbasis Arduino", Teknik Elektronika Jurusan Teknik Elektronika Politeknik Negeri Semarang.
- [15] Roebuck, J.A., "Anthropometric methods: designing to fit the human body", Human Factors and Ergonomics Society, Santa Monica, 1995.