

Estimation of energy and organic fertilizer generation from small scale tapioca industrial waste

By U Hasanudin; M E Kustyawati; D A Iryani; A Haryanto and S Triyono

HALAMAN PENGESAHAN

- 1. Judul :Estimation of energy and organic fertilizer generation from small scale tapioca industrial waste.
- 2. Penulis :Hasanudin, Udin and **Kustyawati, Maria Erna** and Iryani, Dewi Agustina and Haryanto, Agus and Triyono, Sugeng
- 3. IdentitaspenulissebagaiCorresponden author:
 - a. Nama danGelar :Dr. Maria Erna Kustyawati, M.Sc
 - b. Jeniskelamin :Perempuan
 - c. Gol. Pangkat/NIP :IVa/196111291987032010
 - d. Jabatanfungsional :LektorKepala
 - e. Fakultas/PS :Pertanian/TeknologiHasilPertanian
- 4. Publikasi :IOP Conf. Series: Earth and Environmental Science,
- 5. Volume/Nomor/Halaman :230/012984/1-7
- 6. BentukPublikasi :Artikel
- 7. ISSN/E-ISSN :1755-1315
- 8. Penerbit :IOP Publishing
- 9. TahunPenerbitan :Mei 2019
- 10. Website :http://conferenceseries.iop.org/content/home
- 11. Quartil :


Bandar Lampung, Juli 2020



Mengetahui,
Wakil Dekan Bidang Akademik dan
Kerjasama Fakultas Pertanian Unila

Dr. Purnomo, M.S
NIP 196406131987031002

Penulis



Dr. Maria Erna Kustyawati, M.Sc
NIP 196111291987032010

Mengetahui,
Ketua LPPM Univesitas Lampung



Dr. Lusmelia Afriani, D.E.A
NIP 196505101993032008

UNIVERSITAS LAMPUNG	
Tgl	
No. Inven	
Jenis	
Paraf	19

PAPER · OPEN ACCESS

5

Estimation of energy and organic fertilizer generation from small scale tapioca industrial waste

3

To cite this article: U Hasanudin *et al* 2019 *IOP Conf. Ser.: Earth Environ. Sci.* **230** 012084

View the [article online](#) for updates and enhancements.

**IOP | ebooks™**

Bringing you innovative digital publishing with leading voices to create your essential collection of books in STEM research.

Start exploring the collection - download the first chapter of every title for free.

⁵ **Estimation of energy and organic fertilizer generation from small scale tapioca industrial waste**

U Hasanudin¹, M E Kustyawati¹, D A Iryani², A Haryanto³ and S Triyono³

¹ Study Program of Agro-industrial Technology, Faculty of Agriculture, University of Lampung, Lampung, Indonesia

² Study Program of Chemical Engineering, Faculty of Engineering, University of Lampung, Lampung, Indonesia

³ Study Program of Agriculture Engineering, Faculty of Agriculture, University of Lampung, Lampung, Indonesia

E-mail: udinha65@gmail.com

Abstract. The main of tapioca industrial wastes are cassava fiber, cassava skin, and wastewater. To increase the revenue of tapioca industry, cassava fiber was also extracted to produce energy and the effluent of biogas plant was utilized as organic fertilizer. The aims of this research were to estimate energy generation from tapioca wastewater and cassava fiber and also to estimate Nitrogen and Phosphorous potential from the effluent of biogas plant. This research was conducted in a tapioca factory which was equipped with biogas plant, in Lampung Province, Indonesia. Concentration of COD (Chemicals Oxygen Demand), Total Nitrogen (TN) and total Phosphorous (TP) were measured in the inlet and outlet of biogas plant. Enhancement of biogas production from cassava fiber was also estimated. Flow rate of wastewater and cassava fiber production were also measured. Wastewater generation is 2.75 m³/ton of cassava with COD 9,647.5 mg/l. Electricity production was estimated about 29.96 kWh and 30.44 kWh per ton of cassava from the wastewater and cassava fiber, respectively. The observed tapioca factory could be fulfilling energy needs for drying tapioca process if they utilized wastewater and cassava fiber. The effluent of biogas plant also still has potential to produce about 1.15 and 0.05 kg of TN and TP per ton of cassava, respectively.

⁶ **Introduction**

Lampung Province was well known as the biggest producer of Cassava (*Manihot esculenta Crantz.*) in Indonesia. Cassava production in Lampung Province at 2015 was about 7,387,084 ton [1]. Cassava tuber is raw material of tapioca, bioethanol, food, and other industries. Dealing with tapioca processing, mainly cassava was processed to become tapioca and some derivative products.

Currently, almost all tapioca factory in Lampung Province have been utilized their wastewater for generating biogas energy. The biogas energy was used for generate electricity and/or for drying the tapioca starch. The small scale tapioca factory usually only use the biogas energy for drying tapioca starch and sometimes the energy is not enough to fulfilling their energy demand. They need additional resources, such as cassava fiber to get more biogas energy.

Solid biomass that is generated from tapioca processing in form of skin, tips, and *onggok* (Cassava fiber) are used for cattle feed. There is no significantly effort yet to utilize this biomass for other

important purposes like energy source. The potential of implementation low carbon and zero discharge could be generated from tapioca wastewater. Renewable energy was generated from tapioca wastewater through anaerobic digestion by converting organic matters to methane gas. Tapioca factory wastewater has very high amount and concentration of organic matter [2]. The methane potential of tapioca industry has investigated using laboratory scale equipment, measured this potential for effluent mixed with cow dung and urea [3]. The methane potential from anaerobic sludge obtained from an anaerobic pond of a tapioca starch factory was measured using a specific methanogenic activity test [4]. Biogas production rate in anaerobic ponds of tapioca starch factories was investigated [5]. Conversion technology to produce biogas from tapioca wastewater was develop and implemented in some tapioca industry, but utilization of cassava fiber together with tapioca industrial wastewater for producing more biogas was not investigated completely yet. We need some development on how to increased soluble material from cassava fiber which is easily to convert to biogas by anaerobic digestion.

The effluent of biogas plant needs additional treatment to fulfilling the national effluent standard. Anaerobic digestion of tapioca wastewater under biogas plant usually only reducing COD about 90%, it is not enough to fulfilling the national effluent standard [6]. Under anaerobic digestion mainly only carbon based organic matters was decomposed become methane and carbon dioxide. The effluent of biogas plant is still containing nitrogen, phosphorous, and some others minerals which is could be used as a liquid organic fertilizer and at the same time will prevent eutrophication [7]. The risk of utilization of wastewater for land application was investigated [8] but benefit potential of the biogas plant effluent in tapioca industry was not investigated yet. The objectives of this study were to estimated energy generated from the utilization of tapioca wastewater and cassava fiber. The possibility of the utilization biogas plant effluent as liquid fertilizer was also investigated.

2. Method

Study was conducted in a small scale tapioca factory, PD. Semangat Jaya, village of Sri Rejeki, Sub District Negri Katon, District of Pesawaran, Lampung Province, Indonesia. Real production capacity, wastewater flow rate, and cassava fiber production were measured for several days' operation of the tapioca factory. The schematic diagram of sampling location was described in Figure 1. Flow meters were installed at inlet wastewater streams (Q) to measure the wastewater flow rate. Gas sample was also collected at outlet pipe line (G) of biogas plant to measure biogas composition. Secondary data from other tapioca industry which is has more accurate instrument to measure biogas production was also utilized to estimate potential biogas production. Wastewater sampling and laboratory analysis were conducted to measure pH, COD (Chemical Oxygen Demand), TN (Total Nytrogen), TP (total Phosporous) in some stream of wastewater treatment plant. Samples were collected at least 3 hours after tapioca factory start operation. Parameters, frequently, sampling location, and measurement methods in this monitoring system were described in Table 1. The schematic diagram of sampling location was described in Figure 1.

Table 1. Parameters, frequency, sampling location, and method in monitoring system of tapioca wastewater.

Parameter	Frequency	Sampling location	Method
pH	4 times	C _{in} and C _{out}	On-site
Wastewater flow rate	6 times	C _{in}	
COD	6 times	C _{in} and C _{out}	Analysis at laboratory
TN	4 times	C _{in} and C _{out}	
TP	4 times	C _{in} and C _{out}	

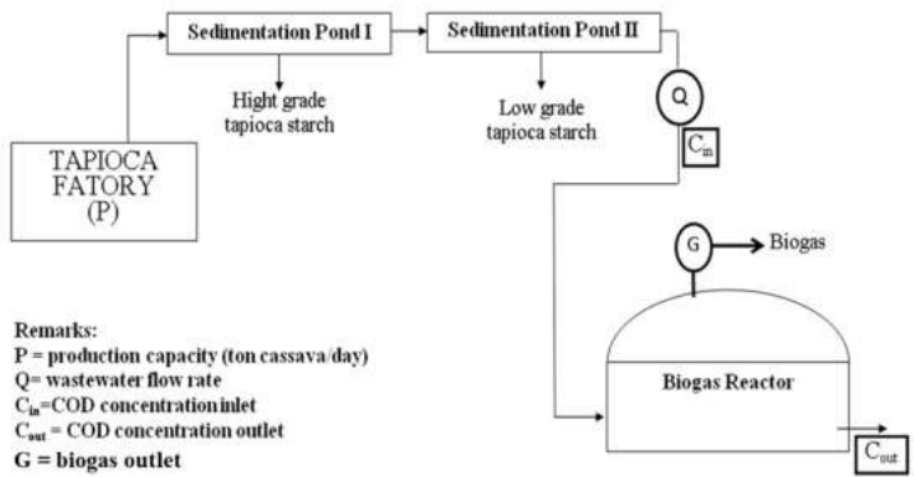


Figure 1. Schematic diagram of sampling location.

Pre-treatment technology was also developed to increase soluble material content of cassava fiber. *Aspergillus niger* was used as decomposer of cassava fiber to become more soluble material. Soluble COD was evaluated under different fermentation time and concentration of cassava fiber.

3. Result and Discussion

3.1. Energy generation from tapioca wastewater and cassava fiber

The actual production capacity of the observed tapioca factory was about 27.150 ton of cassava per day and produced 74.55 m³ of wastewater. The wastewater was treated in biogas reactor to reduce the environmental load and produce biogas, simultaneously. The average of COD_{in} and COD_{out} are 9,647.5 mg/L of and 781.7 mg/L, respectively (Table 2).

Table 2. Quality and flow rate of wastewater from observed tapioca factory.

Observation number	Processed cassava (ton/day)	Wastewater generated (m ³ /day)	COD _{in} (mg/L)	COD _{out} (mg/L)
1	27.73	78.36	10,595	510
2	22.79	66.47	7,980	975
3	30.71	71.80	11,870	705
4	16.80	55.98	10,070	700
5	32.00	93.34	6,610	910
6	32.93	81.32	10,760	890
Average	27.16	74.55	9,647.5	781.7

Based on the measurement result, the average of wastewater production was 2.75 m³/ton of cassava. This value was quite low compare with other factories. The factory was implemented separation of wastewater from cassava washing and from extraction; the wastewater is from extraction only. COD concentration of wastewater is about 9,647.5 mg/l. This value was relatively low due to before enter to biogas reactor; the wastewater was entered in two steps of sedimentation pond. The sediment was collected before entering biogas reactor. The wastewater production rate and COD

concentration of the wastewater will be used for estimated methane gas generated from tapioca wastewater. Methane gas generated from the wastewater was estimated using equation 1:

$$CH4_{ww} = \frac{COD_{in} - COD_{out}}{1000} * Q * 0.35 \quad (1)$$

Where:

- $CH4_{ww}$ = methane gas generated from the tapioca wastewater (m³/day)
- COD_{in} = COD concentration in the inlet of biogas reactor (mg/l)
- COD_{out} = COD concentration in the outlet of biogas reactor (mg/l)
- Q = flow rate of wastewater (m³/day)
- 0.35 = potential of methane generated (m³/kg COD removal)^[9]

Using the equation we can estimate the potential of methane generated per day in the observed tapioca factory. Based on the potential of methane generated we can estimate energy generated from the wastewater. Table 3 described the potential of methane production and power generated from tapioca wastewater. Heating value of methane was used to calculate the energy generation from the wastewater using the following equation:

$$P = \frac{CH4_{ww} * LHv}{24} * 0.35 * \frac{1}{3600} \quad (2)$$

Where:

- P = power generation (MW)
- LHv = Low Heating Value of methane (=35.8 MJ/Nm³)^[10; 11]
- 0.35 = Conversion efficiency from biogas to electricity^[11]

Table 3. The potential of methane production, energy and power generated from tapioca wastewater.

Observation number	Cassava processed (ton/day)	Methane Potential (Nm ³ /day)	Heat Potential (MJ/day)	Heat Potential (MJ/ton cassava)	Power Potential (kW)	Electricity Potential (kWh/ton cassava)
1	27.73	276.59	9,901.97	357.08	40.11	34.72
2	22.79	162.97	5,834.25	256.00	23.63	24.89
3	30.71	280.58	10,044.64	327.08	40.69	31.80
4	16.8	183.59	6,572.39	391.21	26.62	38.03
5	32.00	186.21	6,666.44	208.33	27.01	20.25
6	32.93	284.37	10,180.60	309.16	41.24	30.06
Average	27.16	229.05	8,200.05	308.14	33.22	29.96

Energy potential from the wastewater is relatively low and not enough for fulfilling the energy needs during drying process. Based on amount of water should be evaporated during drying tapioca is about 0.2 ton water/ton of cassava, the energy need for drying is about 450 MJ/ton of cassava. One of the other resources that have possibility to produce energy is cassava fiber. Cassava fiber has potential to produce biogas through anaerobic digestion but need additional process to increase the soluble COD (SCOD). SCOD is easily biodegradable materials which are easy to convert to biogas through anaerobic digestion. *Aspergillus niger* was used to digest insoluble organic matters become soluble organic matters. The effluent of biogas reactor was used to dilute cassava fiber and has succeeded to improve pH of cassava fiber solution. Soluble material also increases during 5 days fermentation with *Aspergillus niger*. Figure 2 described the increased of SCOD concentration after inoculation of 0.1%

(v/v) of *Aspergillus niger* at different concentration of cassava fiber and fermentation time. Methane production potential from cassava fiber was could be estimated using equation 3 as follow:

$$CH_{4cf} = \frac{SCOD \cdot R}{1000} * Cf * D * 0.35 \quad (3)$$

Where:

CH_{4cf} = methane gas generated from the cassava fiber (m³/day)

SCOD = Soluble COD concentration (mg/l)

R = SCOD removal during anaerobic digestion (95%)

Cf = Cassava fiber production (ton/day)

D = Dilution rate of cassava fiber

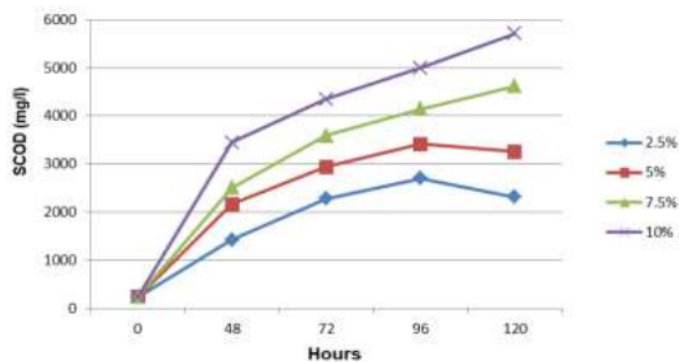


Figure 2. SCOD concentration during fermentation with *Aspergillus niger*.

Based on SCOD concentration in Figure 2, methane production potential from cassava fiber was estimated. Table 4 describes methane production potential from of cassava fiber after fermentation 120 hours. Using equation 2, power generation potential from cassava fiber also could be estimated. Table 5 describe energy and power generation from cassava fiber in tapioca factory. Methane production potential from 7.5% of cassava fiber solution was higher than that 10%, 5%, and 2.5% of cassava fiber solutions. To high concentration of cassava fiber hampered decomposition rate during fermentation. Further estimation was based on methane production potential from 7.5% of cassava fiber.

Table 4. Methane production potential from cassava fiber after 120 hours fermentation.

Observation number	Cassava processed (ton/day)	Cassava fiber production ^{*)} (ton/day)	Methane production (Nm ³)	
			Cassava fiber 7.5%	Cassava fiber 10%
1	27.73	11.80	241.71	223.86
2	22.79	9.70	198.65	183.98
3	30.71	13.07	267.69	247.92
4	16.8	7.15	146.44	135.62
5	32.00	13.62	278.93	258.33
6	32.93	14.01	287.04	265.84
Average	27.16	11.56	236.74	219.26

Note: ^{*)} Average yield of wet cassava fiber is 42.56% (based on other measurement).

Table 5. Energy and power generation from cassava fiber in tapioca factory.

Observation number	Cassava processed (ton/day)	Methane Potential (Nm ³ /day)	Heat Potential (MJ/day)	Heat Potential (MJ/ton cassava)	Power Potential (kW)	Electricity Potential (kWh/ton cassava)
1	27.73	241.71	8,653.29		35.05	
2	22.79	198.65	7,111.73		28.81	
3	30.71	267.69	9,583.21		38.82	
4	16.8	146.44	5,242.52	312.06	21.24	30.34
5	32.00	278.93	9,985.76		40.45	
6	32.93	287.04	10,275.97		41.63	
Average	27.16	236.74	8,475.41		34.33	

These results revealing that small scale tapioca factory could be increased the energy and power more than double by utilization wastewater and cassava fiber. The energy generated from wastewater and cassava fiber has potential to fulfilling energy consumption in tapioca drying process.

3.2. Estimation of Organic Fertilizer from Tapioca Wastewater

Monitoring of nitrogen and phosphorous concentration in the wastewater was done to evaluate the impact to eutrophication and their potential to utilize as liquid fertilizer. Table 6 describe total nitrogen (TN) and total phosphorous (TP) concentration in inlet and outlet of biogas reactor. It also indicated that TN and TP relatively not change during anaerobic digestion in biogas reactor. Anaerobic digestion decomposed macro-molecule of nitrogen and phosphorous compounds to become simple molecule, such as NH⁴⁺ and PO₄. These molecules were still measured as TN and TP.

Table 6. Total nitrogen, total phosphor and pH in tapioca wastewater.

Observation number	Sampling Location	pH	TN (mg/L)	TP (mg/L)
1	Inlet Biogas reactor	3.85	328.3	22.7
	Outlet Biogas reactor	6.49	402.4	17.2
2	Inlet Biogas reactor	3.85	317.2	23.7
	Outlet Biogas reactor	6.49	415.3	18.2
3	Inlet Biogas reactor	4.3	336.12	24.14
	Outlet Biogas reactor	6.54	434.2	18.9
4	Inlet Biogas reactor	4.12	320.6	29.3
	Outlet Biogas reactor	6.36	406.9	19.0

The effluent of observed biogas reactor was utilized as liquid fertilizer. The average of TN and TP concentrations in the effluent of biogas reactor were 412.6 and 17.0 mg/L, respectively. Considered to the amount of wastewater produced is 2.75 m³/ton of cassava, the effluent biogas reactor has potential to produce about 1.13 kg of TN and 0.05 kg of TP per ton of cassava. High concentration of TN and TP in treated tapioca wastewater were potential to promote eutrophication, but in other side is very important for crops nutrients.

4. Conclusion

About 2.75 m³ of wastewater with average COD concentration 9,648 mg/l was produced from each ton of cassava in small scale tapioca factory. Using covered lagoon system about 92% of COD was removed. Utilization of tapioca wastewater and cassava fiber has potential to generate 29.96 and 30.34 kWh of electricity per ton of cassava, respectively. If they utilized wastewater and cassava fiber for generate energy, the observed tapioca factory could be fulfilling whole energy needs for drying tapioca process. The treated wastewater contained about 1.15 kg of Nitrogen and 0.05 kg of Phosphorous per ton of Cassava. Utilization of tapioca wastewater for renewable energy and liquid fertilizer increased the sustainability of small scale tapioca industry.

References

- [1] Central Bureau of Statistics 2016 Areal and Production of Cassava 2015. <https://www.bps.go.id/linkTableDinamis/view/id/880>. [Accessed on 25 September 2017].
- [2] Hasanudin U 2007 *Biogas production from agro-industries wastewater*. Workshop on "Commercialization of Renewable Energy Recovery from Agroindustry Wastewater", February 1st 2007, University of Lampung, Lampung Indonesia
- [3] Manilal V B, Narayanan C S, Balagopalan C 1990 Anaerobic digestion of cassava starch factory effluent *World J Microbiol. Biotechnol.* **6** 149-154.
- [4] Rajbhandari B K, Annachhatre A P 2004 Anaerobic ponds treatment of starch wastewater: case study in Thailand *Bioresour. Technol.* **95** 2 135-143.
- [5] Kamahara H, Hasanudin U, Atsuta Y, Widiyanto A, Tachibana R, Goto N, Daimon H, Fujie K 2010 Methane emission from anaerobic pond of tapioca starch extraction wastewater in Indonesia *J. Ecotechnol. Res.* **15** 2 79-83.
- [6] Hasanudin U 2011 Model of Zero Waste System on Small Scale Tapioca Factory. Proceeding of Workshop on Environmental Protection and Regional Development, Yokohama National University, Japan.
- [7] Hasanudin U, Utomo T P, Suroso E, Shivakoti B R, Fujie K 2014 Sustainable Wastewater Treatment in Small Scale Tapioca Factory Proceeding of 9th IWA International Symposium on Waste Management Problems in Agroindustries. The International Water Association, Kochi, Japan.
- [8] Abdu N, Abdulkadir A, Agbenin J O, Buerkert A 2011 Vertical distribution of heavy metals in wastewater irrigated vegetable garden soils of three West African cities *Nutr. Cycl. Agroecosyst.* **89** 387-397.
- [9] IPCC 2006 IPCC Guidelines for National Greenhouse Gas Inventories (Vol. 4), Prepared by The National Greenhouse Gas Inventories Programme, Eggleston H S, Buendia L, Miwa K, Ngara T, Tanabe K (Eds). IGES Japan.
- [10] Waldheim L, Nilson T 2001 Heating Value of Gases from Biomass Gasification. Report prepared for: IEA Bioenergy Agreement, Task 20 - Thermal Gasification of Biomass. TPS Termiska Processer AB, Studsvik, 611 82 Nyköping.
- [11] Banks C 2011 Anaerobic Digestion and Energy. School of Civil Engineering and Environment University of Southampton Southampton UK.

Estimation of energy and organic fertilizer generation from small scale tapioca industrial waste

ORIGINALITY REPORT

16%

SIMILARITY INDEX

PRIMARY SOURCES

- 1** L P Wigati, Sutrisno, E Darmawati. "Losses and waste of tomato and red chilli along the supply chain", IOP Conference Series: Earth and Environmental Science, 2019
Crossref 138 words — 5%
- 2** R Pramulya, T Bantacut, E Noor, M Yani. "Material flow analysis for energy potential in coffee production", IOP Conference Series: Earth and Environmental Science, 2019
Crossref 86 words — 3%
- 3** mafiadoc.com
Internet 68 words — 2%
- 4** umpir.ump.edu.my
Internet 50 words — 2%
- 5** repository.lppm.unila.ac.id
Internet 26 words — 1%
- 6** www.acb-net.com
Internet 23 words — 1%
- 7** D. I. Kusumastuti, D. Jokowinarno, S. N. Khotimah, C. Dewi, F. Yuniarti. "Infiltration well to reduce the impact of land use changes on flood peaks: a case study of Way Kuala Garuntang catchment, Bandar Lampung, Indonesia", Hydrology and Earth System Sciences Discussions, 2014
Crossref 22 words — 1%
- 8** D Cahyani, A Haryanto, G A Putra, R Fil'aini, D S S Marpaung. "Life cycle assessment of biogas digester in 17 words — 1%

small scale tapioca industry", IOP Conference Series: Earth and Environmental Science, 2019

Crossref

9	iopscience.iop.org Internet	10 words — < 1%
10	pertambangan.fst.uinjkt.ac.id Internet	8 words — < 1%
11	livewaste.org Internet	8 words — < 1%
12	Chayanon Sawatdeenarunat, Chinnapong Wangnai, Warinthorn Songkasiri, Pornpan Panichnumsinsin et al. "Biogas Production From Industrial Effluents", Elsevier BV, 2019 Crossref	7 words — < 1%

EXCLUDE QUOTES ON

EXCLUDE MATCHES OFF

EXCLUDE BIBLIOGRAPHY ON