



Digital Receipt

This receipt acknowledges that Turnitin received your paper. Below you will find the receipt information regarding your submission.

The first page of your submissions is displayed below.

Submission author: Lilis Hermida
Assignment title: pdf files
Submission title: Reusability Study of Sulfated Zircon...
File name: fuly-lilis_-juni2019.pdf
File size: 354.75K
Page count: 4
Word count: 1,952
Character count: 10,595
Submission date: 22-Jan-2021 05:26AM (UTC+0700)
Submission ID: 1491772697

Journal of Engineering and Scientific Research (JESR) – p-ISSN: 2685-0338; e-ISSN: 2685-1695

Reusability Study of Sulfated Zirconia Functionalized SBA-15 Catalyst for Biolubricant Oil Production from Oleic Acid

F.R. Rangganita¹, L. Hermida^{1*}, A. Angraeni¹, D. Khoirunnisa¹

¹Department of Chemical Engineering, Faculty of Engineering, Universitas Lampung, Jl. Prof. Samantri Brojongeger No. 1 Gedung Meneng Rajabasa Bandar Lampung-35145, Lampung, Indonesia
email: lilis.hermida@eng.unila.ac.id

Article Information:

Received:
16 March 2019
Received in revised form:
20 May 2019
Accepted:
10 June 2019
Volume 1, Issue 1, June 2019
pp 42 – 45
© Universitas Lampung
<https://doi.org/10.23959/jesr-v1i1-9>

Abstract

Sulfated zirconia functionalized SBA-15 catalyst (SZ-SBA-15) was prepared by reacting SBA-15 with Zirconiumtetrachloride and urea at 90°C to form SZ-SBA-15. Then, SZ-SBA-15 was reacted with H₂SO₄ room temperature to produce SZ-SBA-15 catalyst. The catalyst was characterized in terms of adsorption-desorption nitrogen analysis, SEM-EDX and FTIR. Based on SEM-EDX and adsorption-desorption nitrogen analysis results, it was found that Zr had been incorporated in SBA-15. By using the SZ-SBA-15 catalyst, esterification reaction of oleic acid with TMP to produce biolubricant oil of Trimethylolpropanetriacetate achieved 85% oleic acid conversion and selectivity of 63%. Reusability study of SZ-SBA-15 catalyst was carried out for 3 rounds of reaction. It was found that the catalyst could be used up to 3 rounds without significant decrease in activity.

Keywords: biolubricant oil, catalyst reusability, sba-15, sulfated zirconia.

1. INTRODUCTION

LUBRICANT oil based on petroleum industry has caused environment pollution. Besides that, the lubricant oil is made from un-renewable source and the source is limited. As such, biolubricant production based on renewable sources, for example: vegetables oil, has become the solution to overcome the problem. In addition, biolubricant oil gives other advantages such as cheap, biodegradable and no effect on environmental. Currently, the esterification of oleic acid with trimethylolpropane (TMP) is used in the industry for the synthesis of biolubricant. This reaction is generally catalyzed by homogeneous acidic catalyst that usually need additional processes i.e. separation, neutralization and product purification [1]. Solid acid catalyst offers more advantages than homogeneous acidic catalyst in the process as it is no need the additional processes and reusable.

In this research, mesoporous SBA-15 has been incorporated to sulfated zirconia to produce solid acid catalyst that has thermal stability with large surface area and large pore size. This catalyst has been studied for esterification of cyclohexanol with acetic acid [2], fatty acid with methanol for biodiesel [3] and glycerol with fatty acid to monoglyceride [4]. It was reported that sulfated zirconia functionalized SBA-15 catalyst (SZ-SBA-15) gave high activity and high conversion caused by its large surface area. Various SZ-SBA-15 catalysts with different structures have been studied for reaction of oleic acid esterification with trimethylolpropane to produce biolubricant oil of trimethylolpropane triacetate (TMPOTO) [1]. However, reusability study of SZ-SBA-15 for the oleic acid esterification has not been reported, in this study, reusability of SZ-SBA-15 was carried out up to three times for reaction of oleic acid esterification with trimethylolpropane to produce the biolubricant oil.

Reusability Study of Sulfated Zirconia Functionalized SBA-15 Catalyst for Biolubricant Oil Production from Oleic Acid

by Lilis Hermida

Submission date: 22-Jan-2021 05:26AM (UTC+0700)

Submission ID: 1491772697

File name: fuly-lilis_-juni2019.pdf (354.75K)

Word count: 1952

Character count: 10595

Reusability Study of Sulfated Zirconia Functionalized SBA-15 Catalyst for Biolubricant Oil Production from Oleic Acid

F R Rangganita¹, L Hermida^{1,*}, A Angraeni¹, D Khoirunnisa¹

¹Department of Chemical Engineering, Faculty of Engineering, Universitas Lampung, Jl. Prof. Sumantri Brojonegoro No. 1 Gedong Meneng Rajabasa Bandar Lampung-35145, Lampung, Indonesia

*email: lilis.hermida@eng.unila.ac.id

Article Information:

Received:
16 March 2019

Received in revised form:
20 May 2019

Accepted:
10 June 2019

Volume 1, Issue 1, June 2019
pp 42 – 45

© Universitas Lampung

<http://dx.doi.org/10.23960/jesr.v1i1.9>

Abstract

Sulfated zirconia functionalized SBA-15 catalyst (SZr-SBA-15) was prepared by reacting SBA-15 with Zirconiumoxychloride and urea at 90°C to form ZrO₂-SBA-15. Then, ZrO₂-SBA-15 was reacted with H₂SO₄ at room temperature to produce SZr-SBA-15 catalyst. The catalyst was characterized in terms of adsorption-desorption nitrogen analysis, SEM-EDX and FTIR. Based on SEM-EDX and adsorption-desorption nitrogen analysis results, it was found that Zr had been incorporated in SBA-15. By using the SZr-SBA-15 catalyst, esterification reaction of oleic acid with TMP to produce biolubricant oil of Trimethylpropanetrioleat achieved 85% oleic acid conversion and selectivity of 63,7%. Reusability study of SZr-SBA-15 catalyst was carried out for 3 rounds of reaction. It was found that the catalyst could be used up to 3 rounds without significant decrease in activity

Keywords: biolubricant oil, catalyst reusability, sba-15, sulfated zirconia.

I. INTRODUCTION

LUBRICANT oil based on petroleum industry has caused environment pollution. Besides that, the lubricant oil is made from unrenewable source and the source is limited. As such, biolubricant production based on renewable sources, for example: vegetables oil, has become the solution to overcome the problem. In addition, biolubricant oil gives other advantages such as cheap, biodegradable and no effect on environmental. Currently, the esterification of oleic acid with trimethylolpropane (TMP) is used in the industry for the synthesis of biolubricant. This reaction is generally catalyzed by homogeneous acidic catalyst that usually need additional processes i.e. separation, neutralization and product purification [1]. Solid acid catalyst offers more advantages than homogeneous acidic catalyst in the process as it is no need the additional processes and reusable.

In this research, mesoporous SBA-15 has been incorporated to sulfated zirconia to produce solid acid catalyst that has thermal stability with large surface area and large pore size. This catalyst has been studied for esterification of cyclohexanol with acetic acid [2], fatty acid with methanol for biodiesel [3] and glycerol with fatty acid to monoglyceride [4]. It was reported that sulfated zirconia functionalized SBA-15 catalyst (SZr-SBA-15) gave high activity and high conversion caused by it large surface area. Various SZr-SBA-15 catalysts with different structures have been studied for reaction of oleic acid esterification with trimethylolpropane to produce biolubricant oil of trimethylolpropane trioleat (TMPTO) [1]. However, reusability study of SZr-SBA-15 for the oleic acid esterification has not been reported, in this study, reusability of SZr-SBA-15 was carried out up to three times for reaction of oleic acid esterification with trimethylolpropane to produce the biolubricant oil.

II. MATERIALS AND METHODS

A. Preparation of SBA-15

The synthesis of SBA-15 was prepared according to the method as described in literature [4-5]. Four grams of pluronic as a template was dissolved in 30 ml distilled water and 120 ml HCl 2M at room temperature. Then, the solution was heated to 60°C on a hotplate. TEOS as silica source was added to the solution and stirred for 30 min with stirring rate of 750 rpm. When the colour of the solution change to white, the stirring rate was decreased to 300 rpm and kept this condition for further 20 h. The solution then was transferred to Erlenmeyer and aged at 80°C for 48 h in a waterbath. After that, the solid product was filtered, washed with distilled water and dried in an oven at 120°C for 12 h. Calcination was carried out in a furnace at 550°C for 6 h to produce SBA-15.

B. Preparation of SZr-SBA-15

SZr-SBA-15 catalyst was prepared by using a method as describe in literature [2] except the amount of sulfated zirconia. Four grams of SBA-15 (heated in oven at 120°C for 4 h) was added to solution of 0.5508 g zirconium oxychloride, 1.083 g of urea and 120 ml distilled water. The mixture was stirred and refluxed at 90°C for 6 h to form ZrO₂-SBA-15. The mixture was filtered, washed, dried at 100°C for 24 h in an oven and calcined in a furnace at 550°C for 6 h. The solution of H₂SO₄ was added to ZrO₂-SBA-15 at room temperature to form SZr-SBA-15. Finally, the solid product was filtered, dried at 110°C and calcined at 550°C for 3 h in a furnace.

C. The Reusability Test of SZr-SBA-15 Catalyst for the Esterification of Oleic Acid with TMP

The reaction was performed in a necked flat bottom flask equipped with water separator and thermometer on a stirring hotplate. Oleic acid and Trimethylolpropane (TMP) with molar ratio 3:1 were placed in the flask, then, 5% w/w catalyst (based on weight of oleic acid) was added to it. The reaction was taken place at 150°C for 5 h with stirring rate 750 rpm. After the reaction was completed, the samples of product were taken out and filtered to take the catalyst. The former catalyst was washed with hexane solution to remove the oil that still stack on the catalyst and dried at 80°C for 24 h in an oven. The former catalyst then used to the same procedure of esterification (reusability) up to 3 times reaction.

III. RESULTS AND DISCUSSIONS

A. Characterization of Catalyst.

The result of N₂ adsorption-desorption analysis are shown in Fig.1. Based on the result, the adsorption-desorption isotherms curves for SBA-15 and SZr-SBA-15 had the same type, a curve that shown the mesostructure of the material. It is shown that the process of SZr incorporation in SBA-15 did not change the mesostructural characteristic.

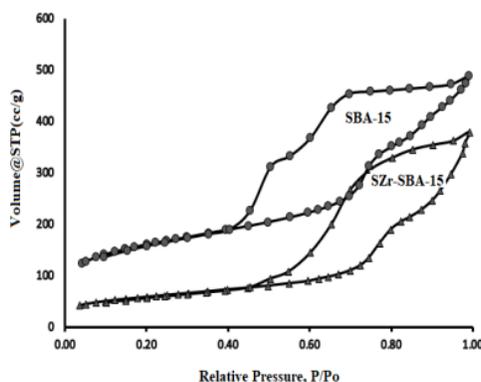


Figure 1. Adsorption-desorption curves of SBA-15 and SZr-SBA-15

The properties such as surface area, pore volume and pore size of SBA-15 and SZr-SBA-15 are shown in Table 1.

Table 1. The Properties of Materials

| No | Materials | Surface Area (m ² /g) | Pore Volume (cc/g) | Pore Size (Å) |
|----|-----------|----------------------------------|--------------------|---------------|
| 1 | SBA-15 | 672.097 | 0.795 | 38.584 |
| 2 | SZrSBA15 | 413.336 | 0.693 | 65.781 |

The pore size and surface area for SBA-15 are 529.219 m² g⁻¹ dan 38.584 Å, it was comparable to a previous publication [4,6] suggesting that SBA-15 has surface area with range 500-1500 m² g⁻¹ and pore size 20-500 Å. Besides that, the pore size increase after the incorporation, indicated that SZr is mainly incorporate into the pore of SBA-15. The increasing of pore size was caused by silica dissolution reaction when the incorporation taken place [7].

SEM image of SBA-15 and SZr-SBA-15 are shown in Fig 2. All of SEM images shown the cylinder hexagonal forms as suggested in the literature [5].

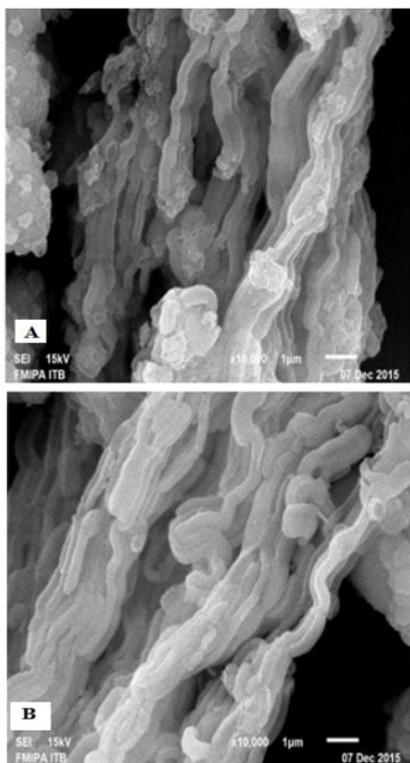


Figure 2. SEM Images of a) SBA-15 ; b) SZr-SBA-15

Incorporation of sulfated zirconia in SBA-15 was monitored by EDX spectrum. According to the analysis result, there were Zr peaks in SZr-SBA-15 spectrum as shown in Fig 3 at around 0.5 and 2 keV. The Zr peak location were agreed as reported in the literatures [Bhanjana,2016]. This indicated that sulfated zirconia could be successfully incorporated in SBA-15.

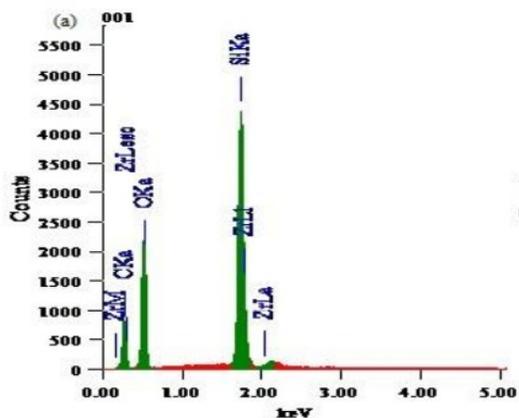


Figure 3. EDX Spectrum SZr-SBA-15

The presence of C-SZr bond in SBA-15 was also confirmed by FTIR Spectrum as shown in Fig. 4. The vibration at 800 cm^{-1} to 1260 cm^{-1} are attributed to Si-O-Si bond that presented in SBA-15 while the vibration at 613 cm^{-1} is related to C-SZr bond.

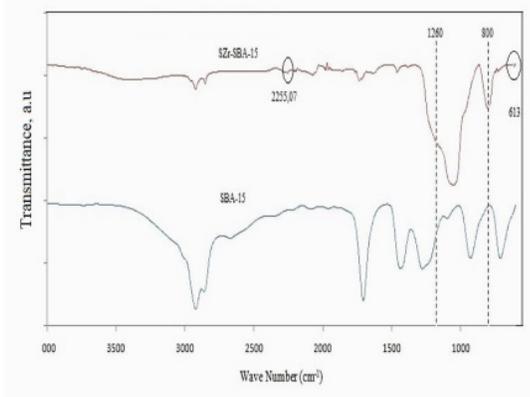


Figure 4. FTIR Spectrum of SBA-15 and SZr-SBA-15

B. Esterification of Oleic Acid with TMP and The Reusability .

Conversion and selectivity of TMPTO was determined by GC-MS analysis. Based on data in Figure 5, it shows that esterification of oleic acid with TMP using SZr-SBA-15 offered 85,9% conversion with 63,7% selectivity. This conversion did not decrease significantly in the second cycle (83,3%) and third cycle (82,02%) of usage in the esterification to produce TMPTO. It was shown that SZr-SBA-15 was the effective catalyst for the esterification of oleic acid with TMP to produce biolubricant of TMPTO and also had the ability to be reused. The decreasing of selectivity would be caused by carbon that closed the pore of catalyst during the reaction.

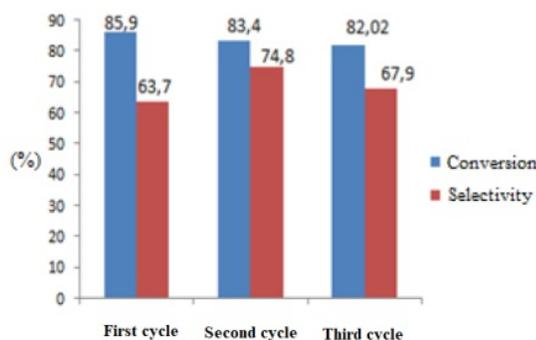


Figure 5. Oleic acid conversion and TMPTO Selectivity

IV. CONCLUSION

We have shown that the synthesis of catalyst SZr-SBA-15 has successfully based on N₂ adsorption-desorption analysis and SEM-EDX analysis results. Sulfated Zirconia functionalized SBA-15 was efficient catalyst for esterification of oleic acid with trimethylolpropane to produce TMPTO and gave conversion more than 85% and selectivity more than 60%. The catalyst also can be reused up to 2 times in the esterification without significant decrease in activity.

ACKNOWLEDGMENT

PKM (Program Kreativitas Mahasiswa) grant from Ministry of Research, Technology and higher Education (Kemenristek Dikti), Indonesia and Senior BLU (Badan Layanan Umum) grant from University research grant, Universitas Lampung to support this research work are gratefully acknowledged.

REFERENCES

- [1]. L. Hermida, "Inkorporasi zirconia tersulfat ke dalam SBA-15 sebagai katalis heterogen pada pembuatan minyak pelumas bio dari asam oleat" presented at the 1st Faculty of Engineering Colloquium, Universitas Lampung, Indonesia, 6 December 2018
- [2]. S. Garg, K. Soni, G.M. Kumaran, R. Bal and K. Gora-Marek, (2009, March). Acidity and Catalytic Activities of Sulfated Zirconia Inside SBA-15. *Catal. Today*, [Online]. 141, (1-2), pp.25-129. Available: <https://www.sciencedirect.com/science/article/pii/S0920586108001259>
- [3]. X.R.Chen, Y.H. Ju and C. Y. Mou, (2007, November). Direct synthesis of mesoporous sulfated silica zirconia catalysts with high catalytic activity for biodiesel via esterification. *J. Phys. Chem.*, [Online] 143, pp. 616- 626. Available: <https://pubs.acs.org/doi/10.1021/jp0749221>
- [4]. L. Hermida, Z. Ahmad Abdullah., R.M. Abdul. 2010. Post Synthetically Functionalized SBA-15 with Organosulfonic Acid and Sulfated Zirconia for Esterification of Glycerol to Monoglyceride. *Journal of Applied Sciences* [Online] 10 (24), pp. 3199-3206. Available: <https://scialert.net/abstract/?doi=jas.2010.3199.3206>
- [5]. D. Zhao, Q. Huo, J. Feng, B.F. Chmelka and G.D. Stucky (1998, June) Nonionic triblock and star diblock copolymer and oligomeric surfactant syntheses of highly ordered, hydrothermally stable, mesoporous silica structures, *J. Am. Chem. Soc.* [Online] 20(124), pp. 6024-6036. Available: <https://pubs.acs.org/doi/10.1021/ja974025i>
- [6]. Degirmenci, D. Uner, B. Cinlar., B. H. Shanks, A. Yilmaz., R. A. van Santen, E.J. M. Hensen (2011, January). Sulfated Zirconia Modified SBA-15 Catalysts for Cellobiose hydrolysis, *Catal. Letter*, [Online] 141(1), pp.33-42. Available: <https://link.springer.com/article/10.1007/s10562-010-0466-1>
- [7]. L. Hermida, A.Z. Abdullah, A.R. Mohammed (2013, January). Synthesis and Characterization of Mesostructured Cellular Foam (MCF) Silica Loaded with Nickel Nanoparticles as a Novel Catalyst. *Material Sciences and Applications*, [Online] ,19 , pp. 835-846. Available: <https://www.scirp.org/journal/PaperInformation.aspx?PaperID=27075>
- [8]. G. Bhanjana, N. Dilbaghi, S. Chaudhary, K.H Kim, S. Kumar (2016, April) Robust and direct electrochemical sensing of arsenic using zirconia nanocubes, *Analyst* [Online], 141 pp. 4211-4218. Available: <https://pubs.rsc.org/en/content/articlelanding/2016/an/c5an02663f#!divAbstract>

Reusability Study of Sulfated Zirconia Functionalized SBA-15 Catalyst for Biolubricant Oil Production from Oleic Acid

ORIGINALITY REPORT

9%

SIMILARITY INDEX

3%

INTERNET SOURCES

6%

PUBLICATIONS

3%

STUDENT PAPERS

PRIMARY SOURCES

1

Submitted to Institute of International Studies

Student Paper

2%

2

Dongyuan Zhao, Qisheng Huo, Jianglin Feng, Bradley F. Chmelka, Galen D. Stucky. "Nonionic Triblock and Star Diblock Copolymer and Oligomeric Surfactant Syntheses of Highly Ordered, Hydrothermally Stable, Mesoporous Silica Structures", Journal of the American Chemical Society, 1998

Publication

2%

3

Lilis Hermida, Hadis Amani, Samrand Saeidi, Ahmad Zuhairi Abdullah, Abdul Rahman Mohamed. "Selective acid-functionalized mesoporous silica catalyst for conversion of glycerol to monoglycerides: state of the art and future prospects", Reviews in Chemical Engineering, 2017

Publication

1%

4

jesr.eng.unila.ac.id

Internet Source

1%

| | | |
|----|--|-----|
| 5 | pubs.rsc.org Internet Source | 1% |
| 6 | scialert.net Internet Source | 1% |
| 7 | www.degruyter.com Internet Source | <1% |
| 8 | Lilis Hermida, Hadis Amani, Samrand Saeidi, Ahmad Zuhairi Abdullah, Abdul Rahman Mohamed. "Selective acid-functionalized mesoporous silica catalyst for conversion of glycerol to monoglycerides: state of the art and future prospects", <i>Reviews in Chemical Engineering</i> , 2018 Publication | <1% |
| 9 | Muhammad Aamir Bashir, Sarah Wu, Anilkumar Krosuri. "Rapid and Efficient Esterification of Oleic Acid by Continuous Liquid-phase Plasma Discharge", <i>Journal of Environmental Chemical Engineering</i> , 2020 Publication | <1% |
| 10 | Xiao-Rong Chen, Yi-Hsu Ju, Chung-Yuan Mou. "Direct Synthesis of Mesoporous Sulfated Silica-Zirconia Catalysts with High Catalytic Activity for Biodiesel via Esterification", <i>The Journal of Physical Chemistry C</i> , 2007 Publication | <1% |

Exclude quotes On

Exclude matches Off

Exclude bibliography On