



THE USE OF ADSORBENTS OF LAMPUNG NATURAL ZEOLITES/COAL-FLY ASH IN REDUCING FUEL CONSUMPTION AND EXHAUST GAS EMISSIONS OF A 4-STROKE MOTORCYCLE

Herry Wardono¹, Simparmin Br Ginting², Eko Aprilando Sinulingga¹

¹Mechanical Engineering Department, University of Lampung, 35145 Bandar Lampung, Indonesia

²Chemical Engineering Department, University of Lampung, 35145 Bandar Lampung, Indonesia

E-Mail: herryw22@gmail.com

ABSTRACT

Research in utilization of Lampung natural zeolite/coal-fly ash was performed to observe its effect on fuel consumption savings and the reduction of exhaust emissions on a 4-stroke petrol motorcycle. Percentage variations of zeolite/coal-fly ash were abbreviated by 0/100 (Z0-F100), 25/75 (Z25-F75), 50/50 (Z50-F50), 75/25 (Z75-F25), and 100/0 (Z100-F0) (wt.%). Tests of fuel consumption were conducted by stationary tests at engine speed of 1000, 3000, and 5000 rpm and road tests as far as 5 kms. Meanwhile, exhaust emissions tests were performed at engine speed of 3000 and 5000 rpm. Filter zeolite/coal-fly ash was put on the air filter, so before entering the combustion chamber, the combustion air firstly contacted with this filter. The test results showed that the best fuel consumption savings for stationary tests occurred in the use of filter Z25-F75 that is as big as 53.06%, and the best fuel consumption savings in road tests as long as 5 km at a constant speed of 60 kph also occurred in the use of filter Z25-F75 that is by 33.43%. In addition, the highest reduction of CO and HC concentration also occurred in the use of filter Z25-F75 that is by 38.47% and 30%, respectively.

Keywords: Zeolites • Fly ash • Adsorbent • Oxygen-rich combustion • Engines performance

INTRODUCTION

In decades, issues in air pollution and fossil fuel energy crisis due to increasing in production of motorcycle, car, and industrial engines is huge problem in global world (Rahimi et al. 2009). In Indonesia, the scarcity of fuel availability in gas stations sometimes occurred at several cities. Increasing in motorcycle and car production every year, caused an increase in fossil fuel consumption and later leads to increase in air pollution. This impact greatly contributes to the high amount of hazardous gases for health and greenhouse effects (Hassani and Hosseini, 2016). In addition, waste of coal-fly ash also provides negative impacts on the environment (accumulating air pollution and surrounding environment) (Wu et al. 2016). The largest production of fly ash are resulted from a coal-fired power plants. The use of fly ash as air filter in increase of engine motorcycle performance can alternatively solve a problem in the energy crisis and air-environmental pollution.

In previous research, Iyer and Stanmore (1999) proved that fly ash has a property to absorb water. Chunfeng et al. (2009) confirmed that fly ash containing ratio $\text{SiO}_2/\text{Al}_2\text{O}_3$ of < 5 is a similar content in natural zeolite. These properties are a reason that fly ash and zeolite can be used as an air filter. Wardono and Mario (2015) has proved the ability of coal-fly ash for saving fuel consumption and reducing exhaust gas emissions. Pellets made up from fly ash was very easy and cheap. Filter containing pellets was very easy to being mounted in a motorcycle, and required no modifications in the engine. Wardono et al. (2011) had proved the ability of the

zeolite pellets as air filter in saving of 31.03% fuel consumption, and reduced of 13.64% CO gas. Wardono and Mario (2015) reported that fly ash pellets were able to save a fuel consumption of up to 34.48% in stationary tests, and 22.38% in road tests, respectively. In addition, fly ash pellets also reduced CO emission gas by 15.81% and HC gas by 18.20%, respectively. An increase in motor cycle performance during stationary and road tests was attributed using natural zeolite as air filter because the zeolit has a property to adsorb nitrogen gas and water vapor.

As mentioned above, it proves that both Lampung natural zeolite and coal-fly ash are able to save a fuel consumption and reduce exhaust emissions gas. Zeolite has an ability to adsorb nitrogen gas and water vapor in air environment (US Patent No. 6544318, 2006, Bekkum et al. 1991), whereas coal-fly ash is able to adsorb moisture (Wang et al. 2003). Basically, natural air is composed of nitrogen, oxygen, other gases and water vapor. In the combustion process, the gas required is only oxygen. Meanwhile nitrogen gas and water vapor are not required in combustion process, so that they should be removed in the combustion air. Less content of nitrogen gas and water vapor in the combustion air, higher heat accepted by fuel at the end of the compression stroke. Therefore, the the experimental research is need to investigate the performance of a 4-stroke motor cycle engine using of air filter made up from pellets containing mixtures of natural zeolite/fly ash. The stationary and road tests of motorcycle performance data are compared to get the best composition of mixtures of zeolite/fly ash.



www.arpnjournals.com

MATERIALS AND METHODS

Materials

Raw materials used in this experiments to produce pellets were Lampung natural zeolite, coal-fly ash, mineral water, and tapioca. Natural zeolite is from Sidomulyo-South Lampung. Coal-fly ash is obtained from Steam Power Plant in Tarahan-South Lampung.

Pellet Preparation

After the tools and materials were prepared, zeolite, coal-fly ash, mineral water, and the tapioca flour were firstly weighed using a digital balance (unit in gram), respectively. Compositions of pellets were varied with zeolite/fly ash ratio of 0/100, 25/75, 50/50, 75/25, and 100/0 (wt.%). Furthermore, all raw materials were mixed and stirred until form a pasta, and cool in room temperature. Then pasta was inserted into pellet moulding and formed tablet with diameter of 10 mm and thickness of 3 mm. The pellets containing of zeolite/fly ash ratio of 0/100, 25/75, 50/50, 75/25, and 100/0 (wt.%) are abbreviated with Z0-F100, Z25-F75, Z50-F50, Z75-F25, and Z100-F0, respectively. Then pellets were heated in oven at 100 °C for 1 h for removing water content (Fig. 1a). In the next step, pellets were packaged using 3 variations of weight: 15 g (full filter), 11.15 g (medium filter), and 7.5 g (half filter) and neatly arranged using wire frame as filter (Fig. 1b). The air filter containing pellets was mounted in air filter casing of motorcycle (Fig. 2a).



(a)




(b)

Figure- 1. (a) Zeolite/coal-fly ash pellets and (b) the pellet filters.

Motorcycle Performance Tests

Experiments were started firstly by observing a fuel consumption on motorcycle under two conditions, namely stationary test and road test. Stationary tests were performed at idle engine condition. The first is preparation

by warming up the engine until the engine reach stable, and the second is setting up a engine rotation (rpm) at 1000, 3000, and 5000 rpm, respectively and then the engine was turned off. The testing was started by filling gasoline into artificial tank up to 240 ml and the engine was turned on again together with the stopwatch turning on. After 5 minutes, the engine and stopwatch was turned off. The remaining fuel in the tank was measured again for determining the amount of fuel consumption. The engine performance test was continued using air filters containing mixtures of zeolite/fly ash with a different weight for all ratio of zeolite/fly ash compositions. After that, tests were continued with variations in other engine rotations for 3000 and 5000 rpm. Furthermore, The engine tests was performed also using pellets with 11.25 g and 7.5 g. All results were recorded, and compared with the test results using with and without air filter of zeolite/fly ash pellets.

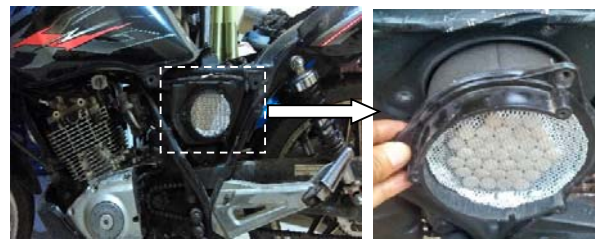

(a)



(b)

Figure-2. (a) Mounting of pellet filter on motorcycle and (b) gas analyzer.


After stationary tests, fuel consumption tests were performed for road tests. The experimental procedure performed was the same as stationary tests, the difference was the motorcycle goes as far as 5 km at an average speed of 60 kph. Testing began with no pellet filter, continued with filter Z0-F100, Z25-F75, Z50-F50, Z75-F25, and Z100-F0, with a variation of the mass of pellets 15 g, 11.25 g and 7.5 g. All the test results were recorded, then compared with the results of the test without using filter pellets.

From the test results of fuel consumption, it shows that the filter zeolite/fly ash with weight of 11.25 g provides the best fuel consumption savings. Thus, in the exhaust emission test, the weight of pellets used was 11.25 g for all variations of composition zeolite/fly ash. The test sequence was preceded by no pellet filter mounted on the engine, then followed by filter of Z0-F100, Z25-F75, Z50-F50, Z75-F25, and Z100-F0 with a variation of the engine




www.arpnjournals.com


rotation of 1500 and 3500 rpm. Emission test results needed in this research were the concentration of CO and HC gas produced by the combustion gases. The results of gas concentration CO and HC gas were recorded, then compared with test results without using filter of zeolite/fly ash pellets. For more details, installation of a filter of zeolite/fly ash pellets on a motorcycle, and the gas analyzer used can be seen in Figure 2b.

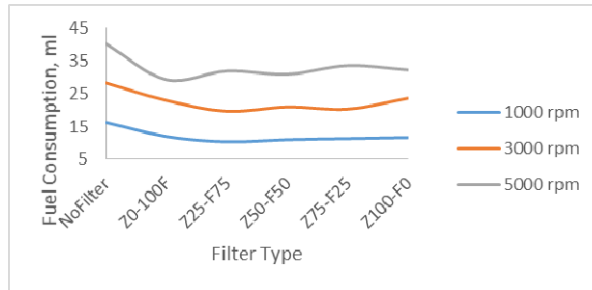

(a)

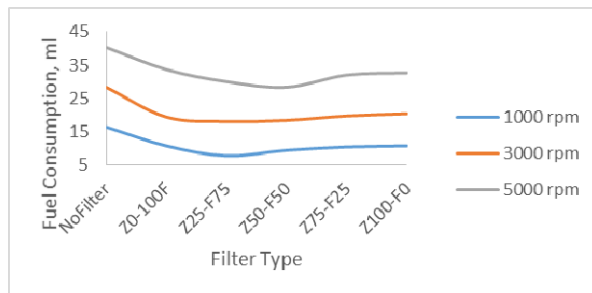

(b)

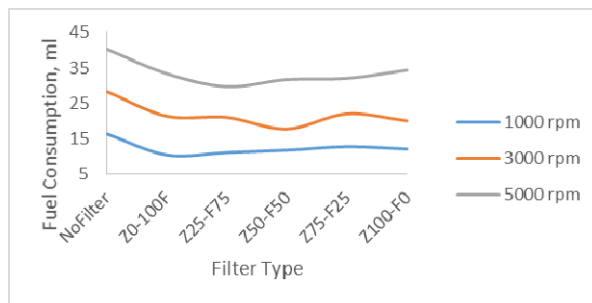

(c)

Figure- 3. Fuel consumption in stationary tests (a) 15 g, (b) 11.25 g, and (c) 7.5 g.

RESULTS AND DISCUSSIONS

Fuel Consumption at Stationary Tests

Figure 3 shows that the use of the entire filter/fly ash zeolite pellets are able to save fuel consumption of motorcycle, both the weight of pellets 15 g (Fig. 3a), 11.25 g (Fig.3b), and 7.5 g (Fig. 3c). The use of filters pellet weight of 15 g was able to save fuel consumption by 26.51% till 36.75% at 1000 rpm, 16.47% till 30.59% at 3000 rpm, and 16.53% till 27.27% at 5000 rpm, as shown in Fig. 3a-c). The best result was obtained in the use of 11.25 g pellet filter, which was able to save fuel

consumption of between 34.70% till 53.06% at 1000 rpm, 28.24% till 36.47% at 3000 rpm, and 16,53% till 29.75% at 5000 rpm.



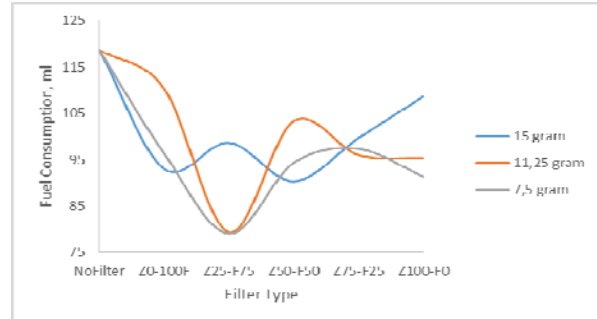


Figure- 4. Fuel consumption in road tests at 60 kph for 5 km.

While the use of 7.5 g pellet filter was able to save fuel consumption by between 22.45% till 36.74% at 1000 rpm, 22.35% till 37.65% at 3000 rpm, and 14.88% by 21,49% at 5000 rpm. From these results, the highest fuel savings in the use of filter weight of 11.25 g pellets occurred for use of Z25-F75 filter, that was 53.06%.

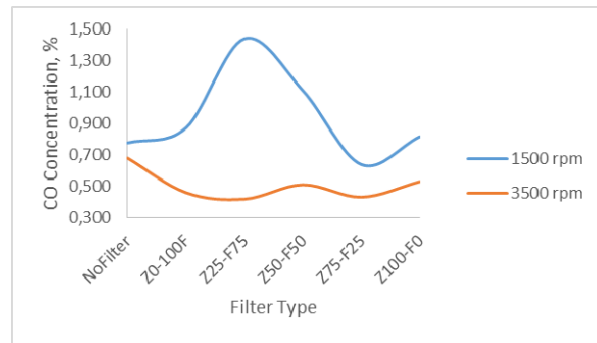

(a)

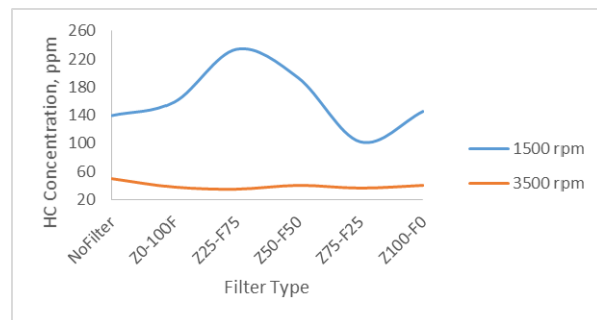

(b)

Figure-5. Emission gas concentration in exhaust gas (a) CO and (b) HC.

Similar results occurred in road tests. The fuel savings occurred were quite significant, as shown in Figure 4. In road test, the highest fuel savings also occurred in the use of the pellet filter of Z25-F75 with weight 7.5 g and 11.25 g, those were 33.43% and 33.15%, respectively. The fuel savings occurred at 8.43% till



www.arpnjournals.com

23.88% by weight of 15 g, and 7.02% till 33.15% at 11.25 g, and 17.98% till 33.43% with weight of 7.5 g.

Exhaust Gas Emissions at Stationary Tests

Slightly different from the results obtained in the test of fuel consumption, in exhaust emissions test, the exhaust emissions were able to be reduced at test of 3500 rpm, while at the engine rotation of 1500 rpm, it was the opposite result, as shown in Fig. 5a and Fig. 5b.

Reduction of exhaust emissions at high speed, 3500 rpm was obtained at between 22.10 till 38.47% for CO gas, and 19.0 till 30.0% for HC gas. The highest reduction of exhaust gas emissions occurred in the use of the pellet filter of Z25-F75, ie 38.47% till 30.0% for Gas of CO and HC, respectively.

CONCLUSION

Air filter made up from mixtures of Lampung natural zeolite with coal-fly ash was proven to be able to save a fuel consumption at the stationary tests and road tests. Exhaust gas emissions were only reduced at the engine rotation of 3500 rpm. The best performance of a-4 stroke motorcycle are obtained using air filter containing of pellet with composition of Z25-F75, and followed by air filter containing of pellet with composition of Z50-F50.

ACKNOWLEDGEMENT

Authors would like to thank the Ministry of Research, Technology and Higher Education, Republic of Indonesia for financially funding project via the Competitive Research Grant 2016 with the contract No. xxx/UN26/8/LPPM /2016.

REFERENCE

- Chunfeng, W., Jiansheng, L. and Xia, S. (2009). Evaluation of zeolites synthesized from fly ash as potential adsorbents for waste water containing heavy metals. *Journal of Environmental Sciences*, 21, pp.127-136.
- Hassani, A. and Hosseini, V. (2016). An assessment of gasoline motorcycle emissions performance and understanding their contribution to Tehran air pollution. *Transportation Research Part D: Transport and Environment*, 47, pp.1-12.
- Iyer, R.S. and Stanmore, B. (1999). The effect of water absorption and the role of fines on the yield stress of dense fly ash slurries. *Cement and Concrete Research*, 29(5), pp.765-767.
- Rahimi, H., Ghobadian, B., Yusaf, T., Najafi, G. and Khatamifar G. (2009). Diesterol: An environment-friendly IC engine fuel. *Renewable Energy*, 34, pp.335-342.

US Patent No. 6544318. (2006). High purity oxygen production by pressure swing adsorption. Air Products and Chemicals, Inc.

(<https://www.google.com/patents/US6544318>) (accessed on October 20, 2016).

Van Bekkum, H., Flanigen, E.M. and Jansen, J.C. (1991). *Introduction to Zeolite Science and Practice*. Elsevier Science Publishers B.V. Netherlands, p.

Wang, A., Zhang, C. and Sun, W. (2003). Fly ash effects: I. The morphological effect of fly ash. *Cement and Concrete Research*, 33(12), pp.2023-2029.

Wardono H. and Mario. (2015). Effect of Variations of Activator Normality on NaOH-Physic Activation of Coal-Fly Ash Adsorbent on a 4-Stroke Motorcycle Engine Performance. *Proceeding of National Conference Mechanical Engineering XIV*, October 7-8, Banjarmasin-Indonesia. (in bahasa).

Wardono, H., Ginting, S. and Supriadi, H. (2011). The use of Zeolit Pellets with Physic Activation on Fuel Consumption and Gas Emission of a 4-Stroke Motorcycle Engine. *Proceeding of Annual Engineering Conference of Engineering Faculty-Universitas Gadjahmada*, February 16, Yogyakarta-Indonesia. (in bahasa).

Wu S., Zhou, J., Pan, Y., Zhang, J., Zhang, L., Ohtsuka, N., Motegi, M., Yonemochi, S., Oh, K., Hosono, S. and Guangren Qian. (2016). Dioxin distribution characteristics and health risk assessment in different size particles of fly ash from MSWIs in China. *Waste Management*, 50, pp.113-120.