

Table of contents

Volume 1173

2021

◀ Previous issue Next issue ▶

The 6th International Conference of Science, Technology, and Interdisciplinary Research 2020 (IC-STAR 2020) 20th-21st October 2020, Bandar Lampung, Indonesia

Accepted papers received: 29 July 2021

Published online: 01 September 2021

Open all abstracts

Preface

OPEN ACCESS 011001

Preface

+ Open abstract  View article  PDF

OPEN ACCESS 011002

Peer review declaration

+ Open abstract  View article  PDF

Papers

OPEN ACCESS 012001

Characteristics of medium-low rank coal blending on performance and efficiency steam power plant

Hendri, R Nurhasanah and A F Lubis

+ Open abstract  View article  PDF

OPEN ACCESS 012002

Comparison of the winglet aerodynamic performance in unmanned aerial vehicle at low Reynolds number

S H S Putro, B J Pitoyo, N Pambudiyatno, Sutardi and W A Widodo

+ Open abstract  View article  PDF

OPEN ACCESS 012003

Structure from Motion (SfM) method to characterize fluvial sedimentology in Way

Semaka river in Lampung province, Indonesia

This site uses cookies. By continuing to use this site, you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



R C Wibowo, B S Mulyatno, O Dewanto and M Sarkowi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012004

Optimization, modelling and simulation to scale-up the production of rice bran extract and defatted rice bran

G Fitriyano, N H Fithriyah, R A Nugrahani, A B Syamsudin and M Kosasih

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012005

Optimization of shell and tube heat exchanger using the water cycle algorithm

M F I M Hanafi, A Bahreininejad and N Uddin

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012006

Classification of *Civet* and *Canephora* coffee using Support-Vector Machines (SVM) algorithm based on order-1 feature extraction

R Z H Suyoto, M Komarudin, G F Nama and T Yulianti

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012007

Geophysical approach for assessment of seawater intrusion in the coastal aquifer of Bandar Lampung, Indonesia

Rustadi, I G B Darmawan, N Haerudin, Suharno and A Setiawan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012008

Reservoir properties prediction using seismic inversion and geostatistical integration

O Dewanto, B S Mulyatno, P R Ordas and R C Wibowo

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012009

The effect analysis of wind speed variation to the horizontal axis wind turbine design with Q-blade

A S Samosir and A Riszal

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012010

Coal velocity and proximate analysis relationship using Multiple Linear Regression

S Erfani, F M S Siregar, A Zaenudin, Rustadi, I B S Yogi and R C Wibowo

[+ Open abstract](#) [View article](#) [PDF](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



-
- OPEN ACCESS** 012011
Investigation of conical draft tube of Kaplan turbine with spiral liner and without spiral liner using CFD simulation
Sirojuddin, I Ekayana, B C H Nugroho, H R Aziz, A Kholil and S Harahap
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012012
Spectrophotometric analysis of caffeine in local product of Arabica: observed at different roasted temperatures
Misto, K Alawiyah, L Rohman, Supriyadi, Mutmainnah and E Purwandari
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012013
Reservoir properties modelling using multi-attribute seismic analysis in south Sumatra basin, Indonesia
B S Mulyatno, F S Parameswari, N Hikmah, O Dewanto and R C Wibowo
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012014
Synthesis and characterization exopolysaccharide from algae *Spirulina* sp. using technique sol-gel as adsorbent Pb(II) ion
R A Kausar, Buhani, Suharso and A Setiawan
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012015
Investigation and modelling of the flood control system in the Aerotropolis of Yogyakarta International Airport
S Fadilah, Istiarto and D Legono
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012016
The effects of Ozonation and ultrasonic cavitation on batik wastewater treatment with coagulation-flocculation as pre-treatment
I N J Siahaan, A E Saputra and E F Karamah
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012017
The effect of Ozonation on the chemical structure of microplastics
A N Fitri, D Amelia and E F Karamah
[+ Open abstract](#) [View article](#) [PDF](#)

Batik wastewater treatment by the hydrodynamic cavitation and Ozonation with coagulation-flocculation pretreatment

A E Saputra, I N J Siahaan and E F Karamah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012019

Production of palm shell based activated carbon by two stage phosphoric acid impregnation and physical activation

Yuliusman and T M Afifah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012020

Influence of groundnut shell ash on compressive and tensile strengths of concrete

Samsunan, I Y Salena, Rosiana and Ruslaini

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012021

Hydrological modelling of Air Bengkulu river watershed in Indonesia using SUH and HEC-HMS models

G Gunawan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012022

Partial discharge type detection and identification based on its sources

R W Putra, H H Sinaga, N Purwasih, D Permata, Y Yuniati and H B H Sitorus

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012023

Performance comparison of single and double pass PV/T solar collectors integrated with rectangular plate fin absorber

Amrizal, Y P Hidayat and M Irsyad

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012024

Optimization of X-ray parameter monitor wireless system based on internet of things

A B Triani, S Budiyanto, A Adriansyah and M Alaydrus

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012025

Concentration profile and water level effect on the evaporation in the spent nuclear fuel storage pool using a diffusion approach

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012026

Study of the potential utilization of local Lampung Province resources in development of dental implant bioceramics

Y Hendronursito, I Sukmana and A Y E Risano

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012027

Effect of austempering temperatures on surface hardness of AISI 4140 steel

M Badaruddin, B Bakti, B Prasetyo and Sugiyanto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012028

Synthesis and characterization of hydroxyapatite bioceramics from shells of serai snail and mangrove crab in Tanjung Jabung beach: effect of milling process

R Utami, D Gustiono, M D Effendi, S Roseno, H D Fahyuan and M Z Nasri

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012029

The effect of preloaded on delamination of composite laminate subjected to low energy impact

A S A Sabli, M Morni, M Z H Ahmad, A H Noorhalidi and Y Aminanda

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012030

Determine the dynamic load acting on the chassis of multipurpose forest fire fighting vehicle

L V Van and N T Tung

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012031

Degradation on mechanical properties of virgin and recycled polylactic acid ageing in aqueous environment

S Budin, M H Koay and N C Maideen

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012032

Densification and mechanical behaviour of zirconia containing flyash as dopant

R Singh, S R Ya'akub, A D A Hamid, Z Ibrahim and M Y Ali

[+ Open abstract](#) [View article](#) [PDF](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



-
- OPEN ACCESS** 012033
Study of kinetic and thermal decomposition from municipal solid waste pellets using model-fitting methods
S R H Siregar, D Nursani, M I B Setyawan and A Surjosatyo
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012034
Growth inhibition of tropical fungi by silver nanoparticles incorporated polyurethane coating
K M Said, W M Z W Yunus, A Hidayah, K K Ong, A L N Shazwani, M S N N Shakira and A Nurnadia
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012035
Biodegradation of low-density polyethylene (LDPE) and starch – based plastic (SBP) by thermophiles *Bacillus subtilis* and *Candida tropicalis*
N Z Zahari, S N Abdullah, P M Tuah and F N Cleophas
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012036
Grafting the carboxyl groups onto DPNR by seeded emulsion polymerization to enhance the compatibility with silica filler
J Woowong, P Phinyocheep and J Sakdapipanich
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012037
Prototype of automatic conveyor system using programmable logic controller for educational purpose
T W O Putri and M I Mowaviq
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012038
iAMR: intelligent auto-dispenser mosquito repellent system
W A W A Bakar, M Man, L C Hwa and L Y Wang
[+ Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012039
Physical, mechanical and corrosion properties of Zn-15Al alloy coating deposited at different voltage using thermal spray process
L Yu-Song, T A A Bakar, H Ghandvar, N A Fadil and N Suhaili
[+ Open abstract](#) [View article](#) [PDF](#)

Reduced-order modelling of unsteady vortex lattice method

P Bundith, P Pimanprom, W Janthornsirijan, C Punkun, S Slesongsom and S Bureerat

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012041

Effect of 3D-printing parameters on the tensile strength of acrylonitrile butadiene styrene (ABS) polymer

S R Ya'akub, N Ibrahim and R Singh

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012042

The application of Tukey's mean difference (Tukey's HSD) for identification of local genetic sources of corn in selecting prospective parental lines

S Hikam, P B Timotiwu, D Sudrajat and S Alvianti

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012043

Microbial chitosan for the fabrication of piezoelectric thin film

A T Hazmi, F B Ahmad, M H Maziaty Akmal and A A M Ralib

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012044

Solar Photovoltaic Power Generation for Distillation Process

M I Mowaviq, A Junaidi, T W O Putri and D Rosanda

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012045

Aerodynamic drag reduction on the application of suction flow control on vehicle model with varied upstream velocity

R Tarakka, N Salam, Jalaluddin, W Rauf and M Ihsan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012046

Flow drags across three minibus car models arranged in tandem in four configurations

N Salam, R Tarakka, Jalaluddin, M Ihsan and M A Jimran

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012047

Oils and water absorption behavior of Biduri (*Calotropis gigantea*) fibers

A Sukmawati and W Septiani

[+ Open abstract](#) [View article](#) [PDF](#)

This site uses cookies. By continuing to use this site, you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



-
- OPEN ACCESS** 012048
Indonesian glider GL-1 spoiler preliminary design and computational fluid dynamics analysis using EASA CS-22 performance requirements
T Mulyanto and M F Zulkarnain
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012049
Preliminary design of bionic flapping wing vehicle
M A Moelyadi, E Amalia, A D Tanoto, L M Septiani, M Rafie, A S Perdana and R Agung
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012050
Maneuverability analysis on flying vehicle with thrust vectoring system
V H Al Aviev and R A Sasongko
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012051
Dynamic response analysis of aircraft with actuation system failure: open-loop and closed-loop cases
M F D Syamsul and R A Sasongko
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012052
Distributed robust adaptive output-feedback synchronization
M R Rosa and E Susanto
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012053
Stochastic modeling of aircraft flight parameters in terminal control area based on automatic dependent surveillance-broadcast (ADS-B) data
R Medianto, J Jusuf, R Oktafianto, R Atiqah, J Sembiring, H M Pasaribu, Y I Jenie and H Muhammad
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012054
Dynamic obstacle avoidance system for the unmanned aerial vehicle (UAV)
S S Rawikara and R A Sasongko
[+](#) [Open abstract](#) [View article](#) [PDF](#)
-
- OPEN ACCESS** 012055
High altitude long endurance of unmanned aerial vehicle (UAV) ITB solar panel conceptual design
This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, [click here](#)
M A Moelyadi, M A Soltan, M F Zulkarnain, M F Akbar and B K Assakandari



[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012056

Take off simulation and analysis of aircraft with twin floats

H A Jakaria and T Indriyanto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012057

Missile threat assessment system using Naive Bayes classifier approach

W Dewangga and R A Sasongko

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012058

Sensitivity study and structural optimization of an aircraft wing in the maximum-stress and flutter constraints

M Kusni, M Widiramdhani and B K Hadi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012059

Developing a non-routine maintenance load forecasting procedure in maintenance, repair and overhaul (MRO) XYZ company: A case study of B737NG aircraft

D Graciova and E Suwondo

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012060

V-Tail flutter analysis of wing-in-surface-effect (WISE) aircraft using a structural analysis software

M Kusni, A Taufiqurrahman and L Gunawan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012061

Corrosion of Carbon Steel and alloy Steel: effect of humidity and hydrochloric acid

Abdulkader A. Muhammad, Thamir A. D. M. S. Almula and Dyhia A. Sultan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012062

Essential characterization of metal powder for additive manufacturing

S M Q M Ramli, N A Fadzil, H Ghazali, P Viklund and W F F W Ali

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.

012063



Micro-electro discharge machining (Micro-EDM) models for conductive and nonconductive materials: A review

M Y Ali, A Sabur, S R Ya'akub, A D A Hamid, A R Alao and R Singh

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012064

Modelling and design of flight control for quadcopter in ballistic airdrop mission under wind perturbation

C Liuswanto and Y I Jenie

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012065

Using FC-CLAHE-ADF to enhance digital mammograms for detecting breast lesions

S H Suradi and K A Abdullah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012066

Numerical simulation on the permeability of non-crimp Carbon fiber epoxy using out-of-autoclave manufacturing method

A Levino, B K Hadi and A Kuswoyo

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012067

Flexural behaviour of jute, glass, and Carbon fibre reinforced Polyester hybrid composites

A Murdani and U S Amrullah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012068

Comparison analysis of abaca fiber/polyester and abaca-e-glass/polyester hybrid composites to impact strength and its application to ballistic

L Banowati, P Sari and B K Hadi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012069

Design, development and testing of Universiti Malaysia Sabah (UMS) eco-solar dryer

B C Lim, A M Wash, S S Arifin, N S Kassim, A S T Tan, A Abdullah, W A A Zal and J Janaun

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012070

Inorganic flame retardants' efficacy of Aluminum Hydroxide, Magnesium Hydroxide in the combustion rate of intermediate Calamagrostis from Ecuador Moorlands

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



M Córdova-Suárez, E M Barreno-Avila, D S Pozo-Álvarez and J C Córdova-Suárez

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012071

Fusion deposition modeling (FDM) 3D printing parameters correlation: An analysis of different polymers surface roughness

A F Barreno-Avila, M Monar-Naranjo and E M Barreno-Avila

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012072

Influence of Textured Nickel/Palladium/Gold-Silver (Ni/Pd/Au-Ag) Layer on Pre-plated Leadframe for Automotive Applications

A Suhaimi, G Omar and M T Asmah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012073

Short review on heteropoly acid based catalyst for valorization of biomass waste into valuable chemicals

N L Z Z Adil, T S T Saharuddin, L N Ozair and F W Harun

[+ Open abstract](#) [View article](#) [PDF](#)

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our [Privacy and Cookies policy](#).





This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



PAPER • OPEN ACCESS

Study of the potential utilization of local Lampung Province resources in development of dental implant bioceramics

To cite this article: Y Hendronursito *et al* 2021 *IOP Conf. Ser.: Mater. Sci. Eng.* **1173** 012026

View the [article online](#) for updates and enhancements.

You may also like

- [Mechanical evaluation of test configuration and dental implant geometry](#)
L Pazos and E Perez
- [Materials and applications of bioresorbable electronics](#)
Xian Huang
- [The dosimetric impact of dental implants on head-and-neck volumetric modulated arc therapy](#)
Mu-Han Lin, Jinsheng Li, Robert A Price et al.



The Electrochemical Society
Advancing solid state & electrochemical science & technology

241st ECS Meeting

May 29 – June 2, 2022 Vancouver • BC • Canada

Abstract submission deadline: Dec 3, 2021

Connect. Engage. Champion. Empower. Accelerate.
We move science forward



Submit your abstract



Study of the potential utilization of local Lampung Province resources in development of dental implant bioceramics

Y Hendronursito^{1,2}, I Sukmana^{2,*}, A Y E Risano²

¹ Research Unit of Mineral Processing – Indonesian Institute of Sciences
Jl. Ir. Sutami Km. 15 Tanjung Bintang, Lampung Selatan, Indonesia – 35361

² Mechanical Engineering Department, Engineering Faculty, University of Lampung
Jl. Prof. Soemantri Brojonegoro No.1 Bandar Lampung 35143 Telp/Fax. 0721-704947

* E-mail: irza.sukmana@eng.unila.ac.id

Abstract. The increasing of dental implants needs to be supported by local materials' development as a form of independence for a nation. With its rich natural resources, Indonesia has the potential to be used as a dental implant material. Dental implant materials can be in bioceramic materials consisting of bioactive, bioresorbable, and bioinert. One of the bioactive materials of concern today is glass-ceramics from basalt rock. Meanwhile, the hydroxyapatite material sourced from limestone is the most widely used bioresorbable type. These materials, basalt, and limestone are very much found in Indonesia, including Lampung Province. However, the use of these two materials as bioceramic materials is still very little. Several methods of treating basalt as glass-ceramics and limestone as Hydroxyapatite are described in this article review. The utilization of local potential as a source of dental implant material will provide support for the independence of a nation in the welfare of its people.

Keywords: bioceramics, basal rock, glass-ceramics, dental implant

1. Introduction

The need for dental implants to replace missing teeth and improve tooth structure to support craniofacial reconstruction and orthodontic treatment is increasing. Three main types of synthetic biomaterials for dental implants are ceramics and carbon, metals and alloys, and polymer [1]. Metal and alloy materials are the primary choices because of their high strength. However, in its use, artificial bone made of metal needs careful attention. Corrosion, biofilm development, and hypersensitivity reactions are the most significant risk factor for metallic materials. However, titanium and its alloys are still widely used in osseointegration dental implants. There are still many confirmed cases of titanium hypersensitivity reactions [2].

Therefore, nowadays, medical devices made of metal have switched to ceramic or polymer materials because of the many innovations and excellent biocompatibility of these materials [3]. Bioceramics has been a lot conducted research and clinical professionalism of teeth with new and exciting substances for more than two decades. Various bioceramic formulations have been understood because of the chemical similarity to human bone. Bioceramics are often used as coating materials to improve the



biocompatibility of metal implants. Serve as a resorbable lattice to rebuild the replaced tissue. Bioceramics have good thermal and chemical stability, wear-resistance, and high strength [4].

Bioceramics are non-toxic and durable materials. It can interact with the surrounding tissue, are biodegradable, dissolve, or resorbable. Sugar and protein can bind with ceramics. For example, Blood vessels can penetrate some ceramic prosthetics and bone materials, eventually replacing them. Bioceramics is a unique biomedical material.

1.1. History of bioceramics development

The first bioceramics research was carried out, namely the "Paris" plaster ($\text{CaSO}_4, \text{H}_2\text{O}$). This plaster was first used to repair bone damage in 1892, which Dressman published. Furthermore, in 1920 the use of tricalcium phosphate was successfully used. The development of bioceramic materials began in the 1960s with Hulbert's work. It continued to be developed until the 1970s and 1980s [5]. In 1977 a study was carried out regarding the very low coefficient of friction between zirconia and alumina. History shows that 400 thousand hip joint femoral heads made of zirconia have been used from 1985 to 2001. The use of bioceramic materials in dental implants is classified as shown in Figure 1 [6].

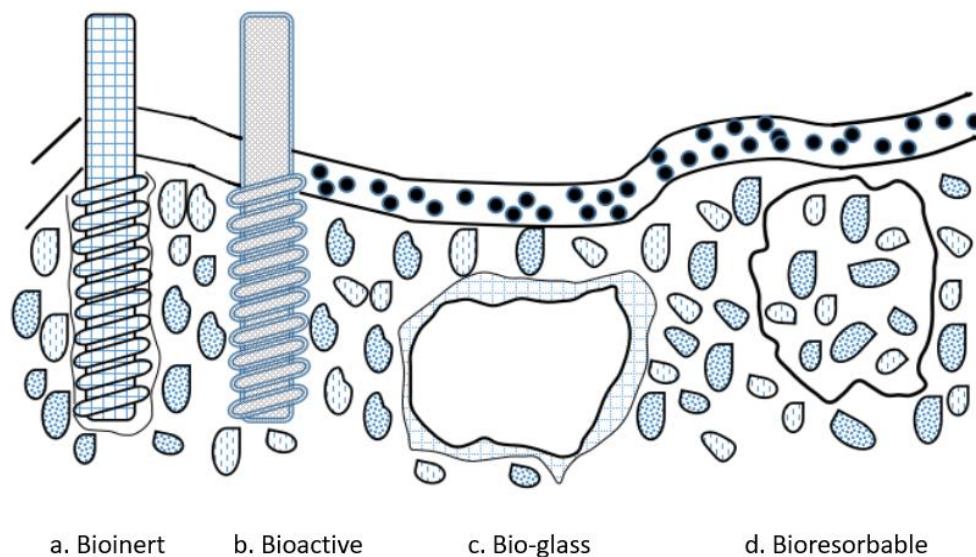


Figure 1. Classification of bioceramics according to their bioactivity [6]

There are four types of body response to the implanted matter, which allow the attachment of the material to the muscles: (a). bioinert (alumina dental implant); (b). bioactive (hydroxyapatite); (c). surface-active (bioglass); and (d). bioresorbable (tri-calcium phosphate/ $\text{Ca}_3(\text{PO}_4)_2$). The main groups of bioceramics are divided according to the tissue reaction to the implant surface. Bioactive materials include bioglass and glass ceramics. Bioresorbable materials such as calcium phosphate and hydroxyapatite (HAp). Bioinert include alumina, zirconia, and carbon.

Bioinert has a high level of stability in vivo, high mechanical properties, and when implanted in living bone tissue, the material fuses according to the osteogenetic contact pattern. Bioactive ceramic is osteoconduction and can bind chemically with living bone. In general, the mechanical strength of bioactive ceramics is lower than that of bioinert ceramics [7]. Meanwhile, bioresorbable is a ceramic material that can degrade when it is replaced by regenerating tissue [8].

Several types of bioactive and glass-ceramics have been developed. Glass-ceramics with different functions, such as superior mechanical properties and quick setting capabilities. Glass which is the most widely used research in the implant field, is mainly based on silica (SiO_2) which may contain several other critical phases. The use of silicate ceramics ($\text{SiO}_2 - \text{Na}_2\text{O} - \text{CaO}$) with a silica content of 65% or

more. Bioglass 45S5 with a composition of 45% SiO₂, 24.5% CaO, 24.5% NaO has been used since 1971 but is brittle and brittle. The addition of 6% P₂O₅ provides a high strength increase.

Produced glass-ceramics named AW glass-ceramics were reported. These glass-ceramics were containing oxy-fluor-apatite Ca₁₀(PO₄)₆ (OH, F₂) and wollastonite (CaO.SiO₂) in a MgO-CaO-SiO₂ glass matrix [9]. These glass ceramics spontaneously bind to living bones without the formation of surrounding fibrous tissue. The development of machine-capable bioactive glass with appetite and phlogopite phases has been carried out. Used clinically as a vertebra makean [6].

1.2. Basalt as Glass-Ceramics Material

In the early 1980s, glass-ceramics from basalt rock were developed. The method of forming glass-ceramics from basalt rock was patented since 1977. It is described as making glass-ceramic from basalt rock melted and enriched with CaO, MgO, and SiO₂ to reach a specific ratio. The melted basalt is then cooled and thermally forms rigid glass-ceramics crystals. Other studies studying the effects of basalt on the bodies of living things have also been reviewed. They experimented on the development of asbestos and basalts fiber on mice for six months [10]. In the case of using asbestos fiber in mice, one-third of the mice died, and at a dose of 2.7 g/kg of asbestos, all mice died. In the case of basalt fiber, all mice survived at doses up to 10 g/kg. Likewise, the experiment explained in his investigation that basalt showed a reaction that was not harmful to the human body [11].

Local basalt material from Mount Kopaonik as a glass-ceramic material was done. The phenomenon of glass crystallization formation was studied using X-ray (X-RD) phase analysis, optical microscopy, and several other techniques. In this study, heat treatment experiments were carried out and their influence in controlling the microstructure and properties of the product. The heat treatment used is by melting the basalt rock in a ladle over a temperature range of 1,250 - 1,300 °C. Crystallization by reheating at 950, 1,000, and 1,050 °C for 3 to 8 hours. The results of the phase formation observations obtained Diopside CaMg (SiO₃)₂ and Hypersthene ((Mg, Fe.) SiO₃) as crystalline phases. The size of the crystals formed ranged from 8 to 480 μm. Microhardness from 6.5 to 7.5, compressive strength between 2,000 - 6,300 kg/cm² and wear resistance between 0.1 to 0.2 g/cm² [12].

Due to its tough nature and good biocompatibility, glass ceramics from basalt rock are being developed. In its use, it is often made in powder form and used as a coating or as a reinforcing filler in bioceramic composites. Glass-ceramic made from basalt rock with heat treatment in various temperatures of 800, 900, and 1,000 °C for 60, 120, 180, and 240 minutes [13]. Glass-ceramics is used as a coating material for AISI 1040 using the plasma spray technique. The use of the plasma spray method aims to form crystalline oxide-based ceramics suitable for glass formation. The formation of amorphous glass structures is required to make glass-ceramic before crystallization heat treatment. From the DSC test, it is known that the glass transition temperature (T_g) is in an endothermic condition of around 804 °C and two exothermic peaks at 841 °C and 880 °C indicate crystal formation. The appearance of two crystallization peaks on the DSC curve implies that are two different crystal phases were formed during the heat treatment. From the XRD test, it was found that the heat treatment was 800, 900, and 1,000 °C for 2 hours to form a crystalline phase of augite [(CaFeMg) -SiO₃], aluminian-diopside [Ca(Mg,Al) (Si,Al)₂O₆], and diopside [Ca(Mg_{0.15}Fe_{0.85}) (SiO₃)₂]. This diopside-augite phase provides superior wear resistance and chemical resistance. The presence of Fe oxidation explained the glass-ceramics made of basalt rocks do not require a nucleant agent. Fe oxidized to Fe₃O₄, which acts as a nucleating agent and a site for crystal growth. The X-Ray Defragment analysis showed that the higher the crystallization temperature caused, the higher the diopside-augite peak. The heat treatment temperature leads to the formation of a large number of crystal phases in the glass.

The use of glass-ceramic basalt as a reinforcing filler in HAp composites against the possible dangers of use in the human body has been carried out in several studies on the safety and resistance of the body to implanted artificial materials. Even the use of basalt in the medical world has been widely used as a traded material. Service-disabled veteran-owned small business (SDVOSB) produces advanced materials. One of which is basalt. States that basalt products do not cause toxic reactions to water or air are not flammable and explosive. When in contact with chemicals, basalt does not produce chemical

reactions that can damage health and the environment [14]. The physical and chemical stability of powdered basalt (BS) to the biological environment is complete. In this research, composites from HAp powder add 5 and 10% wt of basalt to HAp are safe. The powder is then stirred and pressed, and then the sintering process is carried out. The selected sintering temperatures are 700, 900, and 1,200 °C.

The biological liquid environment was 0.9% NaCl solution at pH 6.7; Ringer's solution (NaCl; and KCl; and CaCl₂); Ringer – Locke's solution (NaCl; NaHCO₃CaCl₂; KCl; and glucose). By increasing the BS content by up to 10% and the anneal temperature to 900 °C, the X-phase lines which are part of the BS become clearer. The interaction of the HAp composite system with 5 and 10% BS was almost the same. It has been shown that the HAp + 10% BS at sinter temperature 900 °C composite system is a promising material for reconstructive surgery, given its strength properties. The hardness of 0.86 GPa Hv; modulus of elasticity 23.7 GPa, close to natural bone properties. From these studies, that BS is safe for the living environment of organisms [15]. The research about physical and mechanical tests of basalt powder reinforced HAp composites showed that the addition of 5% and 10% basalt powder as a filler increased the physical and mechanical properties of HAp products. At low temperatures, the β-TCP phase is formed. The β-TCP phase builder is considered to be more biocompatible than the α-TCP phase. The possibility of adjusting the HAP - β-TCP ratio is very promising for producing materials with bio-resorbing properties. The highest compressive strength that the HAp-BS composite can accept was obtained from the addition of 5% basalt to HAp, while 10% basalt strength decreased [16]. The manufacture and development of glass-ceramic materials from raw materials can improve mechanical and physical properties. Besides, this method is a significant segment of the story of the modern world [15,16].

1.3. Hydroxiapatite (HAp)

This time, significant progress has been made in the use of dental implants to replace missing teeth and damage. Calcium phosphate-associated hydroxyapatite (HAp) is the primary inorganic material in human teeth. The natural components of teeth have a comparable chemical composition and HAp properties. HAp has the potential to be used for many dental applications due to its high biocompatibility.

Hydroxyapatite (HAp) with the chemical formula Ca₁₀(PO₄)₆(OH)₂ is a mineral that occurs naturally in the inorganic components of human bones and teeth [17]. The constituent elements of HAp are mainly calcium and phosphorus, with the stoichiometric ratio of calcium to phosphorus is 1.667. In the synthesis of HAp, a sufficiently high source of calcium is required. Several materials can be used to make HAp, such as beef bone [18], eggshell [19], shells [20], limestone [21], and others. Of the several main ingredients, limestone is the largest source of calcium. Limestone is an inorganic mineral with calcium as the main constituent. The calcium carbonate (CaCO₃) content in limestone is around 95%. Calcium is obtained by purifying calcium carbonate. Therefore, limestone has many direct applications in various applications such as clinical, medical, biomaterial development and is suitable as a material in the manufacture of HAp. The structure of HAp consists of calcium, phosphorus, and hydroxyl ions Ca₁₀(PO₄)₆(OH)₂. It's often used as a substitute for bone mineral and dental tissue because of the chemical content that it has in common so that HAp can bind chemically with human bones and teeth [22]. About 65% of the mineral fraction in human bones consists of hydroxyapatite. HAp has been widely used to repair, fill, augment, and reconstruct damaged bone and tooth tissue as well as soft tissue [23].

Pure HAP cannot be used as an implant in load-bearing applications because of its highly brittle nature. Metal implants must also be coated to obtain biocompatibility properties with the local tissue environment. Therefore, coating metal surfaces with biocompatible materials such as HAp in dentistry is very promising. Many studies are carried out about the HAP coating of substantially load-bearing implants. A screw implant used in the maxillary anterior and posterior mandibula with a depth of more than 10 mm is recommended with HAp resurfacing. HAp coating is also recommended for the less dense cortical layer and spongiosis. HAp-coated cylindrical implants are recommended in the posterior maxilla or where the cortical layer is skinny with low density [24]. HAP coating on metal surfaces offers advantages in mechanical properties; it does not affect the load-bearing capacity due to the low density

and the biocompatible texture. CP titanium and HAP-coated titanium have observed that the HAP-coated system develops five to eight times [25].

1.4. Hydroxyapatite (HAp) Based Limestone

Hydroxyapatite can be synthesized in various ways, including the wet method and dry method. There are three types of wet methods, namely the method of precipitation, hydrothermal, and hydrolysis. The damp method is commonly used for HAp synthesis because it is economical and straightforward. Also, the HAp crystals formed are easily regulated in composition and physical properties.

Another advantage, the byproduct of its synthesis is water, so the possibility of contamination during processing is very low [26]. Experiments on the manufacture of HAp from limestone in Lampung Province have been started in the last few years. The experiment with making HAp from the limestone of Mount Branti using a mechanochemical method done by smoothing limestone in a ball mill machine with various grinding time and sintering process at 600 °C for 2 hours for all samples.

The following procedure is mixing 5 grams of limestone powder after sintering with 5.34 grams of Na_2HPO_4 , plus 10 ml of ethanol and stirring on a ball mill machine. In the last process, the sample is dried using an oven at 80 °C for 17 hours. Furthermore, the samples were tested for XRD, FTIR, and whiteness. The test results show that the highest degree of the white color is obtained from Mount Branti limestone, namely 85.7%, and the hardness obtained is 13.60 HV [27].

The effect of temperature and sintering time of limestone from Bandar Lampung on HAp characterization has also been studied. The highest temperature and the longest sintering time make the hardness of HAp increased. Xrd diffraction shows the same pattern as commercial HAp. However, the Ca / P ratio is still greater than 1.67 [28]. As an implant material, HAp has weak mechanical properties. Due to its low mechanical properties but bioresorbable properties, HAp is often used as a coating. For example, porous tantalum coating using HAp through the plasma spray method [29].

To obtain superior mechanical properties, HAp is usually combined with other materials to form a composite. The addition of 20% of silica increase the hardness of HAp 2 times compared to without the addition of silica [30]. HAp and polymer are combined to obtain a scaffolding product. The pectin extracted from the leaves of green grass jelly (*Premna oblongifolia* Merr) and hydroxyapatite (HA) as a scaffolding. The 3% Hap mixture with pectin was prepared.

The resulting scaffold had pore sizes ranging from 8.25 to 115 μm while the resistant to loads of 0.03 to 0.15 MPa. The porosity of the scaffold made is 15.33 to 40.97%, while the density is 0.69 to 1.02 g/cm^3 [31]. The use of HAp made from branti limestone in HAp - PLA composites also have been done. The production of HAp begins with an extraction process which is then continued with the hydroxyapatite synthesis stage at a temperature of 1,000 °C. The method of makes composites with the addition of PLA during the heating process. The results show the Ca / P ratio is 1.63, still below 1.67, which indicates that this process is still less than perfect [32].

2. The Potential Limestone and Basalt from Lampung Province

Limestone as the primary material for making HAp is often finding in Lampung Province. This limestone is mainly located on limestone hills which are mined by the community and industry. In the West Lampung area (Lemong District), there are hypothetical limestone resources of 20 million tonnes [33].

Tanggamus Regency is scattered in the Batu Mountain Block area with 45 million tonnes of limestone reserves. In Hilian Baji Block inferred 151 million tons, Cempaka Block 18 million tons [34], Pesawaran District, Tegineneng, and Teluk Pandan [35]. South Lampung district in the Gunung Branti area [32], Natar and others. Bandar Lampung district in the Bukit Sukamenanti area [36].

Complete data on basalt reserves in Indonesia are not yet available, only in several areas that have been researched. There are at least 12,036 million tons of basalt rock spread across Sumatra Island (1,310 million tons), Java (546 million tons), Kalimantan Island (4,138 million tons), Sulawesi (6,042 million tons) [37].

On the island of Sumatra, basalt which is a volcanic product, is often found in the Sipongi area (Mandailing Natal, North Sumatra), Silungkang (Sawahlunto, West Sumatra) [38]. According to the geological agency of the Ministry of Energy and Mineral Resources, basalt can be found in East Lampung, in the areas of district Sukadana, Mataram Baru, Bumi Agung, Marga Tiga, Jabung, and Labuhan Maringgai. Basalt resources in Lampung Province are estimated at more than 18 million tons. In the Sukadana district, basalt in the form of a lava flow, solid dark gray-black, the top contains many gas holes, locally has xenolith in the form of gas perforated basalt (vesicular), undergoes weathering, peels onions [39].

It is necessary to develop research from basalt and limestone as a material for glass-ceramics and Hydroxyapatite. The potential local utilization as a source of dental implant material will provide support for the independence of a nation in the welfare of its community.

3. Conclusions

Lampung Province has potential natural resources that can be used as dental implant materials. The bioceramic materials most commonly used as dental implant materials are glass-ceramics and hydroxyapatite (HAp). glass-ceramic material. Basalt stone is a material that can be used as a glass-ceramics material. The basalt rock in Lampung Province is found in the Sukadana area and several other places. The potential of natural resources originating from basalt rock needs attention because its current use is only used as building stone. In contrast, the rock has tremendous benefits in the field of dental implants. Limestone has been mined by many companies and local communities in Lampung. Several companies use this limestone as an ingredient in cement and agricultural lime. The use of limestone as a HAp material is still very limited in research. And until now, the investigation has not reached maximum results.

Acknowledgement

This study is supported by BLU Universitas Lampung under the scheme of Penelitian Terapan 2021. YH is supported (in some part of this study) by the internal grant of LIPI Tanjung Bintang Lampung, Research Unit Mineral Processing.

References

- [1] Meffert R M, Langer B, Fritz M E 1992 *Journal of periodontology*. **63** 859-870.
- [2] Přikrylová J, Procházková J, Podzimek Š 2019 *BioMed research international*. 2519205
- [3] Fitriani C Y, Wibawa A 2019 *Insisiva Dent. J.: Majalah Kedokteran Gigi Insisiva*. **8** 53-58.
- [4] Jayaswal G P, Dange S P, Khalikar A N 2010 *The J. of Indian Prosthodontic Soc.* **10** 8-12.
- [5] Hench L L 1991 *J. of the american cer. Soc.* **74** 1487-1510.
- [6] Heness G, Ben-Nissan B 2004 *Materials forum* **27** 104 114
- [7] Yamamuro T 1990 *Handbook of Bioactive Ceramics* (Florida: CRC Press Boca Ranton)
- [8] Patel N, Piyush G A 2012 *Int. J. Emerging Tech. Adv. Eng.* **2** 2250-2459.
- [9] Kokubo T, Soga W, Kato A 1991 *J. Ceramic. Soc.* 1991 **21** 500-518
- [10] Kogan F, Nikitina O 1994 *Perspect.* **102** 205–206.
- [11] McConnell E, Kamstrup O, Musselman R, Hesterberg T, Chevalier J, Miller W, Thevenas P 1994 *Toxicol* **6** 571–614.
- [12] Matovic B, Boskovic S, Logar M 2003 *J. Srb.Chem.Soc* **68** 505–510.
- [13] Yilmaz S, Bayrak G, Sen S, Sen 2006 *Materials* **27** 1092–1096.
- [14] Sdvosb <https://www.reade.com/products/trap-rock-basalt-powder-fiber>
- [15] Boshytska N V, Fedorenko Y O, Rekos A O, Kaplunenko N V 2017 *Powder Metall. Met. Ceram.* **55**, 574–579.
- [16] Kaplunenko N V, Ulyanchych N V and Klipov V D 2016 *Powder Metallurgy and Metal Ceramics*

- 55** 306-311.
- [17] Kehoe S 2008 *Optimization Of Hydroxyapatite (Hap) For Orthopedic Application Via The Chemical Precipitation Technique* (Dublin City University).
- [18] Warastuti Y, Budianto E, Darmawan 2014 *J. Sains Mater. Indonesia*. **16**, 83–90.
- [19] Mozartha M, Praziandithe M, Sulistiawati 2015 *B-Dent* **2** 75–81.
- [20] Khoirudin M 2015 Sintesis dan Karakterisasi Hidroksiapatit (HAp) dari Kulit Kerang Darah (Anadara Granosa) dengan Proses Hidrotermal *PhD Thesis*.
- [21] Margareta M A H, Fuad A, Ilmiawati S A, Wonorahardjo S 2015 *J. Penelit. Fis. Dan Apl.* **5** 15-20.
- [22] Arboleda A, Franco M, Caicedo J, Goyes C 2016 *Ing. Y Compet.* **78** 71–78.
- [23] Sirait M, Sinulingga K, Siregar N, Siregar RSD 2020 *Journal Of Physics: Conference Series*. 012058.
- [24] Ong J L, and Chan D C 2000 *Critical Reviews™ in Biomedical Engineering* **28** (5&6).
- [25] Nasar A 2019 *Applications of Nanocomposite Materials in Dentistry* 145-160.
- [26] Yenti S R 2016 Sintesis Hidroksiapatit dari Limbah Tulang Sapi menggunakan Metode Presipitasi dengan Variasi Rasio Ca/P dan Konsentrasi H₃PO₄ *Doctoral dissertation*.
- [27] Priyanto A 2018 Pengaruh Sumber Batu Kapur Terhadap Kualitas Produk Hidroksiapatite Dengan Media Ethanol *Skripsi*.
- [28] Sukmana I, Hendriyanto A, Savetlana S and Tarkono 2018 *AIP Conference Proceedings* **1977** 030039
- [29] Safuan N, Sukmana I, Kadir M R A and Noviana D 2014 *Journal of Physics: Conference Series* **495** 012023
- [30] Afriani F, Evi J and Tiandho Y 2020 *Journal of Engineering and Scientific Research* **2** 85-89.
- [31] Habibie S, Tristiyanti Y, Gustiono D, Harahap M E, Chalid S Y and Effendi D 2019 *J.of Eng. & Sci. R* **1** 12-16
- [32] Asmoro A D Pengaruh Ukuran Serbuk Hydroxiapatite Berbahan Batu Kapur Lampung Terhadap Kekerasan Komposit Hydroxiapatite/Polylatic Acid Sebagai Pengisi Tulang (Bone Filler) *Thesis*.
- [33] Sukmawardany R S, Latif N A, Sutisna T, Endang R I and Logam S D M N 2016 *Inventarisasi dan Evaluasi Sumber Daya Mineral Di Daerah Kabupaten Lampung Barat dan Tanggamus - Provinsi Lampung* (ESDM Lampung).
- [34] Zulfikar, Corry K, Martua R and Reza M D 2017 Eksplorasi Umum Batugamping di Kecamatan Pugung, Kabupaten Tanggamus, Provinsi Lampung (Bandung: Pusat Sumber Daya Mineral BatuBara dan Panas Bumi).
- [35] bpesawaran 2018 <http://potensi.pesawarankab.go.id>.
- [36] Naqiyya T 2019 Kajian Alih Fungsi Lahan Ruang Terbuka Hijau (RTH) Bukit Sukamenanti *Thesis*
- [37] Isnugroho K, Hendronursito Y, Candra B D 2018 *Materials Science And Engineering* (Indonesia: IOP Conf. Series).
- [38] Zulkarnain 2001 *J. Teknologi Minerals* **8** 37–52.
- [39] Kusdarto S, Sukmawan S, Sutandi A S 2006 Inventarisasi Dan Evaluasi Bahan Galian Non Logam Di Kabupaten Lampung Tengah Dan Lampung Timur, Provinsi Lampung. (Lampung: Badan Geol. Kementeri. Energi Dan Sumber Daya Miner).