



ISSN 1907-350X

Volume 3 Nomor 2, Oktober 2008

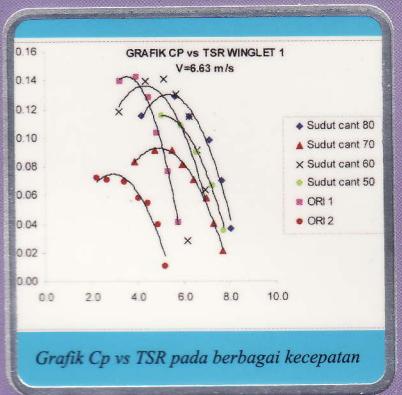

Grafik Cp vs TSR pada berbagai kecepatan

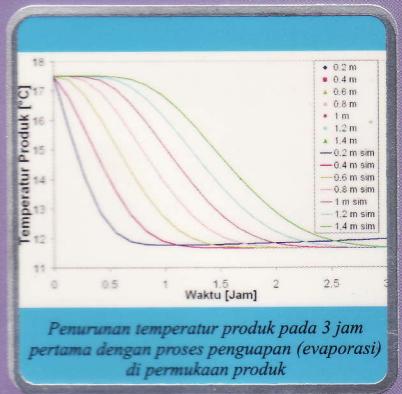

Temperatur Produk [°C]

Waktu [Jam]

- 0.2 m
- 0.4 m
- 0.6 m
- 0.8 m
- 1 m
- 1.2 m
- 1.4 m
- 0.2 m sim
- 0.4 m sim
- 0.6 m sim
- 0.8 m sim
- 1 m sim
- 1.2 m sim
- 1.4 m sim



JURNAL TEKNIK MESIN INDONESIA

JURNAL TEKNIK MESIN INDONESIA

ISSN 1907-350X

Volume 3 Nomor 2, Oktober 2008

SUSUNAN DEWAN PENYUNTING

Ketua Penyunting

Dr. Ing. Herman Sasongko

Institut Teknologi Sepuluh Nopember - Surabaya

Wakil Ketua Penyunting

Ir. Hendri D.S. Budiono, M.Eng

Universitas Indonesia - Jakarta

Penyunting Pelaksana

Ir. Sudjud Darsopuspito, MT

Institut Teknologi Sepuluh Nopember - Surabaya

Ir. Sutardi, M.Eng., Ph.D

Institut Teknologi Sepuluh Nopember - Surabaya

Dr. Ir. Agus Sigit Pramono, DEA

Institut Teknologi Sepuluh Nopember - Surabaya

Penyunting Ahli (Mitra Bestari)

Dr. Ir. M. Dirhamsyah

Universitas Syiah Kuala - Banda Aceh

Dr. Ir. Darwin, MT

Universitas Syiah Kuala - Banda Aceh

Dr. Ir. Farel H. Napitupulu, DEA

Universitas Sumatera Utara - Medan

Dr.-Ing. Ir. Ikhwan Syah Isranuri

Universitas Sumatera Utara - Medan

Prof. Dr. Ing. Mulyadi Bur

Universitas Andalas - Padang

Dr.-Ing. Hairul Abral

Universitas Andalas - Padang

Dr. Ir. Kaprawi Sahim, DEA

Universitas Sriwijaya - Palembang

Prof. Dr. Ir. Tresna P. Soemardi

Universitas Indonesia - Jakarta

Dr. Ir. Raldi Artono Koestoeer

Universitas Indonesia - Jakarta

Prof. Dr. Ir. Indra Nurhadi

Institut Teknologi Bandung - Bandung

Dr. Ir. Yatna Yuwana Martawirya

Institut Teknologi Bandung - Bandung

Ir. Sutrisno, MSME, Ph.D

Universitas Gajah Mada - Yogyakarta

Dr. Ir. Suhanan, DEA

Universitas Gajah Mada - Yogyakarta

Dr. Ir. Berkah Fajar TK., Dipl.Ing

Universitas Diponegoro - Semarang

Dr. Ir. Toni Prahasto, M.Ast

Universitas Diponegoro - Semarang

Ir. Bambang Indrayadi, MT

Universitas Brawijaya - Malang

Ir. Wahyono Suprapto, MT.Mat

Universitas Brawijaya - Malang

Prof. Ir. I Nyoman Sutantra, MSc, Ph.D

Institut Teknologi Sepuluh Nopember - Surabaya

Dr. Ir. Triyogi Yuwono, DEA

Institut Teknologi Sepuluh Nopember - Surabaya

Prof. Dr. IGB. Wijaya Kusuma

Universitas Udayana - Denpasar

Dr. Ir. I Nyoman Gde Antara, M. Eng

Universitas Udayana - Denpasar

Tri Rachmanto, ST, MT

Universitas Mataram - Mataram

Dr.-Ing. Ir. Wahyu H. Piarah, MSME

Universitas Hasanuddin - Makassar

Ir. Syamsul Bahri, MSi

Universitas Hasanuddin - Makassar

Dr. Ir. Fentje Abdulrauf

Universitas Sam Ratulangi - Manado

Ir. Arifin Sanusi, MT

Universitas Cendana - Kupang

Tata Pelaksana Usaha

Wawan Aries Widodo, ST, MT

Institut Teknologi Sepuluh Nopember - Surabaya

Giri Nugroho, ST.

Institut Teknologi Sepuluh Nopember - Surabaya

Wahyu Wijanarko, ST

Institut Teknologi Sepuluh Nopember - Surabaya

Sri Suharti, BA

Institut Teknologi Sepuluh Nopember - Surabaya

Alamat Penyunting

BKSTM - Jurusan Teknik Mesin FTI-ITS, Kampus ITS Sukolilo, Surabaya 60111

Telp. 031-5946230, Fax. 031-5922941 Email: mesin@me.its.ac.id

Bank BNI Urip Sumoharjo - Surabaya, No. Rek : 9805183-6, a.n. : Ir. Sudjud Darsopuspito, MT

JURNAL TEKNIK MESIN INDONESIA. Jurnal ilmiah sains dan teknologi diterbitkan secara berkala dua kali tiap tahun pada bulan April dan Oktober, diterbitkan oleh **Badan Kerjasama Teknik Mesin Indonesia (BKSTM)**. Dewan Penyunting mengundang para peneliti, praktisi, dan profesional di bidang ilmu teknik, khususnya Teknik Mesin, untuk menyumbangkan artikel ke dalam jurnal ini baik dari hasil penelitian maupun pengetahuan populer. Bagi para pembaca yang berminat untuk mendapatkan terbitan JURNAL TEKNIK MESIN INDONESIA secara teratur, Dewan Penyunting memberikan kesempatan untuk berlangganan dengan beaya langganan termasuk ongkos kirim tiap tahun : Rp. 75.000,00 (Jawa) atau Rp. 100.000,00 (Luar Jawa). Rekening Bank : BNI Urip Sumoharjo Surabaya No : 9805183-6 a.n Ir. Sudjud Darsopuspito, MT.

ISSN 1907-350X
Volume 3 Nomor 2, Oktober 2008

JURNAL TEKNIK MESIN INDONESIA

KATA PENGANTAR

Dengan mengucap syukur ke hadirat Tuhan Yang Maha Kuasa , Badan Kerja Sama Teknik Mesin Indonesia (BKSTM) bersama ini telah berhasil menerbitkan “**JURNAL TEKNIK MESIN INDONESIA**” untuk edisi : Volume 3 Nomor 2, Oktober 2008 .

Dalam edisi Oktober 2008 ini “**JURNAL TEKNIK MESIN INDONESIA**” memuat 8 (delapan) artikel yang diambil dari para peneliti anggota BKSTM , antara lain dari : Universitas Sam Ratulangi, Universitas Indonesia, Universitas Syiah Kuala, Universitas Lampung, Udayana University, Universitas Diponegoro, Universitas Gajah Mada, serta Institut Teknologi Bandung .

Dewan Penyunting mengucapkan terima kasih kepada semua atas terbitnya jurnal ini , khususnya kepada pengirim artikel serta para Penyunting Ahli atas partisipasinya dalam penerbitan ini .

Akhirnya Dewan Penyunting berharap semoga artikel-artikel dalam jurnal ini bermanfaat bagi para pembaca sekalian, dan semoga memberikan inspirasi untuk ikut berperan aktif menyumbangkan tulisannya yang merupakan sarana publikasi hasil penelitian maupun kajian pemikiran ilmiah, serta memberikan masukan berupa kritik dan saran , demi penyempurnaan “**JURNAL TEKNIK MESIN INDONESIA**”di masa mendatang .

Surabaya , Oktober 2008

Dewan Penyunting

JURNAL TEKNIK MESIN INDONESIA

Volume 3 Nomor 2, Oktober 2008

Program Macro-A untuk pocket 4 sisi dengan menggunakan mesin CNC MC520

Udink Aulia (Universitas Syiah Kuala)

(hal. 39 - 42)

Pengembangan sistem kabut air bertekanan rendah untuk pemadaman pool fire

Yulianto S Nugroho, Khairul Fajarudin, Dwi Wahyulianto, dan Harinaldi (Universitas Indonesia)

(hal. 43 - 47)

Stress concentration factors of stepped-shafts of circular-to-square cross section under twisting moment

Asnawi Lubis, Jamiatul Akmal (Universitas Lampung)

(hal. 48 - 52)

Damping characteristics, transmissibility, and isolation region of aluminium and gray cast iron composite

Tjokorda .Gde. Tirta. Nindha (Universitas Udayana)

(hal. 53 - 56)

Analisa kinerja mesin otto berbahan bakar premium dengan penambahan aditif oksigenat dan aditif pasaran

Bambang Sugiarto, Setyo Bismo, Arinal (Universitas Indonesia)

(hal. 57 - 62)

Penambahan winglet untuk meningkatkan unjuk kerja turbin angin pada kecepatan angin rendah

Sri Utami Handayani (Universitas Diponegoro), Sutrisno (Universitas Gajah Mada)

(hal. 63 - 67)

Proses perancangan papan skateboard dengan menggunakan struktur sandwich composite

Erlangga Andriana, Djoko Suharto, Hermawan Judawisastra (Institut Teknologi Bandung)

(hal. 68 - 75)

Simulasi proses pengeringan melalui pengkondisian kelembaban udara pengering

Nasruddin (Universitas Indonesia)

(hal. 76 - 79)



BADAN KERJA SAMA TEKNIK MESIN INDONESIA (BKS-TM)

Sekretariat :

Jurusan Teknik Mesin FTI ITS - Kampus ITS Sukolilo

Jl. Arief Rahman Hakim - Surabaya 60111

Telp. 031.5946230 , Fax. 031.5922941

ISSN 1907-350X



9 771907 350017

Stress Concentration Factors of Stepped-Shafts of Circular-to-Square Cross Section under Twisting Moment

Asnawi Lubis¹ & Jamiatul Akmal

Jurusan Teknik Mesin, Universitas Lampung
Gedung H Fakultas Teknik, Jalan Professor Sumantri Brojonegoro
Gedongmeneng, Bandar Lampung, 35145
Telp: (62-721) 7479221, 701609 ext. 221, Fax: (62-721) 704947
¹E-mail: asnawi-lubis@unila.ac.id

Abstract

Shaft is a machine element whose main function for power transmission. Shaft is often needed in stepped form (change in cross-section). For a non-smooth shaft (stepped shaft), the elementary stress equations are no longer hold for calculating the actual stress as the stress would be higher than the nominal stresses. To relate the maximum stress at the discontinuity with the nominal stress calculated using the elementary stress equation, a factor is needed which is called stress concentration factor (SCF). This paper presents a graph for design purpose of stress concentration factor of stepped shaft of circular-to-square cross-section under twisting moment. The graph was derived from an extensive liner finite element parametric study and presented in line of the well-known Peterson's graph for stepped shaft of uniform circular cross-section. Finite element parametric study was carried out for every combination of diameter to diagonal ratio, D/d and radius of fillet to diagonal ratio, r/d . For geometry with particular D/d value, six analyses were done by varying the r/d value. Stress distribution shows that maximum shearing stress located at the root of square, exactly at midside. In general graphical design similar to the well known Peterson graph was produced.

Keywords: stepped-shafts, stress-concentration factors, finite element analysis

Introduction

Shaft is a machine element whose function for power transmission. Shaft is often needed in stepped form (change in cross-section). Example is a rotated shaft with square shoulder for the seat of bearing. In such, the shaft could be subjected to combined loading of axial, bending, and torsion.

If a shaft is smooth, the resulting stress due to loading can be computed using the elementary stress equations. This stress is called nominal stress. For a non-smooth shaft (stepped shaft), the elementary stress equations are no longer hold for calculating the actual stress as the stress would be higher than the nominal stresses. To relate the maximum stress at the discontinuity with the nominal stress calculated using the elementary stress equation, a factor is needed which is called stress concentration factor (SCF). The magnitude of this factor depends on diameter ratio, shape and area of cross-section, radius of fillet and types of loading (axial, bending, torsion, or their combination).

Stress concentration factors for a stepped shaft of uniform cross-section can be found in many standard textbooks of mechanics of materials. Until now, the most complete source of graph of stress concentration factors

for various geometry of shaft, bar, and plat is a compendia by Peterson [1974]. In this compendia, stress concentration factor (K_c) for stepped shaft of uniform cross-section are plotted as function of non-dimensional geometry. Today state of the art modern literature are also still using the Peterson's graph for analyzing the stepped shaft of uniform cross-section, see for example, Kang, et al [2005]. Pan, et al [2000] used the Peterson's graph to analyze the torsional vibration of stepped shaft. Kim and Kim [1995] used the same graph to analyze the stresses at the stepped shaft subjected to axial tension.

In the compendia of stress concentration factors by Peterson, a graph for stepped shaft of circular-to-square cross-section is not available. Baker [1999] carried out a finite element study using ALGOR version 3.18 to obtain the characteristic of stepped shaft of circular to square cross-section subjected to combined loading of static bending and torsion. In his MSc thesis, Baker investigated three values of diameter ratio, but did not make the radius of filled varied so graphs that can be used for design purpose were not produced. To analyze a stepped shaft of circular-to-square cross-section, it is common to apply the graph for stepped shaft of uniform circular cross-section of equivalent crosssectional area to

square [Yusron, 2004]. This was usually done because similar graph for stepped shaft of circular-to-square cross-section was not available either in textbooks or in today state of the art modern literature. However, current study on stress concentration factor of stepped shaft of circular-to-square cross-section under axial tension and pure bending was presented in two papers by Lubis and Akmal [2006]. The present paper is a continuation of that study where stepped shaft of circular-to-square cross-section was subjected to static twisting moment and a graph for stress-concentration factor was produced. The graph was derived from a series of extensive linear finite element parametric study and presented in line of the well-known Peterson's graph for stepped shaft of uniform circular cross-section.

Stress-Concentration Factors

Shaft is an important element in mechanical construction. Shaft is usually has function for power transmission. Shaft can be found as square cross-section as well as circular cross section. However, majority of shaft are circular cross-section as its main function is for power transmission, whereas, shaft of square cross-section is usually only used for supporting load.

Circular shaft is a rotating element where other elements such as gears and pulley are mounted. Such a shaft could be subjected to axial (tension or compression), bending, torsion, or their combination as shown in Figure 1.

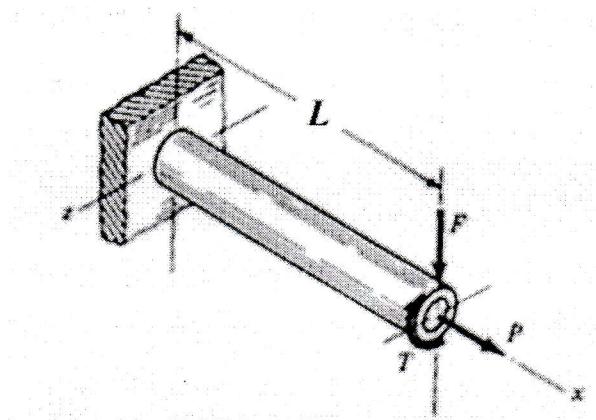


Figure 1 A circular shaft subjected to combined loading of axial, bending and torsion

In particular application, a shaft of non-uniform area of cross section (stepped shaft) might be used. Change in area of cross-section of stepped shaft results in stress concentration at the discontinuity. In order to reduce the effect of stress concentration at the region of change in cross-section, fillet of radius r is usually applied as shown in Figure 2.

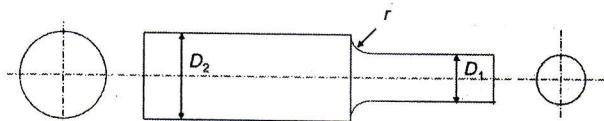


Figure 2 Circular stepped shaft with shoulder or radius r

The ratio of maximum stress at a critical point to the nominal stress is called stress concentration factor (SCF). Stress concentration factor of circular stepped shaft has been given by Peterson [1974]. The magnitude of this factor is a function of non-dimensional parameter D_2/D_1 and r/D_1 . Stress concentration factor, K_t , can be written as:

$$K_t = \frac{\sigma_{\max}}{\sigma_{\text{nom}}} ; \text{ For normal stress} \quad (1a)$$

$$K_{ts} = \frac{\tau_{\max}}{\tau_{\text{nom}}} ; \text{ For shear stress} \quad (1b)$$

Where, for circular cross section the nominal stress is given by:

$$\sigma_{\text{nom}} = \frac{4P}{\pi D_1^2} ; \text{ For axial load} \quad (2)$$

$$\sigma_{\text{nom}} = \frac{32M}{\pi D_1^3} ; \text{ For bending load} \quad (3)$$

$$\tau_{\text{nom}} = \frac{16T}{\pi D_1^3} ; \text{ For torsion load} \quad (4)$$

Figure 3 shows a typical graph of stress concentration factor for circular stepped-shaft under twisting moment. The graph was taken from a book of "Stress Concentration Factor" by Peterson [1974]. Similar graph for axial and bending load can be obtained from the same book.

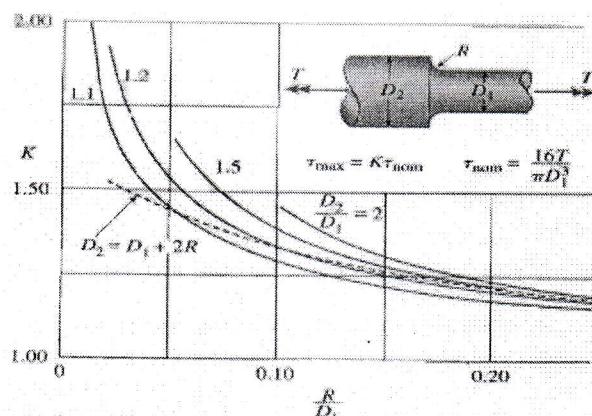


Figure 3 Stress-concentration factors for circular stepped-shaft under torsion [Peterson, 1974]

In the book of Peterson, it cannot be found a graph of stress-concentration factor for a stepped shaft of circular-to-square cross-section (Figure 4). In fact, stepped shaft of this form can be found in practice, such as, the output low speed reducer at mill and diffuser station in sugar cane industry [Yusrion, 2004]. This paper aims to provide a graph of stress concentration factors of stepped shafts of circular to square cross section under twisting moment that can be used directly for design purpose.

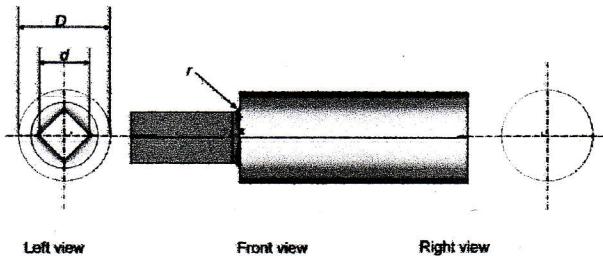


Figure 4 Stepped shaft of circular to square cross-section

Finite Element Analysis

Figure 4 shows a stepped shaft of circular cross section of diameter D to square cross-section of diagonal d . Finite element parametric study was carried out for every combination of parameter D/d and r/d . For geometry with particular D/d value, six analyses were done by varying the r/d value. Table I gives the geometry configuration for parametric finite element study performed.

Table I Geometric configuration for parametric study
(see Figure 2)

D/d	r/d					
	0.05	0.10	0.15	0.20	0.25	0.30
1.1	0.05	0.10	0.15	0.20	0.25	0.30
1.2	0.05	0.10	0.15	0.20	0.25	0.30
1.5	0.05	0.10	0.15	0.20	0.25	0.30
2.0	0.05	0.10	0.15	0.20	0.25	0.30
2.5	0.05	0.10	0.15	0.20	0.25	0.30
3.0	0.05	0.10	0.15	0.20	0.25	0.30

Figure 5 shows a typical finite element model of the shaft. The element type used has ten nodes with three degree of freedom at each node: translation in the $-x$, $-y$, and $-z$ direction. All nodes at the circular end were fixed and twisting moment was applied at the central node of the square cross section end. The central node was connected to all nodes at the four sides of the square using beam element of relatively higher stiffness than the element type for the shaft.

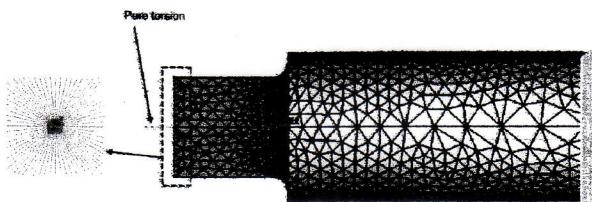


Figure 5 Typical finite element model of stepped shaft of circular to square cross-section

Figure 6 shows the shear stress distribution along the shaft due to pure torsion. The maximum shear stress can be read from the graph. This maximum stress was then recorded for every combination of parameter D/d and r/d and divided by the nominal stress for twisting moment [see equation (5)]. From this, a graph in line of Peterson's for uniform circular stepped shaft can then be plotted.

$$\tau_{nom} = \frac{T}{0.208s^3} \quad (5)$$

Where, T = twisting moment, N.mm
 s = length of side of square cross section, mm

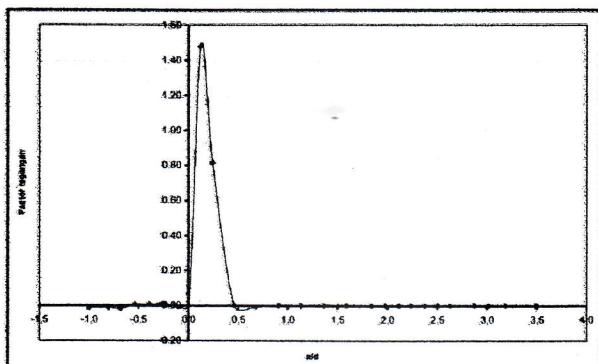


Figure 6 shear stress distributions in circular-to-square stepped-shaft due to twisting moment

Results & Discussion

Figure 6 shows the shear stress contour plot for the shaft considered. It can be seen that the maximum shear stress located at region of change in cross-section, exactly at the midside of the cross section with fillet. The maximum stresses were then recorded and divided by the nominal stress [Equation (5)] to obtained stress concentration factors. A graph of stress concentration factors can then be plotted as shown in Figure 7.

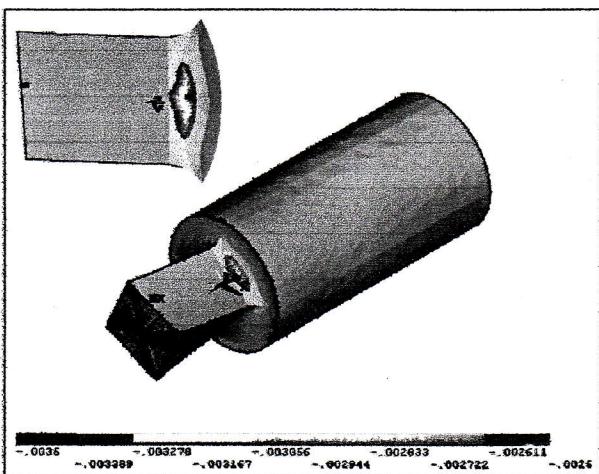


Figure 6 shear stress contour of circular-to-square stepped shaft due to pure torsion

As can be seen from Figure 7, stress concentration factors decrease as the radius of filled to diagonal ratio increase. The graph shows a similar trend to the well-known Peterson's graph for stressconcentration factor for stepped shaft of uniform circular or square cross-section. By comparing Figure 7 with Figure 3 and 4, it seems that the effect of diameter to diagonal ratio, D/d , is of less significant. It should be noted, however, that the spectrum of this ratio is small compared with Figure 3 and 4. A wide range of D/d values should be included and this is the subject of further publication elsewhere.

Conclusion

A graph for stress concentration factors of stepped shaft of circular to square cross section under pure bending load was produced. This graph was derived from parametric finite element study and can be directly used for design purpose. This graph shows a similar trend to the well known Peterson's graph for stress concentration factors of uniform circular or square stepped shaft.

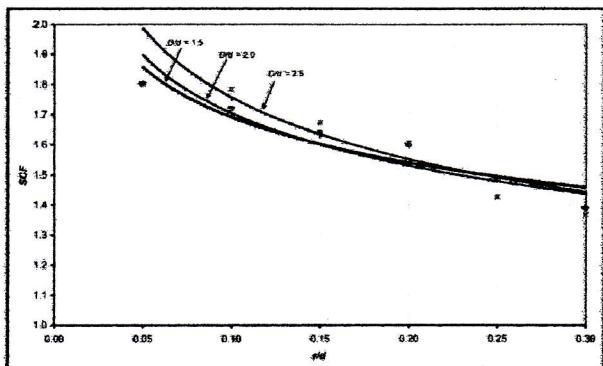


Figure 7 Stress concentration factor of stepped-shaft of circular-to-square cross section under torsion

Acknowledgement

The authors would like to acknowledge DIKTI of the National Education Department for providing fund through fundamental research grant under contract No. 010/SP3/PP/DP2M/II/2006.

References

- [1] Baker, D.A., 1999, *A Finite Element Study of Stresses in Stepped Splined Shafts and Partially Splined Shafts under Bending, Torsion, and Combined Loadings*. MSc Thesis, Virginia Polytechnic Institute and State University
- [2] Benham, P.P., R.J. Crawford, and C.G. Armstrong, 1996, *Mechanics of Engineering Materials*, second edition. Longman Group Limited, UK
- [3] Cook, R.D., and W.C. Young, 1999, *Advanced Mechanics of Materials*, second edition. Prentice-Hall International Inc.
- [4] Den Hartog, J.P., 1952, *Advanced Strength of Materials*. McGraw-Hill Book Company, New York.
- [5] Feese, T., and C. Hill, 2002, *Guidelines for Preventing Torsional Vibration Promlems in Reciprocating Machinery*. Proceedings of Gas Machinery Conference, Nashville, Tennessee, USA.
- [6] Kang, M.K., R. Huang, and T. Knowless, 2005, *Torsional Vibration of Circular Elastic Plates with Thickness Steps*. IEEE Transactions on Ultrasonics, Ferroelectric, and Frequency Control.
- [7] Kim, Y.Y., and J.H. Kim, J.H., 1995, *Stress Analysis of a Stepped Shaft under Remote Tension*. Quarterly Journal of Applied Mathematics, Vol. 48, pp. 517 – 530.
- [8] Lubis, A., and J. Akmal, 2006, *Stress Concentration Factors of Stepped Shafts of Circular-to-Square Cross-Section under Axial Tension*. Proceeding Seminar Nasional Teknologi Industri (TEKNOIN), Universitas Islam Indonesia, Yogyakarta.
- [9] Lubis, A., and J. Akmal, 2006, *Stress Concentration Factors of Stepped Shafts of Circular-to-Square Cross-Section under Pure Bending*. Proceeding Seminar Nasional Tahunan Teknik Mesin ke-5 (SNTTM-5), Universitas Indonesia, Depok.
- [10] Pan, J.Q., et. al., 2000, *Three-Dimensional Response and Intensity of Torsional Vibration in a Stepped Shaft*. Journal of Sound and Vibration, Vol. 236, pp. 115 – 128.
- [11] Peterson, R.E., 1974, *Stress Concentration Factors*. John Wiley & Sons, Inc.

- [12] **Popov, E.P.**, 1978, *Mechanics of Materials*, second edition. Prentice-Hall Inc., New Jersey, USA.
- [13] **Roark, R.J., and W.C. Young**, 1975, *Formula for Stress and Strain*, fifth edition. McGraw-Hill Book Company, New York.
- [14] **Saeed, M.**, 1987, *Finite Element Analysis (Theory and Application with ANSYS)*. Minnesota State University, Mankato, USA.
- [15] **Timoshenko, S.P.**, 1998, *Mechanics of Materials*, third SI edition. Stanley Thornes (Publisher) Limited.
- [16] **Timoshenko, S.P., and J.N. Goodier**, 1970, *Theory of Elasticity*, third edition. McGraw-Hill Book Company, New York.
- [17] **Yusron, N.**, 2004, *Fracture Analysis of a Square Shaft Output Low Speed Reducer of Mill and Diffuser Station of Sugar Cane Industry of PT Bunga Mayang of North Lampung (In Indonesia)*. Student Job Training Report, Department of Mechanical Engineering, University of Lampung.