



Czech University of Life Sciences Prague

**Faculty of
Engineering**

TAE 2019

**Proceeding of 7th International Conference on
Trends in Agricultural Engineering 2019**

17th - 20th September 2019

Prague, Czech Republic

Proceeding of 7th International Conference on Trends in Agricultural Engineering 2019

September 17th 2019 – September 20th 2019

Publisher: Czech University of Life Sciences Prague Kamýcká 129, Prague,
Czech Republic

Editor in chief: David Herák

Printing house: Powerprint s.r.o.

Number of copies: 130

Number of pages: 640

Issue: First

Year: 2019

All manuscripts in conference proceedings have been reviewed by peer review process

ISBN 978-80-213-2953-9

The authors shall be solely responsible for the technical and linguistic accuracy of the manuscripts

CZECH UNIVERSITY OF LIFE SCIENCES PRAGUE



Faculty of Engineering



7th International Conference on Trends in Agricultural Engineering 2019

**Proceeding of 7th International Conference on
Trends in Agricultural Engineering 2019**

September 17th 2019 – September 20th 2019

Prague

Czech Republic

Editor in chief: David Herák

Online version is available at <http://proceedings.tae-conference.cz/>

ISBN 978-80-213-2953-9

7th International Conference on Trends in Agricultural Engineering 2019

September 17th 2019 – September 20th 2019

Conference TAE 2019 publishes research in engineering and physical sciences that represent advances in understanding or modelling of the performance of biological and physical systems for sustainable developments in land use and the environment, agriculture and amenity, bioproduction processes and the food chain, logistics systems in agriculture, manufacturing and material systems in design of agriculture engineering.

Conference venue:

Faculty of Engineering, Czech University of Life Sciences Prague, Kamýcká 129, Praha 6, Prague, 16521, Czech Republic

The 7th TAE conference is organized under the auspices of dean of Faculty of Engineering **doc. Ing. Jiří Mašek, Ph.D.**

Chairman of the conference: David Herák, Czech Republic

Scientific committee:

Nikolay Aldoshin – Russia

Vigen Arakelyan – France

Feto Berisso - Ethiopia

Jiří Blahovec - Czech Republic

Volodymyr Bulgakov - Ukraine

Roberto D'Amato - Spain

Luis Caicedo - Equador

Richard Godwin - UK

Gurkan Gurdil - Turkey

Rostislav Chotěborský - Czech Republic

Jaime Janairo - Philipine

Vytenis Jankauskas - Lithuania

Algirdas Jasinskas - Lithuania

Manoj Karkee - USA

Marián Kučera - Slovakia

František Kumhála - Czech Republic

Martin Libra - Czech Republic

José Machado - Portugal

Simon Popescu - Romania

Alessandro Ruggiero - Italy

John Schueller - USA

Riswanti Sigalingging - Indonesia

Willi Toisuta - Australia

Sotos Voskarides - Cyprus

Stavros Yanniotis - Greece

All manuscripts in conference proceedings have been reviewed by peer review process.

Reviewers:

Z. Aleš, V. Arakelyan, A. Brunerová, O. Dajbych, G. Gurdil, D. Herák, P. Hrabě, R. Chotěborský, J.

Chyba, V. Jurča, A. Kabutey, A. Kešner, P. Kic, M. Kroulík, F. Kumhála, J. Kumhalová, M. Libra, M.

Linda, J. Mašek, Č. Mizera, M. Müller, R. Napitupulu, P. Neuberger, P. Novák, S. Pandiangan, M. Petřů,

M. Pexa, K. Selvi, R. Sigalingging, E. Simanjuntak, P. Šařec

Warm Welcome to Trends in Agriculture Engineering 2019

The progressive prestige that Trends in Agriculture Engineering international conference has reached during the last 25 years has made it as a world-wide reference about fast development of agriculture from its engineering point of view, and the meeting point for professionals with responsibilities in the improvement of this essential area of whole nations. 108 scientific papers have been selected for TAE 2019 through the Scientific committee of the conference to be presented in a wide thematic spectrum, to promote and to share the newest and the most relevant aspects of agricultural engineering area. Trends in Agriculture Engineering conference become the scientific hub of the global agricultural engineering research and a forum for the future of agri-food production.

The Faculty of Engineering, Czech University of Life Sciences Prague, organizer of this 7th TAE conference, welcomes you in this event. Prague, capital and the largest city of the Czech Republic, welcomes you with its cordiality for making you stay with us the most pleasant possible.

Sincerely

Assoc. prof. Ing. Jiří Mašek, Ph.D.
Dean of Faculty of Engineering
Czech university of Life Sciences Prague



CONTENTS

Rudolf Abrahám, Tomáš Zubčák, Radoslav Majdan <i>DRAWBAR PULL OF SMALL TRACTOR WITH SPECIAL LUG WHEELS</i>	2
Radomír Adamovský, Pavel Neuberger <i>HORIZONTAL GROUND HEAT EXCHANGERS – LOW-TEMPERATURE ENERGY SOURCE</i>	8
Olaosebikan Layi Akangbe, Jiří Blahovec, Radomír Adamovský, Miloslav Linda, Monika Hromasová <i>A DEVICE TO MEASURE WALL FRICTION DURING UNIAXIAL COMPRESSION OF BIOMATERIALS</i>	14
Nikolay Aldoshin, Otari Didmanidze, Bakhadir Mirzayev, Farmon Mamatov <i>HARVESTING OF MIXED CROPS BY AXIAL ROTARY COMBINES</i>	20
Zdenek Ales, Jindrich Pavlu, Marian Kucera, Vaclav Legat <i>RELIABILITY CHARACTERISTICS OF MECHANICAL OBJECTS OF AGRICULTURAL MACHINES</i>	26
Marek Angelovič, Koloman Krištof, Michal Angelovič, Ján Jobbágy <i>THE EFFECT OF POST-HARVEST PROCESSING IN MODEL LINE AT FOOD MAIZE GRAINS EXTERNAL AND INTERNAL QUALITY</i>	32
Sergey Antonov, Gennady Nikitenko <i>SIMULATION OF LINEAR ELECTRIC MOTOR FOR ELECTROMECHANICAL PRUNER</i>	40
Vigen Arakelian <i>GRAVITY COMPENSATION IN ROBOTICS – A REVIEW</i>	45
Dainis Berjoza, Ilmars Dukulis, Vilnis Pirs, Inara Jurgena <i>TESTING AUTOMOBILE BRAKING PARAMETERS BY VARYING THE LOAD WEIGHT</i>	51
Matúš Bilčík, Monika Božiková, Martin Malínek, Patrik Kósa, Marián Kišev, Juraj Baláži, Ana Petrović, Ján Csillag <i>THE TIME-TEMPERATURE DEPENDENCIES OF POLYCRYSTALLINE PHOTOVOLTAIC MODULE DIFFERENT PARTS</i>	59
Jiří Blahovec, Pavel Kouřím <i>THERMAL ANALYSIS OF POTATO AND CARROT TISSUES AFTER PROCESSING BY PULSED ELECTRIC FIELD</i>	65
Sylwester Borowski <i>THE EFFECT OF THE CHANGE IN THE COMPOSITION OF THE SUBSTRATE IN THE AGRICULTURAL BIOGAS PLANT ON THE LOGISTICS OF MAIZE CHAFF</i>	71
Marián Bujna, Paweł Kielbasa <i>OBJECTIFICATION OF FMEA METHOD PARAMETERS AND THEIR IMPLEMENTATION ON PRODUCTION ENGINEERING</i>	75
Volodymyr Bulgakov, Valerii Adamchuk, Volodymyr Nadykto, Volodymyr Kyurchev <i>INFLUENCE OF MACHINE-TRACTOR SET CONSTRUCTIONAL PARAMETERS ON KINEMATIC DISCREPANCY IN TRACTOR WHEELS</i>	81
Patrik Burg, Alice Čížková, Vladimír Mašán, Jana Burgová, Božena Gladyszewska <i>THE IMPACT OF MULCHING MATERIALS ON THE SOIL MOISTURE DYNAMICS IN CENTRAL EUROPEAN VINEYARDS</i>	87
Nikola Čermáková, Petr Šařec, Oldřich Látal <i>IMPACT OF MANURE AND SELECTED CONDITIONNERS ON PHYSICAL PROPERTIES OF CLAY SOIL</i>	93
Peter Čičo, Róbert Drlička, Radovan Šoška, Zdenko Róna <i>SOIL TESTS OF RENOVATED PLOUGHSHARE POINTS</i>	99
Ján Csillag, Ana Petrović, Vlasta Vozárová, Matúš Bilčík, Monika Božiková, Tomáš Holota <i>COMPARISON OF RHEOLOGICAL PROPERTIES OF NEW AND USED BIOLUBRICANTS</i>	103



Metin Dağtekin, Gürkan A. K. Gürdil, Bahadır Demirel <i>BIO-ENERGY POTENTIAL FROM LEMON ORCHARDS</i>	109
Oldřich Dajbých <i>ULTIMATE TENSILE STRENGTH OF THE STRING DETERMINATION USING SPECTRAL ANALYSIS</i>	113
Milan Daneček, Ivan Uhlíř <i>FAST AND RELIABLE POWER MEASUREMENT FOR ENERGY SOURCES TO ENHANCE DISTRIBUTION GRID STABILITY</i>	117
Šárka Dvořáková, Josef Zeman <i>ELLIPSE ROTATION UNDER A PRESSURE</i>	123
Vítězslav Fliegel, Petr Lepšík, Rudolf Martonka <i>INNOVATION MEASUREMENT DEVICE OF CAR SEATS</i>	127
Richard Godwin, Paula Misiewicz, David White, Edward Dickin, Tony Grift, Emily Pope, Anthony Millington, Rayhan M. Shaheb, Magdalena Dolowy <i>THE EFFECT OF ALTERNATIVE TRAFFIC SYSTEMS AND TILLAGE ON SOIL CONDITION, CROP GROWTH AND PRODUCTION ECONOMICS - EXTENDED ABSTRACT</i>	133
Ioannis Gravalos, Theodoros Gialamas, Avgoustinos Avgoustis, Dimitrios Kalfountzos, Martin Libra <i>A PORTABLE ROVER AS A TOOL FOR SOIL WATER MONITORING</i>	135
Gürkan A. K. Gürdil, Metin Dağtekin, Bahadır Demirel, Çimen Demirel, Vaclav Novak, Mahmut Dok <i>DETERMINING PELLETING PARAMETERS FOR ORANGE PRUNING RESIDUES</i>	141
Ondřej Hadač, Petr Lepšík <i>DESIGN OF A CMM ACTUATION SYSTEM</i>	147
Jan Hart, Veronika Hartová, Martin Kotek, Veronika Štekerová <i>ANALYSIS OF WIRELESS TRANSMISSION LATENCY IN THE 2.4 GHZ AND 5 GHZ ISM UNDER LOAD OF NETWORK WITH DATA STREAM</i>	153
Petr Heřmánek, Adolf Rybka, Ivo Honzík <i>QUALITY OF HOPS AT DIFFERENT DRYING TEMPERATURES IN CHAMBER DRYER</i>	159
Peter Hlaváč, Monika Božiková, Zuzana Hlaváčová <i>SELECTED RHEOLOGICAL PROPERTIES OF SOME TOMATO KETCHUPS</i>	165
Michal Holúbek, Jakub Čedík, Hien Vu, Martin Pexa <i>INFLUENCE OF DIESEL – BUTANOL FUEL BLENDS ON PRODUCTION OF SOLID PARTICLES BY CI ENGINE</i>	171
Lukáš Jan Hrabánek <i>THE COMBINATION OF RETROREFLECTIVE MATERIALS ON ROAD SIGNS</i>	177
Lubomír Hujo, Štefan Čorňák, Zdenko Tkáč, Michaela Jánošová <i>LABORATORY RESEARCH OF TRANSMISSION – HYDRAULIC FLUID</i>	183
Bohumil Chalupa, Josef Zeman <i>THE TIDAL COMPONENT OF NATURAL RADIATION BACKGROUND</i>	189
Ladislav Chládek, Pavel Kic, Petr Vaculík, Pavel Braný <i>THE IMPACT OF USED DIFFERENT COLORED RAW MATERIALS ON COLOUR OF PRODUCED BEER</i>	193
Rostislav Chotěborský <i>WEAR RESISTANT HIGH BORON STEEL FOR AGRICULTURE TOOLS</i>	199
Shigeru Ichiura, Tomohiro Mori, Ken-Ichi Horiguchi, Mitsuhiro Katahira <i>EXPLORING IOT BASED BROILER CHICKEN MANAGEMENT TECHNOLOGY</i>	205
Dewi Agustina Iryani, Agus Haryanto, Wahyu Hidayat, Amrul, Mareli Telaumbanua, Udin Hasanudin, Sihyun Lee <i>TORREFACTION UPGRADING OF PALM OIL EMPTY FRUIT BUNCHES BIOMASS PELLETS FOR GASIFICATION FEEDSTOCK BY USING COMB (COUNTER FLOW MULTI-BAFFLE) REACTOR</i>	212



Juraj Jablonický, Peter Opálený, Daniela Uhrinová, Juraj Tulík, Lazar Savin <i>INFLUENCE OF ECOLOGICAL FLUID ON THE WET DISC BRAKE SYSTEM OF THE TRACTOR</i>	218
Ivan Janoško, Patrícia Feriancová <i>THE EFFECT OF DIESEL ADDITIVE ON EMISSIONS AND ENGINE PERFORMANCE</i>	225
Algirdas Jasinskas, Jonas Čėsna, Nerijus Pašvenskas, Rolandas Domeika, Kęstutis Romanekas, Jiří Mašek <i>STRAW PELLETS UTILIZATION FOR REDUCTION OF LIQUID MANURE HARMFUL GAS EMISSIONS</i>	231
Petr Jindra <i>STUDY OF HHO GAS INFLUENCE ON OPERATING PARAMETERS IN CI ENGINE</i>	237
Onder Kabas, K. Cagatay Selvi, Ilker Unal <i>DETERMINATION OF SOME ENGINEERING PROPERTIES OF KUMQUAT RELATED TO DESIGN PARAMETERS</i>	241
Abraham Kabutey, Cestmir Mizera, David Herak, Petr Hrabec <i>PRELIMINARY EXPERIMENT ON COMPRESSION AND RELAXATION BEHAVIOUR OF BULK SESAME SEEDS AT VARYING FORCES AND SPEEDS</i>	245
Ingrid Karandušovská, Jana Lendelová, Štefan Bod'o, Štefan Mihina, Štefan Pogran <i>PRODUCTION OF POLLUTANTS FROM ORGANIC LITTER FOR DAIRY COW</i>	251
Jerzy Kaszkowiak, Marietta Markiewicz, Pawel Krzaczek <i>IMPACT OF THE APPLICATION OF BIOESTERS' ADDITION TO DIESEL OIL ON THE COURSE OF TURNING MOMENT AND POWER WITHIN THE SCOPE OF LOW ROTATIONAL SPEED AT VARIABLE SETTINGS OF FUEL INJECTION</i>	257
Mariia Khrapova, Lukáš Jan Hrabánek, David Marčev <i>THE DEGRADATION RATE OF RETROREFLECTIVE MATERIALS</i>	263
Ján Kosiba, Juraj Jablonický, Rastislav Bernát, Zoltán Záležák <i>FLOW CHARACTERISTICS OF THE TRACTOR HYDRAULIC CIRCUIT BY APPLICATION OF THE BIODEGRADABLE SYNTHETIC FLUID</i>	269
Martin Kotek <i>ANALYSIS OF PARTICULATE MATTER PRODUCTION DURING DPF SERVICE REGENERATION</i>	275
Pavel Kouřím, Bohumil Chalupa, Josef Zeman <i>VARIATION OF THE STERILISATION BOTTLE FOR SOLAR WATER DISINFECTION</i>	281
Pavel Kovaříček, Josef Hůla, David Hájek, Marcela Vlášková <i>SURFACE WATER RUNOFF DURING RAINFALL AFTER COMPOST INCORPORATION INTO SOIL</i>	287
Václav Křepčík, František Kumhála, Jakub Lev <i>MEASUREMENT THE VOID OF WOODEN CHIPS BY GAS DISPLACEMENT METHOD</i>	293
Marian Kučera, Milan Kadnár, František Tóth, Jozef Rédl, Jozef Nosian <i>EFFECT OF LOAD CONDITIONS ON THE SIZE AND PRODUCTS OF WEAR</i>	299
František Kumhála <i>DEVELOPMENT OF CAPACITIVE THROUGHPUT SENSOR FOR PLANT MATERIALS</i>	305
Jitka Kumhálová, Miroslav Růžička, Elena Castillo Lopéz, Martin Chyba <i>LOGISTICS SPRAWL IN PRAGUE'S SUBURB FROM SATELLITE IMAGES</i>	319
Jiří Kuře, Rostislav Chotěborský, Monika Hromasová, Miloslav Linda <i>DATA COLLECTION FOR NON LINEAR SOIL MODEL OF DEM</i>	325
Martin Kůrka, Michal Hruška <i>ASSESSMENT OF THE WAY HOLDING STEERING WHEEL IN DIFFERENT TRAFFIC SITUATIONS</i>	331
Ján Lilko, Martin Katus, Peter Dobiaš, Ondrej Ponjičan <i>HARDFACING ELECTRODES RESISTANCE IN LABORATORY CONDITIONS</i>	337
Miroslav Macák, Vladimír Rataj, Marek Barát, Ján Kosiba, Jana Galambošová <i>DETERMINING SOIL COMPACTION AT TRAFFIC LINES WITH PROXIMAL SOIL SENSING</i>	341



Daniel Mader, Martin Pexa, Jakub Čedík, Bohuslav Peterka, Zbyněk Vondrášek <i>INFLUENCE OF OPERATING PARAMETERS OF THE VEHICLE ON THE ROLLING RESISTANCE SIZE WITH THE VARIABLE DIAMETER OF THE TEST ROLLER</i>	347
Jakub Mařík, Veronika Hartová, Martin Kotek <i>INFLUENCE OF BIOFUELS ON SKODA RAPID 1.6 TDI ENGINE'S EMISSIONS AND FUEL CONSUMPTION</i>	355
Marietta Markiewicz, Jerzy Kaszkowiak <i>RESEARCH ON ENGINE POWERED WITH A MIXTURE OF DIESEL OIL AND BIOCOMPONENT AT CHANGE OF FUEL INJECTION SETTINGS</i>	361
Marietta Markiewicz, Łukasz Muślewski <i>ANALYSIS OF TOXIC COMBUSTION COMPONENTS OF THE DIESEL ENGINE POWERED WITH A BLEND OF DIESEL FUEL AND BIODIESEL</i>	368
Ivan Mašín <i>EVOLUTIONARY ANALYSIS OF AUTONOMOUS AGRICULTURAL VEHICLES</i>	375
Adéla Melicharová, Jiří Mašek, Stanislav Kovář <i>INFLUENCE OF SOIL TILLAGE ON WATER INFILTRATION IN LIGHT SOIL CONDITIONS OF CENTRAL BOHEMIA</i>	379
Miroslav Mimra, Miroslav Kavka, Petr Markytán <i>EVALUATION OF ECONOMIC RISKS IN PRODUCING WINTER OILSEED RAPE</i>	385
Bakhadir Mirzayev, Farmon Mamatov, Nikolay Aldoshin, Mansur Amonov <i>ANTI-EROSION TWO-STAGE TILLAGE BY RIPPER</i>	391
Jaroslav Mlýnek, Michal Petruš, Tomáš Martinec <i>DESIGN OF COMPOSITE FRAMES USED IN AGRICULTURAL MACHINERY</i>	396
Tomohiro Mori, Mitsuhiko Katahira <i>EVALUATING THE PERFORMANCE OF AI FOR SORTING GREEN SOYBEAN</i>	402
Pavel Neuberger, Radomír Adamovský <i>VERTICAL GROUND HEAT EXCHANGERS – LOW-TEMPERATURE ENERGY SOURCES</i>	407
Ha Nguyen Van, Ladislav Sevcik <i>OPTIMIZATION OF THE GROOVE CAM MECHANISM</i>	413
Václav Novák, Kateřina Křížová, Petr Šařec, Ondřej Látal <i>EFFECTIVE DOSE OF BIOCHAR WITHIN THE FIRST YEAR AFTER APPLICATION</i>	422
Alexander Pastukhov, Evgeny Timashov, Olga Sharaya, Dmitry Bakharev <i>CAE-JUSTIFICATION OF THE LEADING SHAFT OF THE TEST STAND</i>	429
Jindrich Pavlu, Vaclav Legat, Zdenek Ales <i>ESTIMATION TRENDS IN THE MAINTENANCE OF A MANUFACTURING EQUIPMENT RELATION TO THE INDUSTRY 4.0 CHALLENGE</i>	435
Ana Petrović, Vlasta Vozárová, Ján Csillag, Matúš Bilčík <i>SOME PHYSICAL PROPERTIES OF BIODIESEL BLENDS WITH GASOLINE</i>	441
Martin Polák <i>BEHAVIOUR OF 3D PRINTED IMPELLERS IN PERFORMANCE TESTS OF HYDRODYNAMIC PUMP</i>	447
Jozef Rédl, Marian Kučera <i>RAIN-FLOW ANALYSIS OF PLOUGH FRAME BEAM</i>	453
Kęstutis Romaneckas, Aida Adamavičienė, Edita Eimutytė, Jovita Balandaitė, Algirdas Jasinskas <i>THE IMPACT OF WEED CONTROL METHODS ON SUGAR BEET CROP</i>	459
Adolf Rybka, Petr Heřmánek, Ivo Honzík <i>HOP DRYING IN BELT DRYER USING COOLING CHAMBERS</i>	464
Martina Ryvolová <i>THE EFFECT OF MOISTURE ON THE MECHANICAL PROPERTIES OF FLAX PREPREG</i>	470
Jana Šafránková, Václav Beránek, Martin Libra, Vladislav Poulek, Jan Sedláček <i>CONSTRUCTION AND MONITORING OF THE UNIQUE ROOF PHOTOVOLTAIC SYSTEM IN PRAGUE</i>	476



Jan Sailer, Tomáš Hladík <i>CONSISTENT MAINTENANCE MANAGEMENT MODEL</i>	482
Ondřej Šařec, Petr Šařec <i>TILLAGE SYSTEMS OF WINTER OILSEED RAPE (BRASSICA NAPUS L.) PRODUCTION WITH RESPECT TO COSTS, ENERGY AND LABOUR CONSUMPTION</i>	488
Petr Šařec, Václav Novák, Kateřina Křížová <i>EFFECT OF ORGANIC FERTILIZERS, BIOCHAR AND OTHER CONDITIONERS ON MODAL LUVISOL</i>	494
Kemal Çağatay Selvi, Önder Kabaş, Mehmet Karataş <i>FORCE REQUIREMENTS OF DIFFERENT MANUAL PRUNING SHEARS WHEN CUTTING ABELIA (ABELIA GRANDIFLORA) BRANCHES</i>	500
Anna Oktavina Sembiring <i>UTILIZATION OF ENVIRONMENTAL ENGINEERING TECHNOLOGY IN PALM OIL INDUSTRY: CURRENT STATE</i>	506
Ladislav Ševčík <i>PROTECTIVE ELEMENTS OF AGRICULTURAL ELECTRIC VEHICLES</i>	510
Antonín Sirotek, Jan Hart <i>COMPARISON OF GSM AND GPS TECHNOLOGIES FOR TRACKING PEOPLE</i>	514
Vladimír Sojka, Petr Lepšík, Petra Hendrychová <i>MINIMIZING OF SETUP ATTEMPTS ON KILNFORMING PROCESS WITH DOE</i>	518
Jiří Souček, Radek Pražan, Jan Velebil <i>EFFECT OF NITROGEN FERTILIZATION ON THE COLOUR OF WHEAT LEAVES AS AN INDICATOR OF APPLICATION DEFICIENCY</i>	524
Karel Stary, Zdeněk Jelínek, Jan Chyba <i>STRESS FACTORS IDENTIFICATION USING THERMAL CAMERA</i>	529
Veronika Štekerová <i>RELIABILITY OF SELECTED BIOMETRIC IDENTIFICATION SYSTEMS</i>	534
Dai Tanabe, Shigeru Ichiura, Ayumi Nakatsubo, Takashi Kobayashi, Mitsuhiko Katahira <i>YIELD PREDICTION OF POTATO BY UNMANNED AERIAL VEHICLE</i>	540
Tomáš Tesař, Petr Vaculík, Rui Melicio, Victor M. F. Mendes <i>ZIGBEE PROTOCOL AND MICROCONTROLLER ON A PV SYSTEM FOR A MILKING CATTLE ROBOT</i>	547
Martin Tichý, Viktor Kolář, Miroslav Müller <i>STATIC AND DYNAMIC MECHANICAL PROPERTIES OF COMPOSITE FROM TYRE WASTE MICROPARTICLES/EPOXY RESIN</i>	553
Eva Urbanová, Vlastimil Altmann <i>USING MOTIVATIONAL SYSTEMS TO SORT WASTE EFFECTIVELY IN CZECH MUNICIPALITIES</i>	560
Lukáš Vašítek, Vladimír Mašán, Patrik Burg, Jakub Sikora <i>ENERGY RECOVERY OF WASTE FROM THE VINEYARD AND WINERY</i>	568
Ivan Vitázek, Radoslav Majdan, Rudolf Abrahám <i>ISOTHERMAL KINETIC ANALYSIS OF THE THERMAL DECOMPOSITION OF SPRUCE WOOD</i>	573
Jaromír Volf, Viktor Novák, Vladimír Ryženko <i>METHOD OF PATTERN RECOGNITION OF BIOCHIPS IN GENETIC ENGINEERING</i>	577
Jiří Vomáčka, Petr Novák, Josef Hůla, Zdeněk Kvíz <i>QUALITY ASSESSMENT OF SELECTED TILLAGE MACHINES FOR SECONDARY SOIL TILLAGE</i>	583
Zbyněk Vondrášek, Martin Polák <i>MEASUREMENT OF PERFORMANCE PARAMETERS IN SYSTEMS WITH FREQUENCY INVERTERS</i>	587



Zdeněk Votruba, Marek Pačes <i>ANALYSIS OF THE EFFICIENCY OF ELECTRONIC MULTIMEDIA EDUCATION AT THE TECHNICAL FACULTY</i>	593
Ling Sze Yee, Intan Fazreena Bt Mohd Redzuan <i>MATHEMATICAL DESCRIPTION OF NORMAL CONVECTIVE AND VACUUM DRYING PROCESS OF RAPESEEDS</i>	601
Mikhail N. Yerokhin, Otari N. Didmanidze, Nikolay Aldoshin, Ramil T. Khakimov <i>THE COMBUSTION PROCESS AND HEAT RELEASE IN THE GAS ENGINE</i>	607
Iwona Źabińska, Zbigniew Matuszak <i>COMMENTS ON THE DEVELOPMENT OF PROSUMER ENERGY IN POLAND</i>	612
Marcin Zastempowski, Andrzej Bochat <i>THE BEATER SHREDDING ASSEMBLY – CLASSIC AND NEW CONSTRUCTION</i>	618
Josef Zeman, Jan Sedláček <i>PROPERTIES OF FRESH AND FROZEN FISH SKIN AT CYCLIC LOAD</i>	622
Retta Zewdie, David Marčev, Martin Halberštát <i>AN ANALYSIS OF NOISE POLLUTANTS IN CITY SUBWAY TRANSPORTATION</i>	626



TORREFACTION UPGRADING OF PALM OIL EMPTY FRUIT BUNCHES BIOMASS PELLETS FOR GASIFICATION FEEDSTOCK BY USING COMB (COUNTER FLOW MULTI-BAFFLE) REACTOR

Dewi Agustina IRYANI^{1,6}, Agus HARYANTO^{2,6}, Wahyu HIDAYAT^{3,6}, AMRUL^{4,6}, Mareli TELAUMBANUA^{2,6}, Udin HASANUDIN^{5,6}, Sihyun LEE⁶

¹Department of Chemical Engineering, Faculty of Engineering, University of Lampung, Indonesia

²Department of Agricultural Engineering, Faculty of Agriculture, University of Lampung, Indonesia

³Department of Forestry, Faculty of Agriculture, University of Lampung, Indonesia

⁴Department of Mechanical Engineering, Faculty of Engineering, University of Lampung, Indonesia

⁵Department of Agro-industrial Technology, Faculty of Agriculture, University of Lampung, Indonesia

⁶Research and Development Center for Tropical Biomass, University of Lampung, Indonesia

⁷Climate Change Research Division, Korea Institute Energy Research, Republic of Korea

Abstract

The paper is focused on upgrading of Palm oil empty fruit bunches (EFB) pellets by using rapid torrefaction process. This study aims to evaluate the effects of torrefaction on the main energy properties of EFB pellets. The torrefaction process was conducted on range temperature of 250-350 °C by using COMB (Counter Flow Multy-Baffle) Reactor with 3 minutes of residence time. The properties of raw pellets and torrefied pellets such as the caloric value, energy density, ash content and mineral compositions, fixed carbon, volatile materials, lignin, holocellulose, extractives, and water immersion of pellets were analyzed in order to study the effect of torrefaction process on the pellets properties changes. The analytical results showed that the initiating heating value and carbon content of raw EFB pellet are 15.82MJ/kg, and 47.24 % increased up to 16.20 MJ/kg, 17.90 MJ/kg, 47.70 and 62,06 wt%*d.b*, subsecquentially for brown and black pellets. In case of moisture content, the initial EFB pellets has 9.21% decreased up to 8.97, and 7.80 %, subsecquentially for brown and black pellets. The obtained results revealed significant differences for all of main physical and energy properties of pellets. The torrefaction is able to upgrade the EFB pellets which having higher caloric value, carbon content, and lower water adsorption.. Therefore, the torrefied EFB pellets are potential to apply as a solid fuel for gasification feedstock or others thermal applications.

Key words: Pellet biomass, Palm oil solid waste, Torrefaction, Biomass pellets, Solid biofuel

INTRODUCTION

The production of palm oil in the world is dominated by Indonesia and Malaysia, with the account for around 85 to 90 percent of total global palm oil production. Indonesia is the largest producer and exporter of palm oil worldwide. Palm oil production in Indonesia has increased dramatically over the past decade. The data Indonesian Palm Oil Association (Gapki) stated that Indonesia would able produce 40 million tons of crude palm oil per year starting from 2020.

Production of crude palm oil consist of several stages from the sterilization of the EFB to the digestion, threshing and clarification of the oil cooking. In palm oil industry, to produce 1 ton of crude palm oil required five tonnes of fresh fruit bunches (FFB) (Hambali, & Rivai, 2017). Alongside palm oil production, the industry also produce several different form of waste as well, such as liquid palm oil mill effluent (POME), empty fruit bunches (EFB), mesocarp fibres, shell, and kernel . Presently, the solid waste such as fibres and shell are used as boiler fuel to produce high pressure steam for turbines in power generation of energy in palm oil mill. While, another solid waste such as EFB and shell are not being utilized.

In the palm oil mill with plantation, EFB mainly utilized as mulch or compost for palm oil plantation. The EFB which placed around the young palms is able to control weeds, prevent erosion and maintain the soil moisture (Oviasogie, *et al.*, 2010). However, in the mill with no plantation, the EFB is utilized properly. Whereas, in the palm oil mill, the utilization of EFB as a source of energy is avoided due to hydrophilic nature, high moisture content and low bulk density, low calorific value. Moreover, the EFB also contains high alkali metal especially potassium and silica (Stemann, *et al.*, (2013).



Therefore, in order to improve the fuel properties of EFB, the combination of pelletization and torrefaction were performed in order to alleviate the issues. Torrefaction was also known as mild form of pyrolysis that is carried out at temperatures range between 200 °C and 30 °C in a non-oxidising environment (Nyakuma, et al., 2015; Uemura, et al., 2011; Prins, et al., 2006). The purpose of torrefaction is for drying and partial devolatilization of biomass without affecting the energy content. Torrefaction is able to changes the properties to provide a better fuel quality for combustion and gasification applications (Prins, et al., 2006). In this study, the effects of torrefaction on the main energy and the properties of the EFB pellets such as the caloric value, ash content and mineral compositions, fixed carbon, volatile materials, lignin, holocellulose, extractives, and water immersion of pellets were evaluate. In addition, torrefaction process was conducted on the temperature range of 250-300 °C by using COMB (Counter Flow Multy-Baffle) Reactor with 3 minutes of residence time.

MATERIALS AND METHODS

2.1 Material

Palm oil (*Elaeis guineensis*) empty fruit bunch (EFB) pellets from one of pellet producer which is located in Tebing Tinggi, south Sumatra (Toba Hijau Sinergy Corp.) was used for torrefaction feedstock. Prior torrefaction and drying by using COMB Reactor, the samples are characterized by using several analyst methods such as the caloric value, carbon content, energy density, ash content and mineral compositions, fixed carbon, volatile materials, lignin, holocellulose, extractives, and water immersion of pellets. The calorific value of pellets were analyzed using a Parr bomb calorimeter according to ASTM D240. The functional groups of feedstock and products were analyzed by using a Fourier Transform Infrared (FT-IR) spectrophotometer model Perkin Elmer 2000. All of characterization method were conducted in order to understand the effect of torrefaction treatment into the material. Therefore, the raw and the torrefied pellet were dried at 105°C until constant weight.

2.2. Methods

2.2.1. Torrefaction Process

The experiment on the EFB pellets torrefaction was mainly focusing on the determination of process parameters to produce torrefied pellet (black pellet) with optimum yield. Prior the torrefaction experiment, EFB pellets were sieved to separate fine dusts and sorted/grouped based on pellet size, particularly its length. The sample of pellets was then torrefied in several experiment attempts, at least 5 runs for each biomass pellets were conducted prior to a successful black pellet production. The target temperature applied during torrefaction of pellets biomass was $\pm 300^{\circ}\text{C}$ with a column difference between column-in and column-top was $\pm 50^{\circ}\text{C}$. While, the other process parameters such as column pressure (flow rate), and feedstock feeding rate was varying depend on the feedstock characteristics such as pellet size, weight, and density. Prior to torrefaction process, feeding test was performed to determine the feedstock feeding rate during the torrefaction.

2.2.2. Characterization of Pellets

The moisture content of samples was determined through the air-dry and oven dry weights measurement using an analytical balance (Sartorius AZ6101, Göttingen, Germany) with a sensitivity of 0.01 g. The density of samples were evaluated by measuring their air-dry weight and volume. The composition of raw and torrefied pellets were determined following the method adapted from Datta, et al. (1981) with some modification. Before analyzing the composition of the EFB pellets as the raw material, a sample was extracted using ethyl alcohol to determine the wax content using a soxhlet extractor over 8 h at 80 °C. 150 mg of the de-waxed sample was then dried and treated with 1.5 ml of 72 wt% H₂SO₄ at 30 °C for 1 h. 42 ml of water was added to the treated sample and hydrolyzed for 1 h in an autoclave at 121 °C. The hydrolyzed sample was cooled, and then filtered and washed several times with hot water. The residue was noted as a Klason lignin (i.e. acid insoluble solid residue) and was dried at 105°C overnight. The composition of polysaccharide such as hemicellulose and cellulose were determined by using the method which adapted from Datta (1981). The raw and torrefied pellets were further characterized by several methods. Proximate analysis was performed following ASTM standard E-870-06. The ash content was determined by measuring the weight of sample before and after heating a 1.0 g sample at 575°C



for 5 h. The EAS Vario EL cube CHN elemental analyzer was used to measure the elemental composition of the solid products. The caloric value or energy content was determined by using Milne Bomb Calorimeter CAL2K ECO. In addition, for the purpose to identify the chemical structure and functional groups of the raw and torrefied pellets, the Fourier transforms infrared (FTIR) spectrometer (100 Perkin Elmer, MID IR spectrometer) was also performed by using the KBr disk technique (1 mg of sample/100 mg of KBr). The samples were recorded in the range of 400 - 4,000 cm^{-1} .

RESULTS AND DISCUSSION

The Appearance of torrefaction feedstock and products

Figure 1 shows the alteration colors of pellets before and after the torrefaction. The samples are denoted; **a** – Raw (un-torrefied) EFB pellets; **b** – Brown torrefied pellets; **c** – Black torrefied. The alteration color of torrefied EFB pellets from brown to black is mainly attributed to chemical compositions of biomass changes (Salca, et al., 2016).

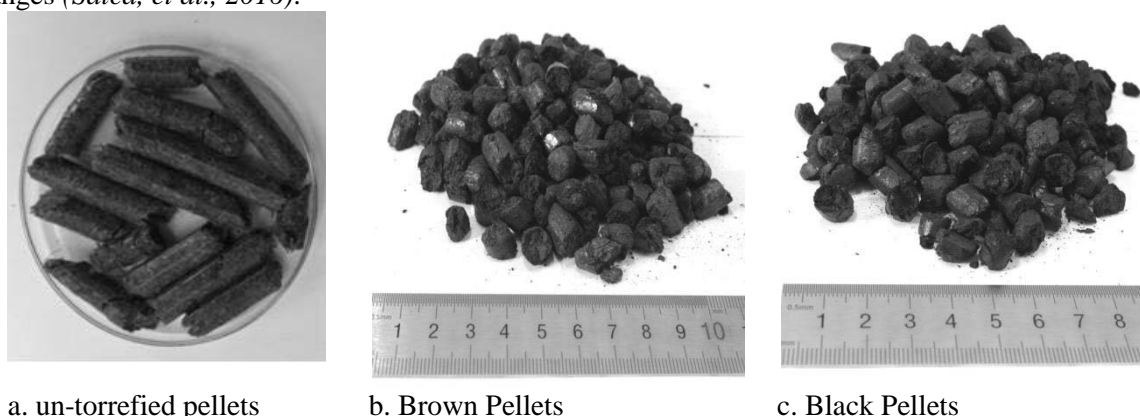


Fig.1 The appearance of raw and torrefied samples of EFB pellets

Ultimate and Proximate Properties

Table 1 presents the results of the ultimate and proximate values of raw EFB pellets and torrefied. The content of carbon (C) of the torrefied pellets was enhanced by 1.3 times higher than raw EFB pellets, while oxygen (O) and hydrogen (H) content were drastically decreases. The reduction of H and O content leads to the dehydration and deoxygenation reactions occurred during the treatment, thus significantly enhancing the heating value (HV) of the torrefied products. The values of atomic H/C and O/C ratios in raw sample were 0.14 and 0.96, respectively. After the torrefaction, the values were changed into 0.12–1.10 and 0.95–0.49, respectively. This result implies that the H/C and O/C values decreased due to the deoxygenation, dehydration and carbonization reactions occurred during the processes. The reaction occurs due to the oxygen-containing functional groups with high activity, moreover low activation energy were easy to crack or recombine to release the CO and CO₂ (Chen, et al., 2011). Moreover, as it was state in the previous paper (Prins, et al., 2006) that the solid fuel with low O/C ratios produce the higher gasification efficiencies than fuels with high O/C ratio. Furthermore, the biofuels with highly oxygenated are not perfect fuels for gasifiers from an exergetic point of view. Therefore, the modification of the properties of biomass are more attractive than gasifying these biomass as fuel directly (Prins, et al., 2006).

Tab. 1 Ultimate and proximate properties of raw and torrefied EFB pellets (% d.b)

Pellets Sample	C	H	N	O (diff)	MC	VM	FC	AC	HV (MJ/kg)
Raw	47.24	6.63	0.82	45.32	9.21	27.08	63.61	9.0	15.82
Brown	47.70	6.35	0.99	45.54	8.97	22.21	69.84	13.0	16.20
Black	62.06	5.76	0.63	30.96	7.81	18.05	72.84	11.0	17.90

d.b dry basis, diff. difference, VM volatile matter, FC fixed carbon, AC ash content, HV heating value



Chemical Composition Analysis Results of EFB Pellets

The chemical compositional changes were measured by gravimetric quantification of each component, as indicated in Tab. 2. The fraction of each component in the raw and torrefied samples is presented based on 100 g of the initial biomass. The result shows those hemicelluloses fractions are more easily degraded by thermal treatment compared with cellulose and lignin. The hemicellulose was easier to be decomposed than other polymers due to its branched structure and lower degree of polymerization (Iryani, et al., 2017). Differ with hemicellulose, the cellulose has a greater thermal stability due to their structure which is consist of a long glucose polymer without branches, linked by strong β -(1,4)-glycoside bonds. In case of lignin, the analytical result shows that, the content of lignin tends to increase after the torrefaction. The lignin content increased due to char, re-polymerization products, condensation reactions, and saccharide decomposition products of hemicellulose attached on the surface of the solid material which then leads the dark solid color. This result is in line with the previous research (Salca, et al., 2016) which was stated that the alteration of biomass color after torrefaction is related to the degradation of hemicellulose during the process.

Tab. 2 Chemicals composition of pellets (% d.b)

No	Sample	Hemicellulose	Cellulose	Lignin	others
1	Raw EFB Pellets	26	35	17	22
2	Brown Pellets	17	35	21	27
3	Black Pellets	15	35	31	19

Fourier Transforms Infra Red (FTIR) Results Analysis

The FTIR spectroscopy was used to investigate the change of chemical structure before and after the torrefaction. The spectral data provides a simple characteristic comparison between the raw and the torrefied pellets. All of the peaks were confirmed with literature data (Iryani, et al., 2017; Pastorova, et al., 1993). The FTIR spectral data showed a peak around 3300 cm^{-1} that is attributed to an -OH group. Comparing the FTIR spectra of the raw and torrefied pellets, the -OH group peak tend to decreased after the treatment. This result is in line with the data of MC presented in Tab. 1. This result indicates that the hydrogen-bonded -OH groups of hemicellulose of wood was gradually degraded. The peak changes were most apparent in black pellets. The peak in the range of $2928\text{--}2940\text{ cm}^{-1}$ is attributed to the aliphatic CH_n groups and also weakens indicating fragmentation and decomposition of the polymer chains. The peak in the range of $1720\text{--}1740\text{ cm}^{-1}$ represents C=O stretching vibrations of un-conjugated ketone, carbonyls, ester groups; and C=O of acetyl group in xylan (hemicellulose) become weaker after the torrefaction. The peak of the C-O-C aryl-alkyl ether linkages was detected around 1247 cm^{-1} . The peak of the β -glycosidic linkages between glucose in cellulose was observed in the range of $874\text{--}897\text{ cm}^{-1}$. The peaks around $1608, 1500,$ and 1408 cm^{-1} correspond to the C=C linkages of aromatic groups in the lignin. The peaks around 1608 and 1408 cm^{-1} suggest that lignin in the feed material was almost stable during the torrefaction and remained in the torrefied product.

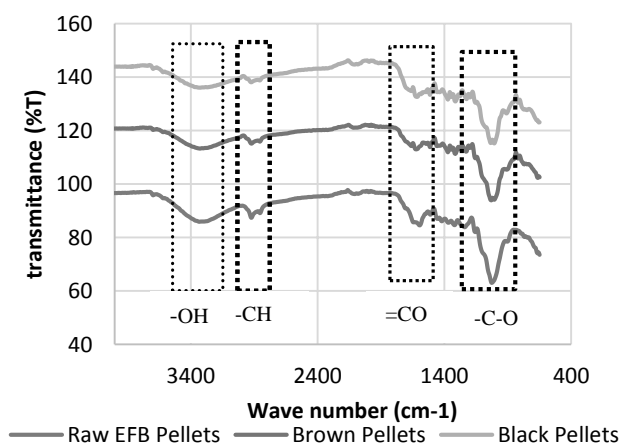


Fig 2. FTIR spectra of raw and torrefied Pellets



Hygroscopic property of EFB pellets

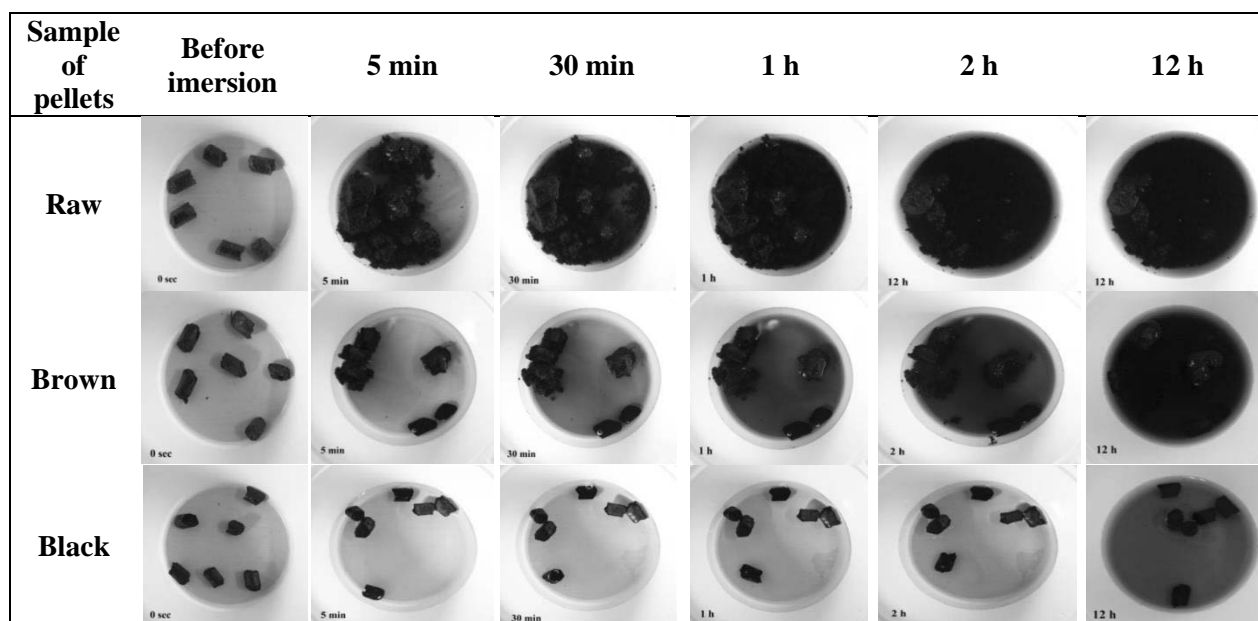


Fig. 3 Water absorption test of the raw and torrefied pellets.

The hygroscopic property of biomass pellets was tested by water absorption test (**Fig. 3**). The water immersion test which was conducted for 5 min, 30 min, 1 h, 2 h, and 12 h showed that the raw pellets fully disintegrated after 30 min. The Black pellets showed no significant disintegration even after 12 h test which is an advantage for long period storage of pellets. The results showed that the hygroscopic property of the raw pellets altered from hydrophilic into hydrophobic after torrefaction. The hydrophobic property of the torrefied pellet is one of their main advantage because moisture uptake by torrefied pellets is almost negligible even under severe storage conditions. It is generally known that the uptake of water by raw biomass is due to the presence of OH groups. Torrefaction produces a hydrophobic product by destroying -OH groups and causing the biomass to lose the capacity to form hydrogen bonds (*Pastorova, et al., 1993*). Due to these chemical rearrangement reactions, non-polar unsaturated structures are formed, which preserve the biomass for a long time without biological degradation, similar to coal (*Prins, et al., 2006; Chen, et al., 2011*).

The mineral Compositions Comparison of Raw and Torrefied Pellets

Tab. 3 presented the comparison of the mineral compositions of raw and torrefied pellets. The minerals compositions were analyzed using the X-ray fluorescence (XRF) analysis. The results confirmed the presence of K_2O , CaO , SiO_2 , Al_2O_3 and Fe_2O_3 in the sample the result shows that the torrefaction can be slightly reduced the mineral content such as SiO_2 , P_2O_5 , CaO and K_2O .

Tab. 3 The mineral composition of raw and torrefied pellets

Element	Unit	Raw	Brown Pellet	Black Pellet
MgO	%	1.21	1.35	1.44
Al_2O_3	%	0	10.06	10.36
SiO_2	%	10.45	0	0
P_2O_5	%	2.457	1.292	0
SO_3	%	3.57	2.418	2.34
Cl	%	6.60	6.62	5.97
K_2O	%	51.58	44.25	46.19
CaO	%	17.71	14.87	14.83
TiO_2	%	0.19	1.03	1.03



Cr ₂ O ₃	%	0.31	0.48	0.68
MnO	%	0.35	0.83	0,869
Fe ₂ O ₃	%	5.08	15.94	15.76
ZnO	%	0.733	0.19	0.18
Rb ₂ O	%	0.22	0.45	0.500

CONCLUSIONS

The torrefied pellets or the black pellets of EFB was successfully produced with good main energy properties. The results showed the reduction of moisture content after the torrefaction of biomass pellets. The improvement in the hygroscopic behaviour was also observed, showing a more hydrophobic product after torrefaction. The heating value of pellets remarkably increased after the torrefaction with COMB. The results proposed that torrefaction by using COMB technology could produce could produce friable, hydrophobic, and energy-rich fuel which ideal for gasification feedstock.

ACKNOWLEDGMENT

This study was supported by the Indonesian Oil Palm Estate Fund (*BPDPKS*) organize Palm Oil Grant *Research* Program 2019.

REFERENCES

1. Hambali, E. & Rivai M. (2017). The Potential of Palm Oil Waste Biomass in Indonesia in 2020 and 2030. *IOP Conf. Series: Earth and Environmental Science* 65 012050, 1-10.
2. Oviasogie, P.O., Aisueni, N.O., & Brown, G. E. (2010). Oil Palm Composted Biomass: A Review of the Preparation, Utilization, Handling and Storage. *African Journal of Agricultural Research* 5(13), 1553-1571.
3. Stemann, J., Erlach, B., & Ziegler, F. (2013). Hydrothermal carbonisation of empty palm oil fruit bunches: Laboratory trials, plant simulation, carbon avoidance, and economic feasibility, *Waste and Biomass Valorization* 4(3), 441-454.
4. Nyakuma B.B, Ahmad, A. Johari, A, Abdullah, A.T., & Oladokun, O. (2015). Torrefaction of Pelletized Oil Palm Empty Fruit Bunches, *Proceeding of The 21st International Symposium on Alcohol Fuels – 21st ISAF*, Gwangju, Korea.
5. Uemura, Y., Omar, W.N., Tsutsui, T., & Yusup S.B. (2011) Torrefaction of Oil Palm Wastes, *Fuel* 90, 2585-2591.
6. Prins. M.J, Ptasinski, K.J., & Jansen F.J.J.G. (2006). More efficient biomass gasification via torrefaction, *Energy* 31, 3458-3470.
7. Datta, R. (1981). Acidogenic Fermentation of Lignocellulose-Acid Yield and Conversion Of Components, *Biotech. and Bioeng.* 23(9): 2167-2170.
8. Salca, E. A., Kobori, H., Inagaki, T., Kojima, Y., & Suzuki, S. (2016). Effect of heat treatment on colour changes of black alder and beech veneers. *J. Wood Sci.* 62(4): 297-304.
9. Chen Q., Zhou J.S., Liu B., Mei Q.F., & Luo Z.Y. (2011). Influence of Torrefaction Tretreatment on Biomass Gasification Technology, *Energy Science & Technology* 56(14), 1449-1456.
10. Iryani, D.A., Kumagai, S., Nonaka, & M., Sasaki, K., Hirajima, T. (2017). Characterization and production of solid biofuel from sugarcane bagasse by hydrothermal carbonization. *Waste Biomass Valor.* 8:1941-1951.
11. Pastorova, I., P.W. Arisz, & J.J. Boon. (1993) Preservation of d-glucose oligosaccharides in cellulose chars. *Carbohydrate Research.* 248:151-165.

Corresponding author:

Dr. Eng. Dewi Agustina Iryani, Department of Chemical Engineering, Faculty of Engineering, University of Lampung, Indonesia phone: +6281293638980, e-mail: dewi.agustina@eng.unila.ac.id