

HALAMAN PENGESAHAN PUBLIKASI

- 1 a. Judul : Innovative design of soil pressure modeling test apparatus to determine
b. Bidang Ilmu : Teknik Sipil
- 2 Identitas Pelaksana
a. Nama Tim : L Afriani, I Adha and Setyanto
b. Nama Pengusul : Dr. Ir. Lusmeilia Afriani, D.E.A.
c. NIP : 0010056505
d. Pangkat/Golongan : Pembina Tk I/IVB
e. Jabatan Fungsional : Lektor Kepala
f. Fakultas/Program Study : Teknik Sipil
g. Bidang Keahlian : Geoteknik
h. No HP/Email : 08127203960/ lusmeilia.afriani@yahoo.com
- 3 Publikasi
a. Nama Publikasi : The International Conference Research Collaboration of Environmental Science. 12 Maret 2018, Universitas Airlangga Surabaya.
b. Vol/No./Tgg/ Hal. : IOP Conf. Series: Earth and Environmental Science, Vol 245, 2019, 012039
c. Tautan : <https://iopscience.iop.org/article/10.1088/1755-1315/245/1/012039>
d. DOI : doi:10.1088/1755-1315/245/1/012039
e. Repository : <http://repository.lppm.unila.ac.id/cgi/users/home?screen=EPrint%3A%3AView&eprintid=17101>
- 4 Penerbit : IOP Publishing Ltd.
Conferenceseries.iop.org/ees

Bandar Lampung, 5 Februari 2021

Penulis

Dr. Ir. Lusmeilia Afriani, D.E.A
NIP. 196505101993032008

Memgetahui
Dekan Fakultas Teknik
Universitas Lampung

Prof. Dr. Drs. Suharno, M.Sc
NIP. 196207171987031002

Menyetujui
Ketua LP2M
Universitas Lampung

Dr. Ir. Lusmeilia Afriani, D.E.A
NIP. 196505101993032008

| DOKUMENTASI LEMBAGA PENELITIAN DAN PENGABDIAN KEPADA MASYARAKAT UNIVERSITAS LAMPUNG | |
|--|------------------|
| TGL | 03/05/2021 |
| NO. INVEN | 93/P/B/1/FT/2021 |
| JENIS | Prosiding |
| PARAF | |

NOTICE: Ukraine: [Click here to read IOP Publishing's statement.](#)

Table of contents

Volume 245

2019

◀ Previous issue Next issue ▶

**The International Conference Research Collaboration of Environmental Science 12 March 2018,
Universitas Airlangga, Surabaya, Indonesia**

[Open all abstracts](#)

Preface

OPEN ACCESS 011001

The International Conference Research Collaboration of Environmental Science

+ [Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 011002

Peer review statement

+ [Open abstract](#) [View article](#) [PDF](#)

Papers

OPEN ACCESS 012001

The mapping of active waste banks based on Geographic Information System (GIS) as an effort for waste management in Surabaya City

T W C Putranto, F Hezim, N Citrasari and S B Santoso

+ [Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012002

Paving block with product 1 material as a substitute of portland cement and landfill mining residue

N Citrasari, K P A Pamungkassari, T W C Putranto and N Hamidah

+ [Open abstract](#) [View article](#) [PDF](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see [our Privacy and Cookies policy.](#)

OPEN ACCESS



The utilization of ceramic shard waste and landfill mining residue as a paving block material in the effort to extend landfill lifetime 012003

T W C Putranto, N F S Wigati and H P Pradana

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012004

The use of physically activated and soil composed bentonite as environment friendly for grounding resistance

Y Martin, D Permata, D Despa and Y L Wiyoto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012005

Improvement of campus environment quality: the feasibility study of the University of Lampung integrated waste management

I Kustiani and D Despa

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012006

Proximate characteristics of nano calcium in Blood Cockle (*Anadara granosa Liin*) shell from four different locations

S Widyastuti and D Evawati

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012007

Improvement of recycling-based municipal solid waste management in Padang City, West Sumatera, INDONESIA

S Raharjo, V S Bachtiar, Y Ruslinda, T Matsumoto and I Rachman

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012008

Application of GIS for the mapping of landslide-vulnerable areas by through android-based Analytical Hierarchy Process (AHP) method in Bantul Regency

Purbandini, R P Pratama and Susmiandri

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS 012009

Eco-cement production with alternative resources: recycling solution for shells ashes, organic husk ashes, organic waste ashes, and industrial sludge waste

This site uses Cookies. By continuing to use this site, you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012010

The design of Material Recovery Facilities (MRF)-based Temporary Disposal Site (TDS) at Universitas Airlangga campus C

N Citrasari, P S A Sitogasa, A L Burhan and N K Sari

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012011

The effectiveness of cellulolytic microbes and cow manure consortium for the composting technology of the garbage at the garden in Faculty of Science and Technology Airlangga University

T Surtiningsih and R Yusna

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012012

The planning of non-medical solid waste management at Universitas Airlangga Hospital

S Hariyanto, H N Rachmayani, N Citrasari, Z A Zalika and H M Faruqi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012013

The correlation of sulfur dioxide length of exposure to c-reactive protein level of gas station employees in Medan Amplas District, Medan

T K Intan, A P Tarigan and Hidayati

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012014

Carbon dioxide estimation at Lampung University based on vehicle volume

S N Khotimah, N A Mardhotillah, D Despa and N Arifaini

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012015

Factors associated decrease of forced vital capacity on gas station employees exposed to sulfur dioxide (SO₂)

N N Soeroso, T K Intan and M Ichwan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012016

Technical evaluation of leachate treatment plant at Klotok Landfill Kediri in 2017

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see

our Privacy and Cookies Policy. I. Ardiyanto



[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012017

Removal of nitrogen-phosphorus in food wastewater treatment by the Anaerobic Baffled Reactor (ABR) and Rotating Biological Contactor (RBC)

N Hendrasarie and M N Trilta

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012018

Tracking of Dissolved Effluent Organic Matter (dEfOM) in wastewater treatment plant by using fluorescence method

E N Hidayah and O H Cahyonugroho

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012019

Ammonia removal from Yogyakarta Domestic Wastewater (WWTP-SEWON) by microalgae reactor with CO₂ addition

A U Farahdiba, W Budiantoro and A Yulianto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012020

The potential of methane gas production at Klotok Landfill Kediri City

S Hariyanto, H H P Fatima, N Citrasari, S Sendari and M N Rasyidi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012021

Study of household solid waste generation and composition in Medan City, Indonesia; a case study in Medan Labuhan and Medan Tuntungan

H Khair, D D S Mutia and T Matsumoto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012022

Community based school improvement: a case study in Adiwiyata School at Malang

H A Syafrudie

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012023

Developing e-module of environmental health for gaining environmental hygiene awareness
This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.

S Sendari, R D R Roko, M L Ningrum, Y Rahmawati, H Rahmawati, T Matsumoto and I Rachman



[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012024

A Study on the need of entrepreneurship local content curriculum in Bandung Senior High School

R Susilana, L Dewi and M Ali

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012025

PBL Method under the environmental education in Indonesia analyzing the influence of PBL Method into the knowledge attitude and behavior aspects

I Rachman and T Matsumoto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012026

The development of Gestalt Hypnotherapy Training Module

B Soedarmadji

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012027

Implementation of environmental accounting in higher education solutions to improve the college's role in the implementation of corporate social responsibility

M Suhardiyah and Nurdina

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012028

Gender perceptions and adaptation strategies to climatic hazards-floods in rural areas of District Sialkot, Punjab, Pakistan

N Fitriani, M Aymen, N ul Huda, S M Tufail, S Amir and M Saud

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012029

The pattern of environmental education practice at schools and its impact to the level of environmental literacy of school-age student

M S Amin, A Permanasari and A Setiabudi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012030

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



A W Hasbiah and D Kurniasih

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012031

A systematic literature review of environmental concerns in smart-cities

I K Raharjana

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012032

Study on fluctuation of water consumption at education activity building (Universitas Pendidikan Indonesia as a case study)

E Afiatun, S Wahyuni and N Gustria

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012033

Identification of important efforts in urban river water quality management (case study of Cikapundung River, Bandung, Indonesia)

Y M Yustiani, A W Hasbiah, T Matsumoto and I Rachman

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012034

Environmental monitoring action for community surrounding garbage center in Indonesia

S Sendari, W Agustin, A S Faradyza, Y Rahmawati, H Rahmawati, T Matsumoto and I Rachman

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012035

Contractors' perception on construction waste management case study in the City of Bandar Lampung

A M Siregar and I Kustiani

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012036

Hortipark Lampung as environmental friendly urban horticulture concept in Lampung Province

K H Basuki, R Widyawati and S N Khotimah

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012037

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



The design of geographic information system determination of slum area to improve villages in supporting green and clean in Surabaya City using Fuzzy-AHP method

Purbandini, M Weridianti and S D Puspitasari

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012038

Household waste management to improve the community economy via waste bank in Medan City

D Sriyanto and T K Intan

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012039

Innovative design of soil pressure modeling test apparatus to determine the amount of soil compaction energy to dry density value

L Afriani, I Adha and Setyanto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012040

Analysis and projection of sea level rise in Medana Bay, North Lombok district

Tunas Gendewa Rancak, Suntoyo and Widi Agus Pratikto

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012041

Processing of plastic waste from Klotok Landfill Kediri City with thermal cracking method

A I Agusningtyas, N Citrasari, S Hariyanto and A F Maidi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012042

The bioconversion of vegetable waste extract from Osowilangun Central Market Surabaya into bioethanol using *Saccharomyces cerevisiae*

A Supriyanto, I Lestari, N Citrasari and S S Putri

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012043

Developing electrical energy saving in State University of Malang

S Sendari, H Elmunsyah, Muladi and A N Afandi

[+ Open abstract](#) [View article](#) [PDF](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see

[our Privacy and Cookies policy.](#)

012044

Development of a rotary kiln reactor for pyrolytic oil production from waste tire in Indonesia

M Syamsiro, M S Dwicahyo, Y Sulistiawati, M Ridwan and N Citrasari

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012045

In situ synthesis process of nanographene and its characteristic

M Z Fahmi, V Andriyani, M F Dzikri, T P Armedya, M Wathoniyyah, D L N Wibowo and A J Permana

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012046

Excavated waste characteristic from Semarang City landfill sites. Part 1: physical characteristic

B Lokahita, A M Abadi, I N Hutabarat, L A Sembiring, R T Andrianingsih, G Samudro, H S Huboyo, M Aziz and F Takahashi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012047

Small-scale production of biodiesel through transesterification process of waste or used cooking oil

A Agus and M Zahrul

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012048

Understandability and usefulness of news articles in explaining electricity generation from biomass: A comparative study on exact and non-exact science university students

D A Purwani, Z Mufrodi, A M Diponegoro, M K Biddinika and F Takahashi

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012049

Eco-efficiency and eco-innovation: strategy to improve sustainable environmental performance

W H Putri and N Y Sari

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012050

The role of waste compaction facility for reducing greenhouse gasses emission of waste transportation

M Chaerul and G M H Tompubolon

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see

[our privacy and Cookies policy.](#) [View article](#) [PDF](#)



OPEN ACCESS

012051

Effect of Solar Chimney and PCM cooling ceiling to the air flow inside a naturally-ventilated building

Suhendri

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012052

The geographic information system dashboard prototype of Brantas River, East Java

Taufik and B Nuqoba

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012053

The reduction of carbon dioxide emission at 3R Superdepo Sutorejo waste processing unit (TPS), Surabaya

T W C Putranto, S Hariyanto and S F Rifana

[+ Open abstract](#) [View article](#) [PDF](#)

OPEN ACCESS

012054

Economic analysis of the making of red brick without burning made from Foundry Sand and Paper Sludge waste

T W C Putranto and S E D F S Wati

[+ Open abstract](#) [View article](#) [PDF](#)

JOURNAL LINKS

[Journal home](#)

[Journal scope](#)

[Information for organizers](#)

[Information for authors](#)

[Contact us](#)

[Reprint services from Curran Associates](#)

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our [Privacy and Cookies policy](#).





The Electrochemical Society
Advancing solid state & electrochemical science & technology

241st ECS Meeting

ECS Plenary Lecture featuring
Prof. Jeff Dahn,
Dalhousie University

Register now!

The banner features a blue header with the ECS logo and tagline. Below this, the text '241st ECS Meeting' is prominently displayed. Underneath, it mentions 'ECS Plenary Lecture featuring Prof. Jeff Dahn, Dalhousie University'. A 'Register now!' button with a checkmark icon is positioned above a small image strip at the bottom. The image strip shows a cityscape with a large stadium (likely the Vancouver Olympic Stadium) and a portrait of Prof. Jeff Dahn.

This site uses cookies. By continuing to use this site you agree to our use of cookies. To find out more, see our Privacy and Cookies policy.



PAPER • OPEN ACCESS

Innovative design of soil pressure modeling test apparatus to determine the amount of soil compaction energy to dry density value

To cite this article: L Afriani *et al* 2019 *IOP Conf. Ser.: Earth Environ. Sci.* **245** 012039

View the [article online](#) for updates and enhancements.

You may also like

- [Reducing the negative impact of undercarriage systems and agricultural machinery parts on soils](#)
G G Parkhomenko, S A Voinash, V A Sokolova et al.
- [Experimental research of vertical movements and accelerations of the drum vibrations of the DM-617 vibratory roller during soil compaction](#)
I S Tyuremnov, A S Morev and D V Furmanov
- [Changes in soil bacterial community as affected by soil compaction, soil water content and plant roots](#)
L Ishak and P H Brown



The Electrochemical Society
Advancing solid state & electrochemical science & technology

242nd ECS Meeting

Oct 9 – 13, 2022 • Atlanta, GA, US

Abstract submission deadline: **April 8, 2022**

Connect. Engage. Champion. Empower. Accelerate.

MOVE SCIENCE FORWARD



Submit your abstract



Innovative design of soil pressure modeling test apparatus to determine the amount of soil compaction energy to dry density value

L Afriani, I Adha and Setyanto

Departement of Civil Engineering, Engineering Faculty, Lampung University, Indonesia.

Email: lusmeilia.afriani@eng.unila.ac.id

Abstract. A research in the laboratory about soil compaction is done using a hammer device, known as a standard proctor method and a modified proctor. Both methods use human strength to solidify the soil. This research is done well, because the compaction load and compactor height fall according to the research. Researchers tried to design and make a soil compactor with the same mold measure from standard proctor method but the compacting method use a hydraulic jack. So that the compressive strength and the energy can be measure to each layer. Thus the compacting energy can be measured and adjusted as needed. In addition, these results of compaction using a hydraulic jack will compare the soil compaction energy with standard proctor methods. The advantages of this new equipment can measure the compaction energy and dry density values. The research used modified press compactor test of 4 different pressures are 5 N/m²; 10 N/m²; 15 N/m² and 20 N/m². For every pressure conducted for 3 soil samples. After, the researcher will compare the soil compaction energy by standard proctor methode, new pressure test apparatus and with vehicle wheel pressure for soil compaction in the field.

1. Introduction

The urban infrastructure development project is to improve the economy of a region. To gate a good quality for the infrastruktur work, the planning and implementation construction must be suite to the required qualifications. A building that built on a flat area and has a solid soil will be easy to implement. However, the construction work is built in an unflat area and it will need excavation work and heaps (cut and fill). The soil compaction is a process in increasing the density of the soil by minimizing the distance between each particle, so it will cause an air volume reduction [1][2]. The removing air in the pores of the soil made the grains of the soil to become compressed. With this process, the soil compaction has expected to obtain stable soil and complete the technical requirements. To compac the soil material required several systems, for example, in the field is used a roller or compactor and in the laboratory using the proctor method. The density result depends on the water content of the soil material. The Compaction of the soil depends on mechanical manipulation, [3]. To obtain maximum dry density (MDD) require optimum water content (OMC) of the soil.

This research aims to develop science in civil engineering, especially in geotechnical sciences. Precisely this study using the capacity of the soil compaction test equipment as standard proctor method. A new compaction test apparatus developed and modified to obtain compaction energy from a compaction. This modified soil compacting test to determine the energy coming out of the modified soil compaction method. If the energy obtained from compaction using a standard proctor method



instrument is calculated by the amount of energy, but with this new modification, it is possible to know the amount of compaction energy. Another advantage is that it can shorten the time and energy, since the energy used can be measure during the soil compaction test. Surely, the private or government sector will require more accurate soil data. So far it only revolves around field investigations using sandcone test and standard proctor test and modified proctor in laboratory.

2. Research Methods

Proctor (1933) in Look, B.G., (2007) [4], and Hardiyatmo, HC. (2002) [5], has been observed that there is a definite connection between moisture content and solid dry volume weight for various soil types. The value of certain optimum moisture content obtained the value of the maximum dry volume weight (γ_{dmak}). The something between dry density (γ_d) with the weight of volume (γ_b) and moisture content (w) is shown in the equation of the energy required for compaction at standard compaction [5][6].

The manufacture of this compactor pressure tool is a modification of the laboratory standard compactor, the standard proctor method. This tool serves to solidify the soil, this compactor press is applied with a hydraulic jack that has a high compressive strength. The hydraulic system uses a manometer to be able to measure the pressure applied when the soil is under pressure. This means that while doing research, pressure energy can be measure. This tool is name modelling of modification compression test by pressure method. The study an availabel new design model of compression test used shown in Fig. 1.

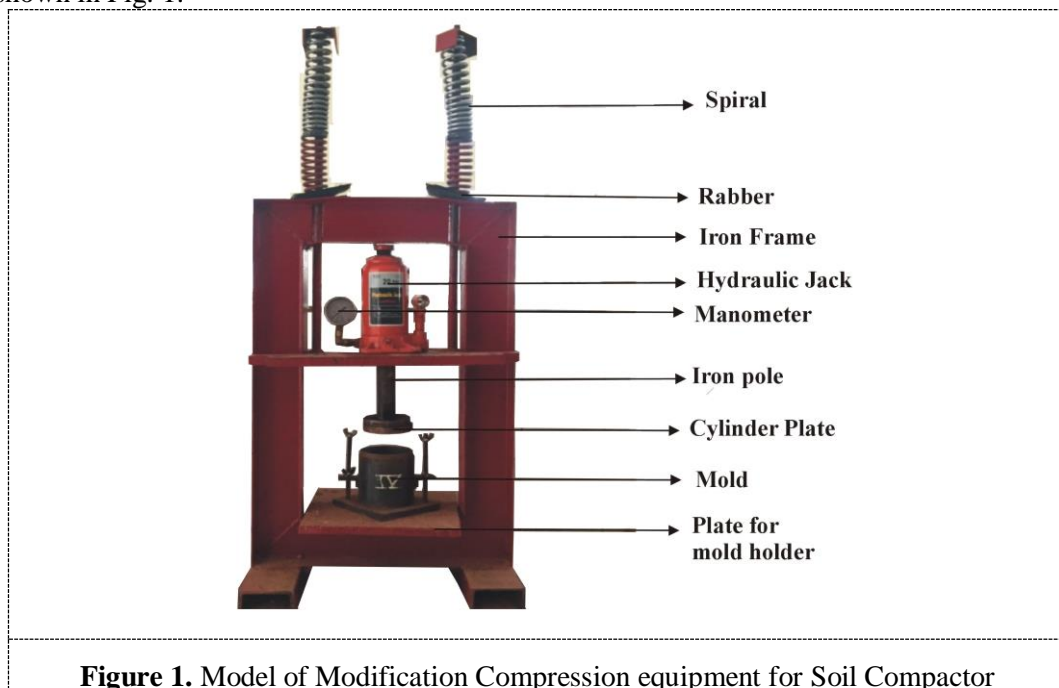


Figure 1. Model of Modification Compression equipment for Soil Compactor

The new equipment has 110 cm high, 40 cm long and 30 cm wide. The size is not too large and can only be used for research material by using fine-grained soil sample. The mould compactor that is a cylinder (mold), diameter 10.20 cm and 11.60 cm height. The soil sample in the mould is compacted with 2.50 kg a hammer and 30.50 cm a falling height. The soil is compaction 3 (three) layers with each layer 25 times the blow.

The first test is by standard proctor method test. After obtaining the optimum water content by proctor test, this water content is use in experiments with a new soil compactor. The preparation of the test sample is the same as the test system of standard proctor. The dry density after soil compaction

depends on the type of soil, moisture content, and energy provided by the hammer. Characteristics of soil density can be assessed by standard laboratory compaction tests.

A manual of the ground pressure tool is by pumping the hydraulic jack manually, the jack will push the plate down. Then the plate just below the jack will go down. When the jack is pumped the plate will press the soil inside the mold. When the soil has started compacted then the manometer will move, so it can know the amount of pressure received by the soil when reading the value on the manometer.

The first step of the study was to conduct a study of soil physical properties and research by standard proctor method to obtain maximum dry density (γ_{dmak}) and optimum water content (w_{opt}), [2][7]. After (γ_d) and (w) are obtained, the optimum water content becomes the reference as the water content used in the soil sample to be tested on a modified soil compacting test apparatus. After a soil samples containing optimum moisture content is ready and then the soil sample is fed into the mold divided into 3 layers. Each layer was press with the pressure already set. The pressure given for each specimen is 5 N/m^2 ; 10 N/m^2 ; 15 N/m^2 and 20 N/m^2 .

3. Result and Discussion

Soil compaction is an attempt to increase the soil strength with a system to provide the load or pressure on the soil surface. As a result, for air and water contents contained in the void between the soils particles will come out of the void. The soil compaction test aims to determine the maximum dry density and optimum water content. Soil samples were took by undisturbed samples for testing properties and disturbed samples for proctor and modified compression test (new apparel) tests. The water content test result of undisturbed sample (SBM) is 20.80%. The density value is 1.29 gr/cm^3 . The results of the soil analysis and plasticity index according to AASHTO Classification System and USCS, sample from borrow area of Sukabumi (SBM) is categorized sandy clay, The standard proctor procedure is performed according to ASTM D698 and AASHTO T90. While the soil samples from borrow area of Gedung Agung (GA) include the A-2-4 soil clusters of sandy clay soil and the soil is in accordance with the technical requirements as the preferred landfill, see figure 2.

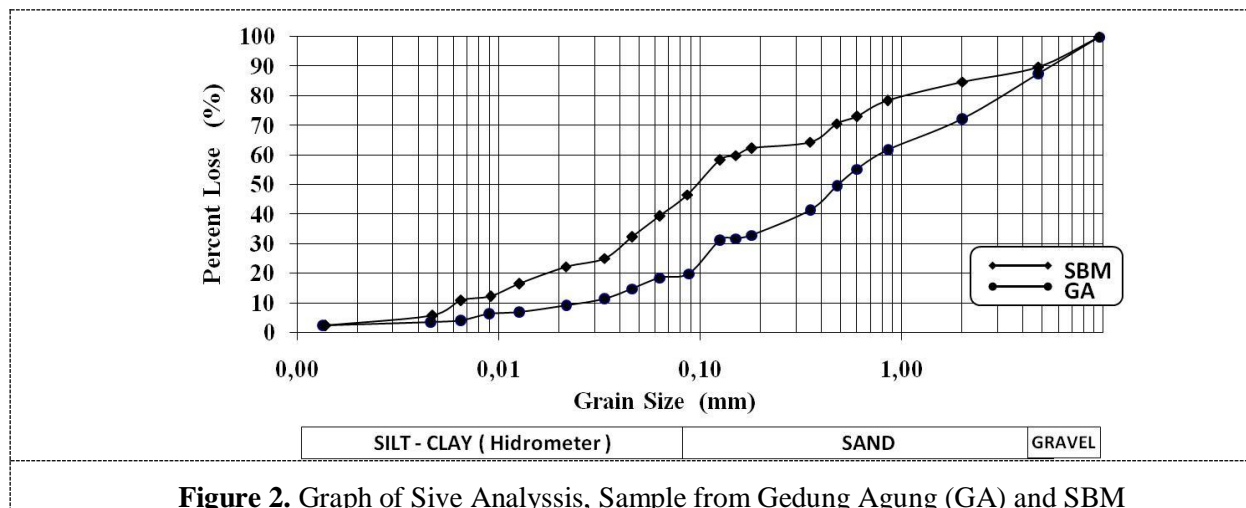


Figure 2. Graph of Sieve Analysis, Sample from Gedung Agung (GA) and SBM

In an experiment with a new test device, modification of compaction test by pressure method, dry density values are obtained between 1.31 gr/cm^3 - 1.55 gr/cm^3 for pressure 5 N/m^2 - 20 N/m^2 . Soil Data Result by Modification Compression Test, Sample of soil is from Sukabumi (SBM), see figure 3.

The result of standard proctor graphic for Soil Sample of Sukabumi (SBM) is the maximum dry density (MDD) value of 1.41 gr/cm^3 and optimum moisture content (OMC) of 26%. The Standard Proctor experiment has produced the maximum dry density and optimum water content but it can also

calculate the compaction energy using formula energy [6]. The result is as formulated of compaction Energy [6] equals to 6.03 ft-lb/ft³ or equal to 0.59 N/m². (≈ 288.72 kJ/m³).

Result of test undisturbed Soil sample from Gedung Agung got water content 20.80% and density is 1.62 gr/cm³. Energy of compactor is as formulated 56.25ft-lb/ft³ or 26.93 KJ/m³, equivalent to 2.70 N/m². In this case, the compacting energy has equalized by pressure, because it has multiplied by the area of contact of the compactor. Experiment with modification compaction of pressure method using hydraulic jack for pressure 5 N/m² - 20 N/m² obtained dry density between 1.59 gr/cm³ - 1.68 gr/cm³ see, Fig. 4 and table 1. All dry density value of both the soil have different values, this is due to different physical characteristics. The soil may be use as a heap or other civil engineering work as required.

Table 1. Soil Data Result by Modification Compression Test, Sample of soil is from Sukabumi Bandar Lampung (SBM) dan Gedung Agung (GA)

| Test Result of the sample from Sukabumi deposit (SKM) | | | | | Test Result of the sample from Gedung Agung Deposit (GA) | | | | | |
|---|----------|-------|------|-----------|--|---------|---------|-------|------|-----------|
| Pressure | Code | Water | Dry | Zerro Air | Pressure | Code | Density | Water | Dry | Zerro Air |
| 5 MPa | SBM_5_1 | 25,03 | 1,31 | 1,55 | 5 MPa | GA_5_1 | 1,92 | 20,91 | 1,59 | 1,69 |
| | SBM_5_2 | 23,66 | 1,31 | 1,59 | | GA_5_2 | 1,91 | 21,16 | 1,58 | 1,68 |
| | SBM_5_3 | 22,68 | 1,33 | 1,61 | | GA_5_3 | 1,94 | 20,47 | 1,61 | 1,70 |
| 10 MPa | SBM_10_1 | 25,76 | 1,48 | 1,54 | 10 MPa | GA_10_1 | 1,96 | 20,60 | 1,62 | 1,70 |
| | SBM_10_2 | 24,68 | 1,47 | 1,56 | | GA_10_2 | 1,95 | 20,06 | 1,63 | 1,71 |
| | SBM_10_3 | 26,11 | 1,48 | 1,53 | | GA_10_3 | 1,96 | 19,77 | 1,64 | 1,72 |
| 15 MPa | SBM_15_1 | 25,07 | 1,52 | 1,55 | 15 MPa | GA_15_1 | 1,99 | 20,74 | 1,65 | 1,69 |
| | SBM_15_2 | 24,34 | 1,53 | 1,57 | | GA_15_2 | 2,01 | 20,50 | 1,67 | 1,70 |
| | SBM_15_3 | 25,33 | 1,52 | 1,55 | | GA_15_3 | 2,02 | 20,40 | 1,68 | 1,70 |
| 20 MPa | SBM_20_1 | 23,54 | 1,56 | 1,59 | 20 MPa | GA_20_1 | 2,03 | 20,71 | 1,68 | 1,69 |
| | SBM_20_2 | 24,21 | 1,57 | 1,58 | | GA_20_2 | 2,02 | 20,26 | 1,68 | 1,71 |
| | SBM_20_3 | 25,36 | 1,55 | 1,55 | | GA_20_3 | 2,04 | 19,77 | 1,70 | 1,72 |

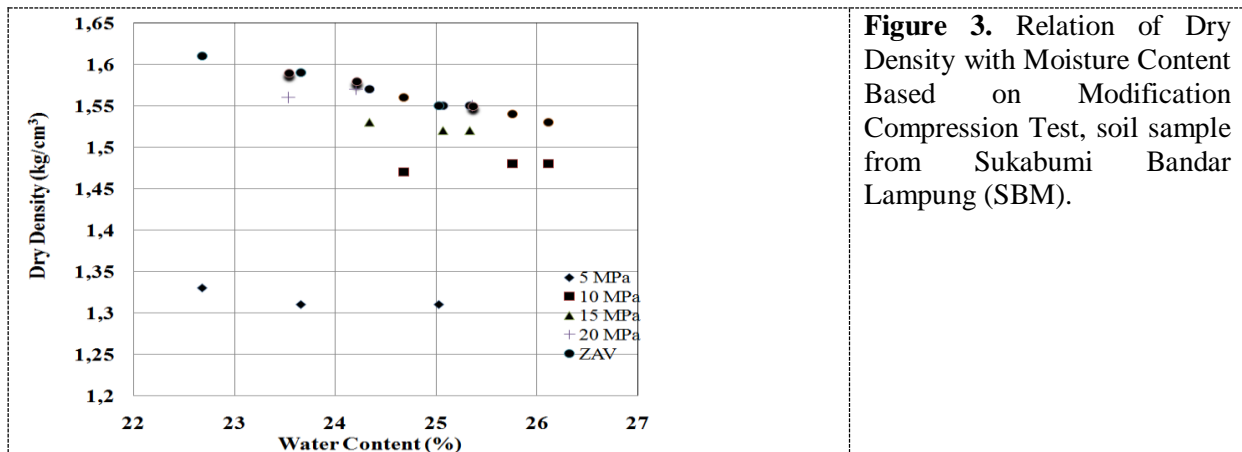


Figure 3. Relation of Dry Density with Moisture Content Based on Modification Compression Test, soil sample from Sukabumi Bandar Lampung (SBM).

In Figure 3 shows a graph of the experimental results from the Sukabumi stock using standard compaction proctor. It were obtained by maximum dry density of 1,37 gr/cm³. Testing using a new equipment with the same soil sample obtained results 1.37 gr/cm³ with the pressure as a compressive energy of 7 N/m².

Table 1 and figure 4 show that on the soil from the borrow area of Gedung Agung (GA) get the value of dry density of γ_{dmax} 1.38 gr cm³, this value is almost as large as the standard proctor compaction experiment and the new pressure tool is 1.37 gr/cm³. In the other side, the experiment with

the new tool obtained the amount of press 7 N/m². This means that with a pressure of 7 N/m² to get dry density value of 1.37 gr/cm³.

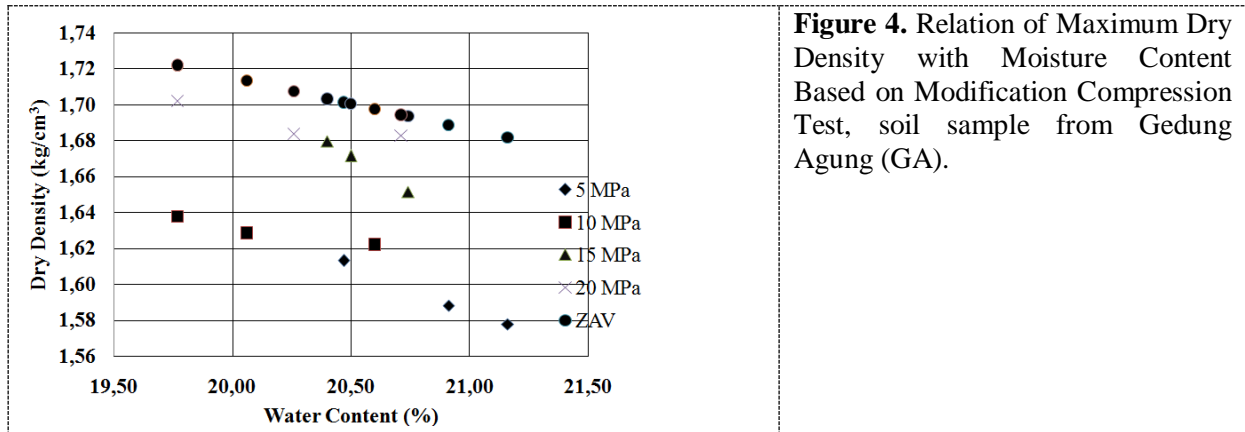


Figure 4. Relation of Maximum Dry Density with Moisture Content Based on Modification Compression Test, soil sample from Gedung Agung (GA).

Fig. 5 shows that, if the research with a pressure modification compression test is given at 9 N/m², it will get a dry density value of 1.62 gr/cm³. Whereas with the same sample, the dry density value is 1.58 gr/cm³ of the standard Proctor test. This means that experiments with standard proctor obtained dry density values less than the modified compression test. But the new test tool can determine how the amount of energy the compactor will be applied in the field. Thus contractors and consultants and public works department governments can choose the type of equipment to be used for compaction in the field.

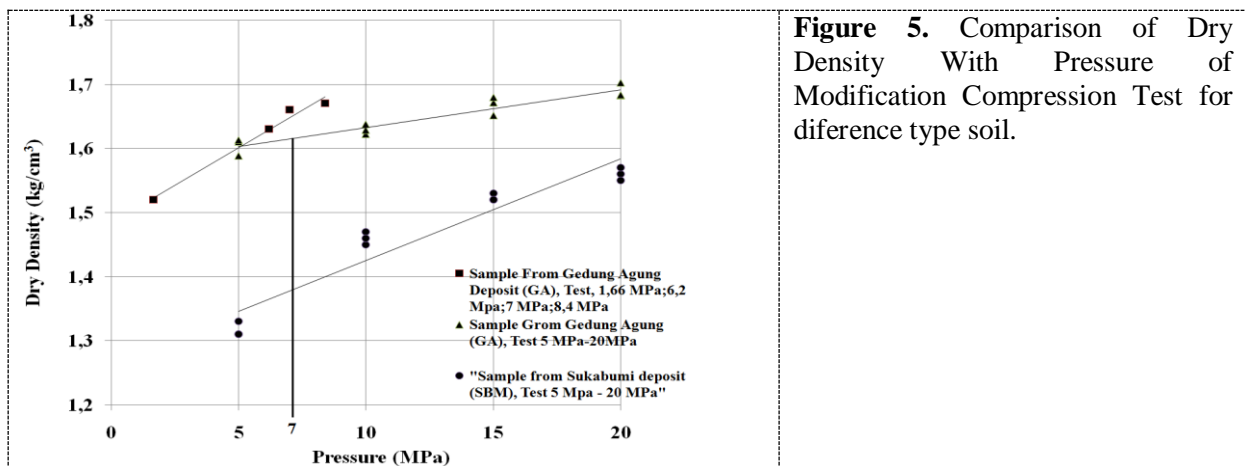


Figure 5. Comparison of Dry Density With Pressure of Modification Compression Test for difference type soil.

Another study, Hidayatullah, A. 2018 [8] has conducted a soil compacting study with an energy of 1.66 N/m² - 10 N/m², the results show that the high energy provided by the soil becomes solid, at a pressure limit of 10 N/m² to 20 N/m² is the maximum value pressure which can be applied to the ground. Because the soil can not be compacted again and the soil provides resistance to the load given. This is due to the shrinking of the soil pores and the shrinkage of the water content in the sample. But at a pressure of 10 N/m² the dry density value stops so that it can be stated that the maximum dry density can be attained at 8.40 N/m² pressure. Particle of sand contained in the sample of Gedung Agung (GA), it is sand within stable aggregate, because sand could be in three different forms in the soil: sand that is within stable aggregates, sand that is within unstable aggregates and can easily be redistributed, and sand that is free [9]. Therefore the sample of Gedung Agung is better than the Sukabumi sample; it is shown from the compaction test result where the dry density value is greater.

This study proves that the pressure value on the roller compaction machine in the field is almost close to the pressure on the modified compression test of 7 N/m². This means that the new test equipment is a recommendation for the selection of heavy equipment in the field.

4. Conclusion

At the 5 N/m² pressure test, the water content (w) is relatively smaller than the pressure of 10 N/m², 15 N/m² and 20 N/m² due to the great loss of water. Standard laboratory proctor test obtained the value of maximum dry density (γ_{dmax}) of 1.4 gr/cm³. When this value is converted to a modified compression test result or a new tool model with pressure using a hydraulic jack obtained a pressure value of 7 N/m². The larger the dry density (γ_d) will decrease the water content (w) and dry air void density value.

The soil samples from Gedung Agung (GA) obtain the following results soil can be classified as embankments selected for underground layers. In the standard laboratory proctor test obtained a maximum dry density value of 1.62 gr/cm³ and optimum moisture content of 20.8%. If this value is converted to a modified compression test in the laboratory, generate a pressure value of 9 N/m² obtained, this is shown in the Fig. 3. Pressure of 7 N/m² for regular embankment soil and 9 N/m² for the selected soil is the maximum pressure.

That mean, if water content increase to exceeds the optimal water content while the compaction energy is given continuously then what will occur is the value of the degree of soil density near zero air void. For this reason it is important to have good control over moisture content during compaction of soil layers in the field. A result of modeling the compaction metode with the use of hydraulic jacks as pressure and converted into energy quantities is very successful

5. Acknowledgment

This research has financed by University of Lampung Indonesia through research grant fund.

References

- [1] Afriani, L. 2014, "Soil Shear Strength", Graha Ilmu Publisher, 88p.
- [2] Bowles, Joseph E. 1970. "Engineering Properties Of Soils And Their Measurement", McGraw-Hill Book company, 187 p.
- [3] Craig, R.F. 1991. Soil Mechanics, translate, Erlangga Jakarta, 256p.
- [4] Look, B.G., 2007, "Handbook of Geotechnical Investigation and Design" Tables, Taylor & Francis Group, London, UK, 356 hal.
- [5] Hardiyatmo, HC. 2002. "Soil Mechanics", PT. Gramedia Pustaka Utama Publisher Jakarta, 208p.
- [6] Das B M. 2010. "Principles Of Geotechnical Engineering, Seventh Edition", 662p.
- [7] Gatot, S.B., 2011, "Soil testing in the laboratory, explanations & Guides" Graha Ilmu Publish, 123 hal.
- [8] Hidayatullah, A., Lusmeilia, A., Idharmahadi A., Setyanto, 2018, "Comparison of degree of soil density using pressure modification test tool method and standard proctor method" Graduated, Departement of Civil Engineering, Lampung University.
- [9] C. O. Ma´rquez,* V. J. Garcia, C. A. Cambardella, R. C. Schultz, and T. M. Isenhardt, 2004, "Aggregate-Size Stability Distribution and Soil Stability", SOIL SCI. SOC. AM. J., VOL. 68, MAY-JUNE, 68:725-735.



北九州市立大学
THE UNIVERSITY OF KITAKYUSHU



The International Conference Research Collaboration

“Improvement of City Environmental Quality”

Certificate of Participation

This certificate is awarded to

Dr. Ir. Lusmeilia Afriani, D.E.A.

Innovative Design of Soil Pressure Modeling Test Apparatus to Determine the Amount of Soil Compaction Energy to Dry Density Value

in recognition of your participation as an Oral Presenter in

The International Conference Research Collaboration

Universitas Airlangga, Surabaya, March 12th, 2018

Dr. Sucipto Hariyanto, DEA
Chairman Indonesia

Prof. Toru Matsumoto
Chairman Japan



Prof. Win Darmanto, M. Si., Ph.D.
Dean of Science and Technology Faculty

