

PAPER NAME

3. Amin_2019_IOP_Conf._Ser. _Mater._Sci._Eng._478_012038.pdf

AUTHOR

M. Amin

WORD COUNT

2481 Words

CHARACTER COUNT

12304 Characters

PAGE COUNT

6 Pages

FILE SIZE

974.3KB

SUBMISSION DATE

Sep 22, 2022 2:30 PM GMT+7

REPORT DATE

Sep 22, 2022 2:31 PM GMT+7

● 9% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 8% Internet database
- 6% Publications database
- Crossref database
- Crossref Posted Content database
- 4% Submitted Works database

● Excluded from Similarity Report

- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 10 words)
- Manually excluded sources
- Manually excluded text blocks

PAPER • OPEN ACCESS

Addition of feldspart minerals as a substitution material on ceramics clay manufacture

5 To cite this article: M Amin *et al* 2019 *IOP Conf. Ser.: Mater. Sci. Eng.* **478** 012038

View the [article online](#) for updates and enhancements.

You may also like

- 8 [Understanding the metastable states in K-feldspars](#)
R Kumar, M Kook and M Jain
- 7 [Selective excitation-emission spectroscopy of K-feldspars](#)
Zahra Essack, Sara Seager and Mihkel Pajusalu
- 3 [New lithologic classification method for tight sandstone reservoirs based on rock properties](#)
Xueqing Zhou, Zhansong Zhang, Chong Zhang et al.
- 4 [Log response characteristics of tight sandstone reservoirs](#)
Xueqing Zhou, Zhansong Zhang, Chong Zhang et al.



The Electrochemical Society
Advancing solid state & electrochemical science & technology

242nd ECS Meeting

Oct 9 – 13, 2022 • Atlanta, GA, US

Presenting more than 2,400
technical abstracts in 50 symposia



ECS Plenary Lecture
featuring
M. Stanley Whittingham,
Binghamton University
Nobel Laureate –
2019 Nobel Prize in Chemistry



Register now!



Addition of feldspart minerals as a substitution material on ceramics clay manufacture

M Amin¹, Y I Supriyatna¹, Y Hendronursito¹, D C Birawidha¹, Maulida², Latifah², and P Karokaro²

¹Research Unit for Mineral Technology – Indonesian Institute of Sciences, Jl. Ir. Sutami Km 15, Tanjung Bintang, Lampung Selatan

²Physics Department, Faculty of Mathematics and Natural Science – Lampung University

Email: muha047@lipi.go.id

Abstract. The use of clay minerals as the main raw material for pottery and sand additives has many weaknesses, among others, easy to crack, have high water absorption and low compressive strength. Therefore it is necessary to develop a better method of making traditional ceramics by providing additional materials such as mineral feldspar. Mineral feldspart can be used as a ceramic raw material because it is functional as filler and glass forming phases. Clay and mineral feldspart raw materials were analyzed using XRF method, followed by mixing with the composition of clay soil mixture as much as 65% compared to feldspart by 35%, printed with the shape of cube size 50x50x50mm. Drying in oven with temperature 110°C for 8 hours. Combustion in muffle furnace at temperature variation is 800°C, 900°C, 950°C and 1000°C and holding time is 2 hours, 3 hours, 4 hours and 5 hours. Test of compressive strength and porosity is done to see the physical properties of pottery ceramics and characterization by using XRF and XRD. The result of compressive strength test shows the temperature of 1000°C with 3 hours reaches the optimum value of compressive strength which is 9.52 Mpa, while the porosity value reaches the optimum point at heating temperature 1000°C with time of 5 hours that is equal to 16,19%. Characterization of XRF shows that ceramic pottery contains SiO₂ of 64.074%, and Al₂O₃ of 25.287% according to XRD characterization indicates the dominant phase formed by mineral quartz or silica oxide (SiO₂).

1. Introduction

Ceramic clay (earthenware) is a part of ceramics, this term in the modern context encompassing a very large inorganic material, ceramic clay containing nonmetallic and metallic elements made with various manufacturing techniques (the traditional ceramic is clay) that is burned at a certain temperature up to the chemically has been transformed into a permanent form. The mechanical properties of ceramics clay are usually a strong material, hard but fragile and easy to broken. Furthermore ceramic clay corrosion resistance, have low density and high melting point. The quality of ceramic clay affected by raw materials used and temperature heating [1]. Main raw material of ceramic clay are clay or clay minerals. This is according to Jone et.al (2015), the quality of pottery depends on the physical properties of clay minerals as the main raw material and sand as an additional raw material [2]. In the wet conditions clay mineral have plastic properties, but in a dry conditions become hard and when it burned become solid and strong [3]. The clay composed of oxide compounds such as SiO₂ and Al₂O₃ which are materials for the skeleton and form the ceramic body. Application of clay minerals as a main material for ceramic clay and sand as additives has many weaknesses, such as easy to crack, have high water absorption and have low compressive strength [4]. Therefore it is necessary to develop a better method of making traditional ceramics by providing additional materials such as mineral feldspart. Mineral feldspart can be used as ceramic material because it is functional as filler and glass forming [5]. Feldspart stone is the raw material needed for the production of ceramic tiles, household appliances, glazes, etc., because when it burned at temperature 1120-1300°C give effect of porosity change, bulk density and water absorption on pottery [6]. The industrial of ceramics and glass are the



main consumers of feldspart. In the manufacture of glass, feldspart used as a flux agent and as a source of alumina (Al_2O_3), alkali (Na_2O and K_2O), and silica [7]. When ceramic clay mixed with feldspart minerals are molded and burned the microstructure will be change from the pottery product to mullite ($3\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2$) and insoluble quartz crystal (SiO_2) that functioning into glass phase formation [8]. Based on the research of Indiani et.al (2009) the use of feldspart minerals in the manufacture of ceramics are useful as a melting agent to form glass phase at temperatures below 1100°C [9]. Research conducted by Rivai (2016), reported that after passing temperature 600°C physical and chemical clay will changes to be hard, solid and can't be destroyed by water [1]. This change is called ceramic change. This conclusion is reinforced by research conducted Ratri et.al (2008), at temperatures between $400\text{-}600^\circ\text{C}$ chemically bonded water and other substances in clay minerals will evaporate [4]. After the temperature more than 600°C clay will change into a solid, hard and permanent mineral. In the range of temperature 900°C the mullite phase will be formed. Mullite is a very stable compound that makes ceramic clay are hard, compact, and solid. So the ceramic clay has a high compressive strength and low absorption

2. Methode

In this research, raw material of clay used from Rejosari, Natar, Lampung Selatan, and the feldspart mineral from Nyukang Harjo, Lampung Tengah. Those raw materials were analyzed using XRF method as seen at the Table 1.

Table 1. XRF analysis results of the raw materials ceramic clay

Elements	Chemical Composition (%)	
	Clay	Feldspart
SiO_2	50.55	67.30
Al_2O_3	32.61	14.02
Fe_2O_3	2.43	2.24
K_2O	0.53	4.59
TiO_2	0.19	0.13
CaO	0.77	2.25
P_2O_5	0.14	3.20
NiO	0.12	0.020
SO_3	0.018	0.069
MnO	0.006	0.044
MgO	0.15	0.059
Cr_2O_3	0.003	0.015
SrO	0.002	0.020
PbO	0.004	0.006
CuO	0.001	0.007
Na_2O	1.05	0.005

Next, ceramic clay material is cleaned from impurities, dried in the oven with temperature 110°C or with sun for 3 hours and sieved with 20 pass mesh sifting.

Be pondered according to the mixing composition between clay and feldspart with ratio clay: feldspart = 65%:35%, stirring using mixer machine for 5 minutes with 10% water added from it weight. And printed with cube shape size $50 \times 50 \times 50 \text{mm}$. Drying in oven with 110°C temperature for 8 hours. Heating in the muffle furnace at temperature variation of 800°C , 900°C , 950°C and 1000°C and

the holding time 2 hours, 3 hours, 4 hours and 5 hours, It cooled and compressive strength tested, at the Civil Engineering laboratory in University of Lampung, The porosity test and characterization with XRF and XRD methods were performed in the laboratory of BPTM – LIPI Lampung.

3. Result and Discussion

The results of ceramic clay compressive strength testing can be seen at the graphic bellow in Figure 1.

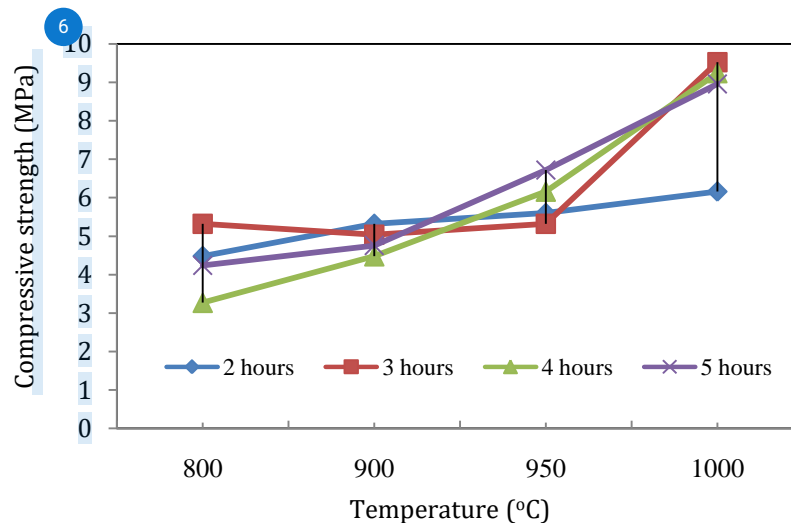


Figure 1. Graph of the comparison between compressive strength value to the temperature and heating time of ceramic clay


Testing porosity of physical properties in ceramic clay is to know the empty space in the sample. Yafie et.al (2014), reveals that shaft is an empty space or cavity formed in a compacting process that causes air to be trapped between powders during sintering [11]. The existence of a shaft inside a material will affect its mechanical properties. At 5hour variation time have porosity value respectively, at heating temperature 800°C with 5 hours is 20.85%, its value down at heating temperature 900°C with 5 hours is 20.43%, and back down at heating temperature 950°C with 5 hours is 18.89% and reached the optimum value at heating temperature of 1000°C 5 hours is 16.19%. The porosity value of an object greatly affects the value of its compressive strength. The more pores on the ceramic clay the strength of a material will decrease. The results of a study published by Gonggo et.al (2013) explain that the magnitude of the porosity value is due to the feldspart minerals that act as a fuser not yet completely fused to fill the cavities between the clay mineral granules [12]. Ceramic that have been heating at 900°C still contain minerals from feldspart. To reduce the porosity of ceramic required combustion at temperatures above 900°C, because the felders of feldspart begin to melt at a temperature of 900°C-1100°C. This is in accordance with this study, where the increasing temperature and heating time decreases the porosity percentage. Because there has been a good melting process to fill other pore spaces on ceramic, although the melting process has not been perfect.

Ceramic clay XRF characterization as performed to determine the amount of oxide contained in the sample in percent are presented in Table 2.

Table 2. X-ray fluorescence characterization results of ceramic clay with some variations of temperature and heating time.

Elements (%)	Heating Time (°C)				
	800 (3 hours)	900 (3 hours)	950 (3 hours)	1000 (3 hours)	1000 (5 hours)
SiO ₂	61.169	58.218	60.066	60.162	64.074
Al ₂ O ₃	29.138	30.661	28.918	27.901	25.287
Fe ₂ O ₃	4.863	5.208	5.252	5.732	5.358
TiO ₂	0.732	0.742	0.779	0.732	0.719
CaO	0.641	0.961	1.182	0.681	0.635
K ₂ O	2.695	2.971	2.958	2.532	3.114
P ₂ O ₅	0.466	0.477	0.488	0.481	0.469

Based on the analysis in Table 2, it is also known that the ratio of the highest compound content of SiO₂ and Al₂O₃ this proves that there is no significant phase change. For at each combustion temperature with 3 hours, the percentage of both compounds is in cosmetic numbers. At 800°C temperature the amount of SiO₂ and Al₂O₃ is compounds 90.307%, at 900°C the amount of SiO₂ and Al₂O₃ is compounds 88.899%, at 950°C the amount of SiO₂ and Al₂O₃ is compounds 88.984% and at 1000°C the amount of SiO₂ and Al₂O₃ is compounds 89.361%. The high compounds of Fe₂O₃, in the range 4.863%, 5.208%, 5.252% and 5.358% are the oxide that gives red color when heating as evidenced in the reddish sample [12]. This is also supported by the XRD characterization results in the sample.

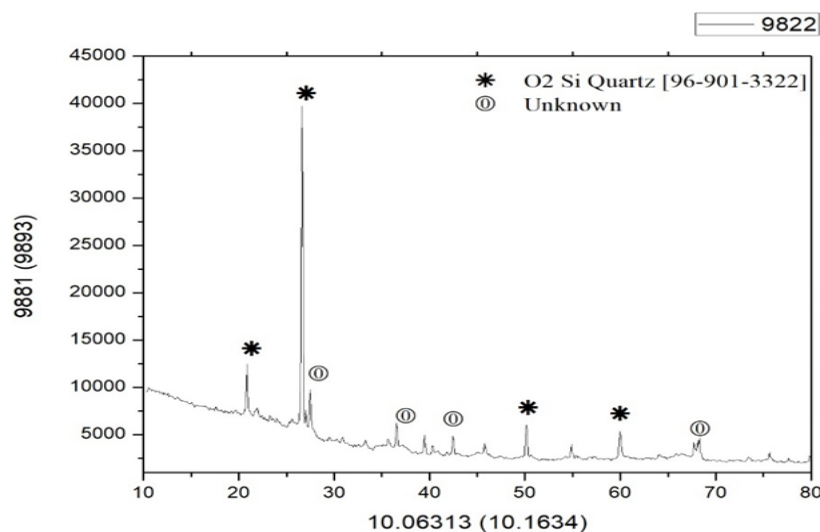**Figure 2.** XRD Graph of ceramic clay with heating temperature 1000°C 3 hours

The results of XRD characterization in temperature variation 1000°C 3 hours indicating that the dominant phase formed just silica oxide (SiO₂) with the highest peak at $2\theta = 26.64^\circ$. The research of Ratri et.al (2008) also expressed opinion that regarding the formation of a mullite phase formed above a temperature of 1000°C [4]. But in this study, ceramic clay heating at 1000°C 3 hours only formed silica oxide. Based on the XRD graph, it is known that the mullite phase (2Al₂O₃.2SiO₂) ceramic clay heating at 1000°C 3 hours has not been formed. The glass phase is formed more by the feldspar grains ceramic clay will decrease on 1100°C temperatures. The pores remained small the at 1150°C, because

the silica granules occurs by causing more glass phase. At 1200°C temperature, the ceramic body matures with a porosity almost toward zero. In the pseudomorphic form of the feldspar grains can be seen a large number of mullite needles formed resulting from alumina diffusing into the clay through the glass phase.

4. Conclusion

The value of the optimum compressive strength occurs at a temperature of 1000°C with 3 hours time is 9.52 MPa. This is supported by the porosity value of 17.032%. Because the higher of compressive strength value is that the lower of the porosity percentage. Based on of XRD analysis result that the heating optimum at 1000°C with 3 hours and at 1000°C with 5 hours mullite phase ($2\text{Al}_2\text{O}_3 \cdot 2\text{SiO}_2$) not formed it just inversion change from low quartz to high quartz.

Acknowledgments

The authors are grateful the Head of BPTM - LIPI who has allowed the implementation of this research and provide support in the form of licensing the use of facilities and infrastructure needed in this study.

References

- [1] Rivai M and Hartono S B 2016 *Jurnal TRAKSI* **16** 2
- [2] Jone Y, Utamakno L, and Cahyono Y D 2015 *Jurnal Seminar Nasional Sains dan Teknologi Terapan III*
- [3] Winarno T 2016 *Jurnal Teknik* **1** 37
- [4] Ratri A K, Sriatun, and Darmawan A 2008 *Jurnal Kimia Sains dan Aplikasi* **11** 3
- [5] Ajayi B A and Owoeye S S 2012 *International Journal of Science and Research (IJSR)* **3** 11
- [6] Radomír Sokolář and Lucie Vodová, 2014 *International Journal Of Engineering And Science* **4** 10
- [7] André C S, Sílvio D C, Débora N S, Elenice M, and Schons S 2018 *Journal of Material Reasecht and Technology* **2** 5
- [8] Matthew G O and Fatile B O 2014 *Research Journal of Recent Sciences* **3** 9
- [9] Indiani E, Ayu N, and Umiati K 2009 *Jurnal TELKOMNIKA* **7** 2
- [10] Alaa S and Wijaya D 2015 *Jurnal Fisika* **1** 1
- [11] Yafie M S and Widyastuti 2014 *Jurnal Teknik Pomits* **3** 1
- [12] Gonggo S T, Edyanti F, and Suherman 2013 *Jurnal Akademika Kimia* **2** 2

● 9% Overall Similarity

Top sources found in the following databases:

- 8% Internet database
- Crossref database
- 4% Submitted Works database
- 6% Publications database
- Crossref Posted Content database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	repository.lppm.unila.ac.id	2%
	Internet	
2	Eastern Institute of Technology on 2021-08-23	2%
	Submitted works	
3	previews.americangeosciences.org	<1%
	Internet	
4	L Jordá-Bordehore, L Alejano, R Tomás, S C Loaiza et al. "Determinatio...	<1%
	Crossref	
5	M Amin, Y I Supriyatna, K Isnugroho, Sudiby, R Septiana, Syafriadi. "...	<1%
	Crossref	
6	osamat.ee	<1%
	Internet	
7	N M Trindade, M C S Nunes, S L Dardengo, A O Silva, R Kunzel, C Ulsen,...	<1%
	Crossref	
8	iopscience.iop.org	<1%
	Internet	



coursehero.com

Internet

<1%

● Excluded from Similarity Report

- Bibliographic material
- Cited material
- Manually excluded sources
- Quoted material
- Small Matches (Less than 10 words)
- Manually excluded text blocks

EXCLUDED SOURCES

M Amin, Y I Supriyatna, Y Hendronursito, D C Birawidha, Maulida, Latifah, P K... 48%
Crossref

EXCLUDED TEXT BLOCKS

The 2nd Mineral Processing and Technology International ConferenceIOP Publishi...
School of Business and Management ITB on 2019-11-21

Addition of feldspart minerals as a substitution material onceramics clay manufac...
repository.lppm.unila.ac.id