


ISBN: 978-4-909106025 C3051

# GEOMATE Proceedings

20-22 November 2019

Hotel Continental  
Fuchu Tokyo Japan

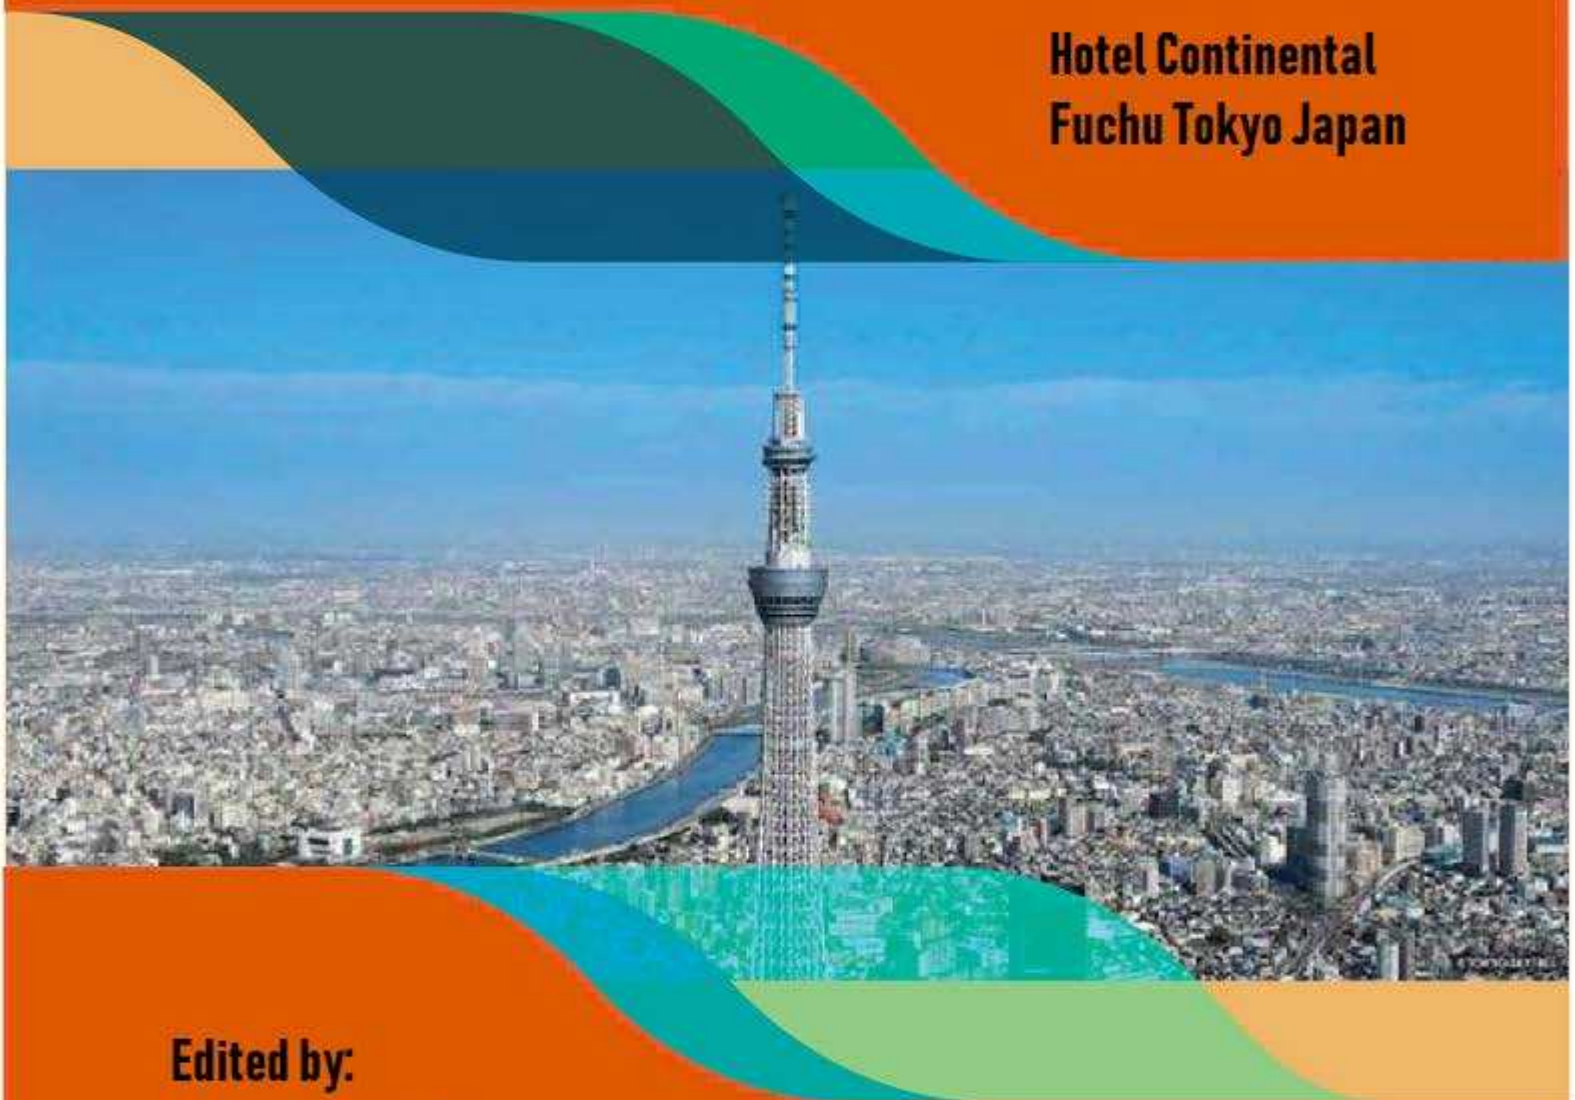

Edited by:  
Zakaria Hossain  
Shinya Inazumi  
Jim Shiau





# INTERNATIONAL CONFERENCE GEOMATE

20 November 2019

## OFFICIAL RECEIPT

### **GEOMATE 2019 Conference Registration Fees**

Paper ID Number: 9371

Received from: Mr. Andius Dasa Putra

Email: andius.dasaputra@eng.unila.ac.id

Amount: Authors/Participants/(Paper of 6 page limit) (Amount: 600.00 USD, Number of Participants: 1)

Subtotal:

Tax:

Total: 600.00

Sincerely yours,



Dr. Zakaria Hossain, Conference Chairman  
9<sup>th</sup> International Conference on Geotechnique, Construction Materials and Environment,  
Professor, Graduate School of Bioresources, Mie University 1577 Kurima Machiya-cho, Tsu-city,  
Mie 514-8507 Japan, E-mail: [editor@geomate.org](mailto:editor@geomate.org)  
Tel & Fax: +81-59-231-9578  
Conference URL: <http://www.geomate.org/>

### **Editor-in-Chief International Journal of GEOMATE**



Scopus



Crossref



EBSCO



GIF

ISSN: 2186-2982 (Print), 2186-2990 (Online), Japan



## PUBLISHING AGREEMENT

Dear Sir,

I am required to obtain copyright of papers from authors for the term of copyright and I would be grateful if you would confirm your acceptance by signing and returning the agreement below. I will not withhold permission for any reasonable request from you to publish any part of this paper in connection with any other work by you, provided the usual acknowledgements are given regarding copyright notice and reference to the original publication.

If it is appropriate, the author's employer may sign this agreement and, in any event, the employer may reserve the right to use the paper internally or for promotional purposes only by indicating to this agreement.

The author warrants that the manuscript is the author's original work and has not been published before (if excerpts from copyrighted works are included, the author will obtain written permission from the copyright owners and show credit to the sources in the manuscript). The author also warrants that the article contains no libellous or unlawful statements and does not infringe on the rights of others.

If the work was prepared jointly the author agrees to inform co-authors of the terms of the agreement and to sign on their behalf.

Dr. Zakaria Hossain, Conference Director

Name of Conference:

**The International Conference of GEOMATE 2019**

I hereby assign the copyright to my paper entitled,

**DEFORMATION ON THE EMBANKMENTS DUE TO SLAKING PHENOMENON AND ITS EFFORT TO ELIMINATE**

+note -

if the paper is rejected, this assignment is null and void

Name of author: Andius Dasa Putra

Paper ID No.: 9371

Organization: University of Lampung

Address: Jl. Prof. S. Brojonegoro No 1 Gedong Meneng Bandar Lampung Indonesia 35145

Tel. & Fax.: +62-721-704947

Signature: \_\_\_\_\_

Date: June 14<sup>th</sup>, 2019

Please send this form duly filled and signed together with your manuscript to:

Dr. Zakaria Hossain, Conference Director

Professor, Division of Environmental Science and Technology

Graduate School of Bioresources, Mie University, 1577 Kurima Machiya-cho

Tsu-city, Mie 514-8507, Japan, E-mail: [zakaria@bio.mie-u.ac.jp](mailto:zakaria@bio.mie-u.ac.jp)

Tel: +81-59-231-9578, Fax: +81-59-231-9591

GEOMATE 2019 TOKYO, JAPAN  
GEOTECHNIQUE, CONSTRUCTION MATERIALS AND ENVIRONMENT

PROCEEDINGS OF THE NINTH INTERNATIONAL CONFERENCE – GEOMATE 2019  
GEOTECHNIQUE, CONSTRUCTION MATERIALS AND ENVIRONMENT, TOKYO, JAPAN  
20-22 NOVEMBER, 2019

# **Geotechnique, Construction Materials and Environment**

*Edited by*

**Prof. Zakaria Hossain**

*Department of Environmental Science and Technology  
Graduate School of Bioresources  
Mie University, Japan*

**Prof. Dr. Shinya Inazumi**

*Department of Civil Engineering  
Shibaura Institute of Technology, Japan*

**Dr. Jim Shiau**

*School of Civil Engineering and Surveying  
University of Southern Queensland, Australia*



THE GEOMATE INTERNATIONAL SOCIETY

Copyright © 2019 by The GEOMATE International Society

All rights reserved. In principle, no part of this publication or the information contained herein may be reproduced in any form or by any means, translated in any language, stored in any data base or retrieval system, or transmitted in any form or by any means without prior permission in writing from the publisher.

Disclaimer: The editors and the publisher have tried their best effort to ensure the integrity and the quality of this publication and information herein. However, they give no warranty of any kind, expressed or implied with regard to the material contained in this book, and will not be liable in any event for the consequences of its use.

Published by:  
The GEOMATE International Society  
Tsu city, Mie, Japan  
E-mail: [society@geomate.org](mailto:society@geomate.org)  
<http://www.geomate.org/>

ISBN Number: 978-4-909106025 C3051

## Table of Contents

	Preface	xviii
	Organization	xix
<b>ID</b>	<b><i>Keynote Papers</i></b>	<b>1</b>
1k	THE INFLUENCE OF TEMPERATURE AND MOISTURE ON THE BEHAVIOR OF FINE-GRAINED SOILS Xingyi Wu, Junping Ren and Sai K. Vanapalli	<b>2</b>
2k	COMPRESSION BEHAVIOR OF ULTRA-SOFT SOIL WITH AND WITHOUT PREFABRICATED VERTICAL DRAIN Suksun Horpibulsuk, Dong Huy Ngo, Apichat Suddeepong, Menglim Hoy, Artit Udomchai, Prajueb Doncommul, Runglawan Rachan and Arul Arulrajah	<b>12</b>
3k	EVALUATION OF THE RELATIONSHIP BETWEEN THE DECREASE IN THE TENSILE LOAD OF GROUND ANCHORS AND GEOLOGICAL CONDITIONS Mitsuru Yamazaki and Toshinori Sakai	<b>19</b>
	<b><i>Technical Papers</i></b>	<b>25</b>
<b>ID</b>	<b><i>Geotechnique</i></b>	<b>26</b>
9121	EVALUATION OF AUXILIARY METHOD IN TUNNEL CONSTRUCTION ON MIXED FACE (SOIL-ROCK) CONDITION Fahmi Aldiamar, Susy K. Ariestianty, Yusrizal and Wida Nurfaida	<b>27</b>
9122	EVALUATION OF RELATIONSHIP BETWEEN DECREASE IN TENSILE LOAD OF GROUND ANCHORS AND THE GEOLOGICAL CONDITIONS Mitsuru Yamazaki and Toshinori Sakai	<b>34</b>
9124	A COMPARATIVE STUDY ON THE PERFORMANCE OF SOIL NAIL AND MICROPILE IN SOIL SLOPE STABILIZATION USING SPENCER'S METHOD Lee Li Yong, Endene Emmanuel and Vivi Anggraini	<b>40</b>
9125	PORE-STRUCTURAL PARAMETERS OF VOLCANIC ASH SOIL: COMPARISON BETWEEN NON-DESTRUCTIVE AND INDIRECT METHOD Arjun Baniya, Akihiro Matsuno and Ken Kawamoto	<b>46</b>
9127	PROPERTIES AND LIQUEFACTION RISK ON BULK CARGO CARRYING BUKIT GOH, KUANTAN BAUXITE; IN ACCORDANCE WITH IMSBC CODE Muzamir Hasan, Masitah Abdullah, Muhammad Fat-hi Al Juwaini Pahrol and Masayuki Hyodo	<b>52</b>
9128	EFFECT OF CONSTRUCTION SEQUENCE ON THE PERFORMANCE OF GEOTEXTILE TUBES IN A CONTAINMENT BUND J.W. Koh, K.E. Chua, H.M. Audrey Yim, S.H. Chew, and Z.X. Gng	<b>57</b>

9364	EVALUATING HYDRAULIC AND MECHANICAL PROPERTIES OF NATURAL PREFABRICATED VERTICAL DRAIN (PVD) ON A LABORATORY SCALE Dea Pertiwi and Maulana Iqbal	354
9367	EVALUATION OF ELASTIC AXIAL STIFFNESS REFERS TO TENSILE STRENGTH TESTING OF GEOGRIDS AND NON-WOVEN GEOTEXTILES Dea Pertiwi and Fahmi Aldiamar	360
9370	NUMERICAL AND ANALYTICAL STUDY OF STABILITY OF AN EXISTING MULTI-LAYERED ROADSIDE SLOPE WITH THE VALIDATION BY A PHYSICAL MODEL Nishat Nawal, Monjurul Mozid, Md. Ibrahim Khalil Porag, S.K. Tamheedul Islam and Hossain Md Shahin	366
9371	DEFORMATION ON EMBANKMENTS DUE TO SLAKING PHENOMENON AND ITS COUNTERMEASURE Andius Dasa Putra and Mamoru Kikumoto	372
9377	SEDIMENT FLOW CHARACTERISTICS AROUND CYLINDRICAL STRUCTURE REGARDING SEABED EFFECTIVE STRESS RESPONSE Anh Quang TRAN, Kinya MIURA, Tatsuya MATSUDA and Taiki MURAKAMI	378
9385	CARACTERIZATION OF CEMENTITIOUS BACKFILL WITH HIGH SULPHUR CONTENT Daniela Ionescu, Joe Petrolito and David Morton	384
9401	INFLUENCE OF CHEMICAL PROPERTIES AND MINERAL CONTENTS ON SANDSTONE STRENGTH Haryati Awang, Nor Hayati A Hamid and M Idris Ali, Noram I Ramli, Ramadhansyah PJ	389
9407	NUMERICAL ANALYSIS ON MECHANISM OF DEWATERING AS A MITIGATION METHOD AGAINST LIQUEFACTION IN SOFT GROUND Yukihiro Morikawa, Ho Cho	395
9419	NUMERICAL SIMULATION OF THE SETTLEMENT BEHAVIOUR OF PLANAR AND 3D GEOGRID REINFORCED SAND BED Femy M.Makkar, Sreya M.V., Chandrakaran S. and Sankar N.	401
9424	PARTICULATE MECHANICS PARAMETERS FOR GEOTECHNICAL AND AGRICULTURAL ENGINEERING APPLICATIONS Joash Bryan Adajar, Irene Olivia Ubay, Zhiwei Zeng, Marolo Alfaro, and Ying Chen	406
9430	STABILIZATION OF MARGINAL CRUSHED ROCK USING CEMENT AND FLY ASH AS A GREEN BASE COURSE MATERIAL Mathagul Metham, Wutthiwat Mangkorngam, Akepong Sedthamanop and Cherdasak Suksiripattanapong	412
9432	STATIC PILE LOAD TEST: INTERNATIONAL PRACTICE REVIEW AND DISCUSSION ABOUT THE EUROPEAN AND JAPANESE STANDARDS Fabien Szymkiewicz , Taisuke Sanagawa and Hidetoshi Nishioka	416
9437	COMPARISON OF DIFFERENT METHODS FOR ANALYSIS OF COMBINED PILED RAFT FOUNDATION Irfan Jamil, Irshad Ahmad, Muhammad Shoaib Khan	422
9448	STUDY ON THE CHANGE OF SOFT SOIL SHEAR STRENGTH AND STIFFNESS IN HO CHI MINH CITY UNDER THE EXTENSION STRESS PATHS FOR DEEP EXCAVATIONS CALCULATION Trung Ngo Duc, Phan Vo and Thanh Tran Thi	428
9450	QA/QC PLAN AND EVALUATION OF CHARACTERISTIC VALUE FOR DEEP CEMENT MIXING S.H. Chew, H.M. Audrey Yim, J.W. Koh, K.E. Chua and Z.X. Gng	434
9460	GEOHERMAL ENERGY PILE-SOIL INTERACTION UNDER MECHANICAL LOADING AND THERMAL CYCLES Alitking Anongphouth, Pooneh Maghoul and Marolo Alfaro	440
9461	TESTS OF FIBER REINFORCED CONCRETE COMPOSITE SLABS ON THE SUBSOIL Radim Cajka, Petr Mynarcik, Zdenka Neuwirthova, Zuzana Marcalikova and Michal Kropacek	446



## **Preface**

Welcome to the GEOMATE 2019 - The Ninth International Conference on Geotechnique, Construction Materials and Environment, GEOMATE 2019, will be held in Hotel Continental Fuchu, Tokyo, Japan in conjunction with the Japan Association for Pulling-out Existing Piles, Mie University Research Center for Environmental Load Reduction, The GEOMATE International Society, The Society of Materials Science, Japan, The Useful Plant Spread Society, Japan, Glorious International, AOI Engineering, HOJUN, CosmoWinds and Beppu Construction, Japan.

On Friday 11 March 2011, at 14:46 Japan Standard Time, the northeast of Japan was struck and severely damaged by a series of powerful earthquakes which also caused a major tsunami. This conference was first dedicated to the tragic victims of the Tohoku-Kanto earthquake and tsunami disasters. The Geomate 2018 conference covers three major themes with 17 specific themes including:

- Advances in Composite Materials
- Computational Mechanics
- Foundation and Retaining Walls
- Slope Stability
- Soil Dynamics
- Soil-Structure Interaction
- Pavement Technology
- Tunnels and Anchors
- Site Investigation and Rehabilitation
- Ecology and Land Development
- Water Resources Planning
- Environmental Management
- Public Health and Rehabilitation
- Earthquake and Tsunami Issues
- Safety and Reliability
- Geo-Hazard Mitigation
- Case History and Practical Experience

Alike earlier conferences, this year we have received many paper submissions from different countries all over the world, including Australia, Bahrain, Bangladesh, Brazil, Canada, Colombia, Czech Republic, Egypt, France, India, Indonesia, Iran, Iraq, Israel, Japan, Kazakhstan, Lebanon, Malaysia, Nigeria, Pakistan, Philippines, Russia, Saudi Arabia, Singapore, South Korea, Taiwan, Thailand, Tunisia, Uganda, United Kingdom and Vietnam. The technical papers were selected from the vast number of contributions submitted after a review of the abstracts. The final papers in the proceedings have been peer reviewed rigorously and revised as necessary by the authors. It relies on the solid cooperation of numerous people to organize a conference of this size. Hence, we appreciate everyone who supports as well as participate in this joint conference.


Last but not least, we would like to express our gratitude to all the authors, session chairs, reviewers, participants, institutions and companies for their contribution to GEOMATE 2019. We hope you enjoy the conference and find this experience inspiring and helpful in your professional field. We look forward to seeing you at our upcoming conference next year.

Best regards,


Prof. Zakaria Hossain, Prof. Mie University, Japan



Prof. Dr. Shinya Inazumi, Shibaura Institute of Technology, Japan



Dr. Jim Shiau, University of Southern Queensland, Australia



## **Organization**

### *Conference Honorary Chairmen:*

Emeritus Professor Dr. Sohji Inoue, Mie University, Japan  
Emeritus Professor Dr. Teruo Nakai, NIT, Japan  
Emeritus Professor Dr. Fusao Oka, Kyoto University, Japan  
Emeritus Professor Dr. Bujang B.K. Huat, UPM, Malaysia

### *Scientific Committees:*

#### *Conference Chairmen:*

Prof. Dr. Shinya Inazumi, Shibaura Ins of Tech, Japan  
Prof. Dr. Zakaria Hossain, Mie University, Japan

#### *Conference Organizing Committee:*

Prof. Dr. Shinya Inazumi, Shibaura Ins. of Tech., Japan (Chair)  
Prof. Dr. Zakaria Hossain, Mie Univrsity, Japan (Chair)  
Dr. Jim Shiau, USQ, Australia (Assiatant to General Chair)  
Prof. Dr. M Ibn Ibrahimy, Prof., Int. Islamic Univ. (Co-Chair)  
Prof. Dr. Toshinori Sakai, Mie University, Japan (Co-Chair)  
Prof. Dr. Takamitsu Kajisa, Mie University, Japan (Co-Chair)  
Dr. Vivi Anggraini, Lecturer, Monash Uni Malaysia (Co-Chair)  
Dr. Masaaki Kondo, Mie University, Japan (Co-Chair)

#### *National & International Advisory Committee:*

Prof. Dr. Fumio Tatsuoka, Tokyo University of Science, Japan  
Prof. Dr. Junichiro Takeuchi, Kyoto University, Japan  
Prof. Dr. Kingshuk Roy, Nihon University, Japan  
Prof. Dr. Sai Vanapalli, University of Ottawa, Canada  
Prof. Dr. Musharraf Zaman, Univ. of Oklahama, USA  
Prof. Dr. Rafiqul Tarefder, University of New Mexico, USA  
Prof. Dr. M. Bouassida, National Sch. of Engg. of Tunis  
Prof. Dr. L.R. Austriaco, Angles Univ. Found., Philippines  
Prof. Dr. M. Ibn Ibrahimy, Int. Islamic Univ., Malaysia  
Prof. Dr. Bujang B.K. Huat, Univ. Putra Malaysia  
Prof. Dr. Nemy Banthia, Univ. of British Columbia, Canada  
Prof. Dr. Ian Jefferson, Univ. of Birmingham, UK  
Prof. Dr. John Bolander, Univ. of California, USA  
Prof. Dr. Shamsul Chowdhury, Roosevelt Univ., USA  
Prof. Dr. Isabel Pinto, University of Coimbra, Portugal  
Prof. Dr. Mark Jaksa, University of Adelaide, Australia  
Prof. Dr. Hj. Ramli Bin Hj. Nazir, UTM, Malaysia  
Prof. Dr. M.S. Hossain, International Islamic Univ. Bangladesh  
Prof. Dr. Suksun Horpibulsuk, Suranaree Uni of Tech, Thailand  
Dr. Muzamir Hasan, Director, CERRM, Univ. Malaysia Pahang  
Dr. Afshin Asadi, S/Lecturer, Int. College of Auckland, New Zealand

*International Technical Program Committee:*

Prof. Sai Vanapalli, University of Ottawa, Canada  
Prof. Alaa Masoud, Tanta University, Egypt  
Prof. Aly Ahmed, Beni-Suef University, Egypt  
Prof. Aminaton Marto, Universiti Teknologi Malaysia, Malaysia  
Prof. Bandari Shankar, Osmania University, India  
Prof. Bashir Ahmed Mir, National Institute of Technology, India  
Prof. Hamidi Abdul, Aziz, Universiti Sains Malaysia (USM), Malaysia  
Prof. Hussein Elarabi, University of Khartoum, Sudan  
Prof. M. Shohidullah Miah, International Univ. of Business Agriculture &Tech., Bangladesh  
Prof. Michele, Casagrande, Pontifical University Catholic of Rio De Janeiro, Brazil  
Prof. Radim Cajka, Technical University of Ostrava, Czech Republic  
Prof. Rajaraman Jambunathan, AMET University, India  
Prof. Reshma Chandran T., Global Institute of Architecture, India  
Prof. Roslan Hashim, University of Malaya, Malaysia  
Prof. Seyed Naser Moghaddas Tafreshi, K.N. Toosi University of Technology, Iran  
Prof. Valeriy Perminov, Tomsk Polytechnic University, Russia  
Prof. Quanmei Gong, Tongji University, China  
A/ Prof. Abdoullah Namdar, Sichuan University, China  
A/ Prof. Abdul Naser Abdul Ghani, Universiti Sains Malaysia, Malaysia  
A/ Prof. Alaeddinne Eljamassi, Islamic University of Gaza, Palestine  
A/ Prof. Alina Paranina, Herzen State Pedagogical University of Russia, Russia  
A/ Prof. Ashraf Elmoustafa, Ain Shams Univeristy, Egypt  
A/ Prof. Bindu C S, Cochin University of Science& Technology, India  
A/ Prof. Chee-Ming Chan, Universiti Tun Hussein Onn Malaysia, Malaysia  
A/ Prof. Chidanand Naik, Anjuman Instistute of Technology and Management, India  
A/ Prof. Dahlia Hafez, Cairo University, Egypt  
A/ Prof. Deepa G Nair, Isfahan University of Technology, India  
A/ Prof. Dolrerdee Hormdee, Khon Kaen University, Thailand  
A/ Prof. Farhad Behnamfar, Isfahan University of Technology, Iran  
A/ Prof. Gabriela B. Cazacu, Geotech Dobrogea, Romania  
A/ Prof. Hadi Khabbaz, University of Technology, Sydney (UTS), Australia  
A/ Prof. Homayoon Ganji, Herat Univercity Badghis, Afghanistan  
A/ Prof. Hudson Jackson, US Coast Guard Academy, United States  
A/ Prof. Inazumi Shinya, National Institute of Technology, Akashi, Japan  
A/ Prof. John Smith, RMIT University, Australia  
A/ Prof. Kasinathan Muthukkumaran, National Institute of Technology, India  
A/ Prof. Lindrianasari Lindrianasari, Universitas Lampung, Indonesia  
A/ Prof. Mahdi Karkush, Baghdad University, Iraq  
A/ Prof. Mohamed Redha Menani, Batna University, Algeria  
A/ Prof. Navid Khayat, Ahvaz Branch, Islamic Azad University, Iran  
A/ Prof. Salam, Bash AlMaliky, AlMustansiriya University, Iraq  
A/ Prof. Shailesh Kumar Jha, Indian Institute of Technology, India  
A/Prof. Teodor Lucian Grigorie, University of Craiova, Romania  
A/Prof. Paresch Dalal, Shri Vitthalrao Shankarrao Naik Arts, Commerce and Science College, India  
A/Prof. Muhammad Qasim, Abdul Wali Khan University Mardan, Pakistan  
A/Prof. R. S. Ajin, GeoVin Solutions Pvt. Ltd., India  
Dr. Abdul Karim M. Zein, University of Khartoum, Sudan  
Dr. Abdull Halim Abdul, Universiti Teknologi MARA, Malaysia  
Dr. Afshin Asadi, University Putra Malaysia, Malaysia  
Dr. Ahmad Safuan A Rashid, Univeristi Teknologi Malaysia, Malaysia  
Dr. Ahmad Safuan Bin A Rashid, Univeristi Teknologi Malaysia, Malaysia  
Dr. Akindele Okewale, Federal University of Petroleum Resources, Nigeria  
Dr. Akinola Johnson Olarewaju, Federal Polytechnic Ilaro, Nigeria  
Dr. Ali Sobhanmanesh, Universiti Teknologi Malaysia (UTM), Malaysia  
Dr. Alireza Bahiraie, Semnan University, Iran

Dr. Allan Manalo, Centre of Excellence in Engineered Fibre Composites, Australia  
Dr. Aniza Ibrahim, National Defence University of Malaysia, Malaysia  
Dr. Arif Ali Baig Moghal, King Saud University, Saudi Arabia  
Dr. Aslan S. Hokmabadi, University of Technology, Sydney (UTS), Australia  
Dr. Ather Ashraf, PUCIT, Old Campus Punjab University, Pakistan  
Dr. Atsuko Sato, Cical Engineering Research Institute for Cold Region, Japan  
Dr. Ben-Hur Silva, Military Institute of Engineering, United States  
Dr. Choy Soon Tan, Univeristi Teknologi Malaysia, Malaysia  
Dr. David Thorpe, University of Southern Queensland, Australia  
Dr. Delsye Ching Lee Teo, Universiti Malaysia Sarawak, Malaysia  
Dr. Domenico Lombardi, University of Manchester, United Kingdom  
Dr. Ehsan, Jorat Newcastle University, United Kingdom  
Dr. Ganesh Kumar Shanmugam, National Institute of Ocean Technology, India  
Dr. Helsin Wang, Institute of Bridge Engineering, Taiwan  
Dr. Hossein Moayedi, Kermanshah University of Technology, Iran  
Dr. Hossein MolaAbasi, Babol University of Technology, Iran  
Dr. James Hambleton, University of Newcastle, Australia  
Dr. James Hambleton, University of Newcastle, Australia  
Dr. Janaka Kumara, Tokyo University of Science, Japan  
Dr. Jirayut, Suebsuk Rajamangala University of Technology Isan, Thailand  
Dr. Juhjung Lee, Korea Institute of Civil Engineering and Building Technology, South Korea  
Dr. Jun Sugawara, Advision - WorleyParsons Group, Australia  
Dr. Lamia Touiti Bouebdellah, Ecole Nationale d'Ingénieurs de Gabes, Tunisia  
Dr. Luky Handoko, Universitas Atma Jaya Yogyakarta, Indonesia  
Dr. M. Mohammad Ali, California Public Utilities Commission, United States  
Dr. Marfiah Ab.Wahid, Universiti Teknologi Mara, Malaysia  
Dr. Maryam Naeimi, Semnan University, Iran  
Dr. Mehdi Mokhberi, Islamic Azad University, Shiraz, Iran  
Dr. Mohd Hairy Ibrahim, Sultan Idris Education University, Malaysia  
Dr. Neelima Satyam, International Institute of Information Technology, India  
Dr. Nor Zurairahetty Mohd Yunus, Univeristi Teknologi Malaysia, Malaysia  
Dr. Siavash Zamiran, Southern Illinois University Carbondale, United States  
Dr. Subha Vishnudas, Cochin University of Science and Technology, India  
Dr. Sunggi Jin, SK E&C, South Korea  
Dr. Sunil Pusadkar, Govt. College of Engineering, Amravati, India  
Dr. Teresa Lopez-Lara, Universidad Autonoma De Queretaro, Mexico  
Dr. Usama Juniansyah Fauzi, University of Tokyo, Japan  
Dr. Yusep Muslih Purwana, Sebelas Maret University, Indonesia  
Dr. Ana Almerich-Chulia, Universitat Politecnica de Valencia, Spain  
Dr. Khor Shing Fhan, Universiti Malaysia Perlis, Malaysia  
Dr. Afshin Asadi, International College of Auckland, New Zealand

*Conference Correspondence:*

Prof. Dr. Zakaria Hossain, Conference Chairman,  
Dept. of Env. Sci. & Tech., Mie University, Japan,  
E-mail: conference@geomate.org  
Tel & Fax: +81-59-231-9578

*Editorial Committee and Executive Committee:*

Prof. Zakaria Hossain, Prof. Mie University, Japan  
Prof. Sinya Inazumi, Shibaura Institute of Technology, Japan  
Dr. Jim Shiau, University of Southern Queensland, Australia

## DEFORMATION ON EMBANKMENTS DUE TO SLAKING PHENOMENON AND ITS COUNTERMEASURE

Andius Dasa Putra<sup>1</sup> and Mamoru Kikumoto<sup>2</sup>

<sup>1</sup>Department of Civil Engineering, Faculty of Engineering, University of Lampung, Indonesia

<sup>2</sup> Institute of Urban Innovation, Yokohama National University, Japan

### ABSTRACT

Geotechnical issues have increased in the last two decades since sedimentary rocks material such as mudstone or shale has been widely used as embankment material. They, however, tend to be weathered once they are immersed in the water. This phenomenon is a kind of weathering processes known as slaking and may cause a reduction of stiffness and peak strength. This paper, in order to evaluate the slaking induced deformation, a number of one-dimensional compression slaking tests and scanning electron microscopy (SEM) tests to observe the physical morphology of mudstone were performed. These data confirm that slaking in crushed mudstone is accompanied by a variation in the particle size distribution during wetting and drying cycles, and a variation in grading results in an irreversible change in mechanical characteristics, such as the reference packing density. Since the particle size distribution was transformed under confined stress constant occurs without a change in the maximum particle size, it can be described by existing indexes of grading such as breakage parameter  $Br$ . Furthermore, to eliminate the deformation behavior of sedimentary rocks, changing the particle size distribution in the beginning by applying loading/unloading history before slaking cycle has exhibited the significant result. The compressibility during wetting and drying cycle decreases to 50% of conventional compression by applying this countermeasure method. In earth construction works, the process of roller compaction is necessary in order to encourage the particle crushing. Proper compaction can control the occurrence of slaking under wetting and drying cycle so that volumetric compression does not occur easily.

*Keywords: mudstone, slaking, particle size distribution, one-dimensional compression, deformation*

### INTRODUCTION

Soft sedimentary soft rock such as mudstone or shale are highly susceptible to weathering. They have a tendency to slake and soften when immersed into the water and as a result their strength diminishes gradually with time. Due to this natural behavior, mudstone material has been mostly disposed as waste material. However, while dealing with economic considerations and environmental concerns, several earth constructions projects propose to utilize the crushed mudstones or shales as embankment materials. Since large embankment made of these materials was considered, long term stability problem may possibly occur to slaking [1] - [3]. One of these embankments located on the Tomei expressway in Makinohara district in Japan failed during the earthquake in 2009, with subsequent field investigation and analysis identifying the primary cause to be slaking of the mudstone [4]. The cross section of Tomei expressway after and before collapse is shown in Fig. 1. The slaking behavior of mudstone has been studied experimentally [5] - [7] through slake-durability tests and other similar tests, in which a number of wetting and drying cycles are applied to evaluate the weathering resistance of weak rocks such as shales, mudstones and siltstones. This

has demonstrated that slaking cycles significantly affect the degradation process and evolution of particle size distribution in such rocks [8] - [10]. Particle size distribution characteristics such as the gradation of weak rock tend to transform in response to slaking induced by wetting and drying, and this will ultimately affect the mechanical behavior as the material after slaking is quite different from the original material [11], [12]. Weak rocks may lose their strength or stiffness through slaking, as this usually results in a gradation with small particle sizes.

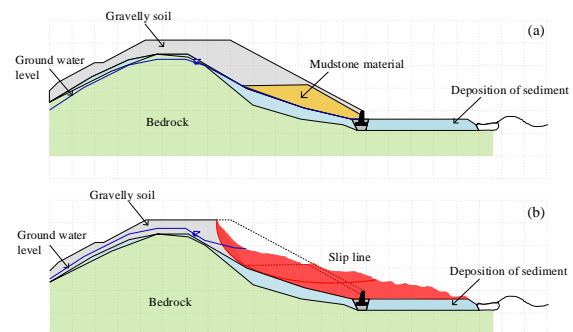


Fig. 1 Cross section of Tomei expressway fault after and before the earthquake in 2009

Such variation in mechanical characteristics during slaking can directly affect the deformation and failure behavior of the ground, but so far, most studies have only looked at the role of slaking in the evolution of the particle size distribution or the change in behavior of weak rocks. As there has been little discussion of the deformation behavior that is directly induced by slaking, this paper attempts to address the slaking-induced deformation based on the one-dimensional compression slaking tests and to propose a rational way to eliminate the issues of the granulated weak rocks in earth construction projects.

**MATERIALS AND METHODS**

**Weak rock materials**

The tested materials presented in this paper has originated from several embankments which caused deformation issues due to slaking phenomena. Kakegawa mudstone was derived from the embankment on Tomei expressway in Japan. Hattian Bala mudstone was obtained from a natural dam which was generated by Kashmir earthquake 2005 that locates at 3.5 km of Karli River in Pakistan. In addition, to investigate the rational countermeasures to the issues related with the weak rocks in embankments, loading histories (loading/unloading) were applied before the wetting and drying cycles. The test was carried out on Nou mudstone since the deformation issues in the field has occurred due to slaking. The particle size distribution of mudstone specimens at the initial state of the one-dimensional compression slaking test was a unit grading having a diameter of 0.85-2.00 mm (passed by sieve no. 10 and restrained by sieve no. 20 ASTM [14]). The physical surface morphology and general properties of the material are summarized in Fig. 2 and Table 1.

Several mechanisms of the slaking of weak rocks were attributed to the compression of air entrapped in the intra-granular pores of the particles [5]. Moreover, the size and the roughness of the pore boundaries have dominant effects on the resistance of particles against slaking. Therefore, it is necessary to explore the surface characteristics of the granulated weak rocks through SEM (Scanning Electron Microscopy) analysis using the same particle size distribution for one-dimensional compression slaking test.

Table 1 General properties of weak rocks materials

Properties	Kakegawa	Hattian Bala	Nou
Particle density (gr/cm <sup>3</sup> )	2.65	2.75	2.69
Max. Void ratio (e <sub>max</sub> )	1.83	1.09	1.97
Min. Void ratio (e <sub>min</sub> )	1.29	0.79	1.40

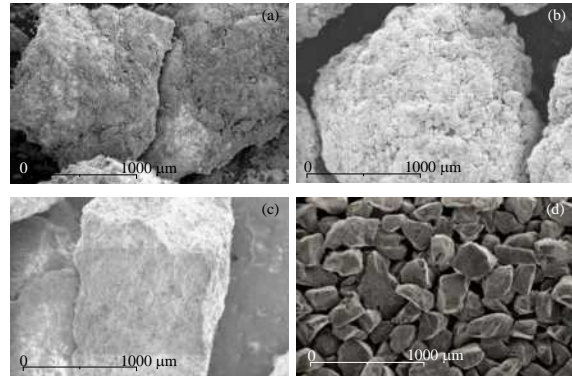


Fig. 2 Physical surface appearance of granulated mudstone magnified to 50 x: (a) Kakegawa; (b) Nou; (c) Hattian Bala and (d) Toyoura sand

**Slaking under Confined Condition: One-Dimensional Compression Slaking Tests**

In order to evaluate the slaking induced deformation on mudstone, a one-dimensional compression test that incorporates wetting and drying cycles [11] was modified. The schematic setup of testing apparatus is shown in Fig. 3, and consisted of: a measuring system (left), loading system (centre), and wetting and drying paths (right). The specimen container was a rigid steel cylinder with dimension of 60 mm in diameter and 40 mm high, with porous stones installed on the top and bottom loading plates, respectively. For testing, dried specimens were first installed in the steel cylinder, after which the load cell and contact-type displacement gauge were installed and initialized. The initial height of the specimen was measured to determine the initial void ratio, and then a vertical stress was applied in stages (9.8, 19.6, 39.2, 78.5, 157, 314, 628, 1256 kPa) by a pneumatic cylinder by way of a loading rod. The time for each loading was set to 30 min, as compression of the specimen immediately occurred and the volumetric behavior did not appear time dependent during the compression stage. After reaching a prescribed vertical stress, a wetting and drying cycle was carried out while keeping the vertical stress constant.

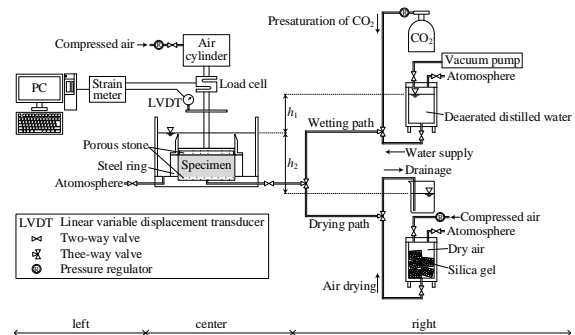


Fig. 3 The schematic of one dimensional compression slaking test

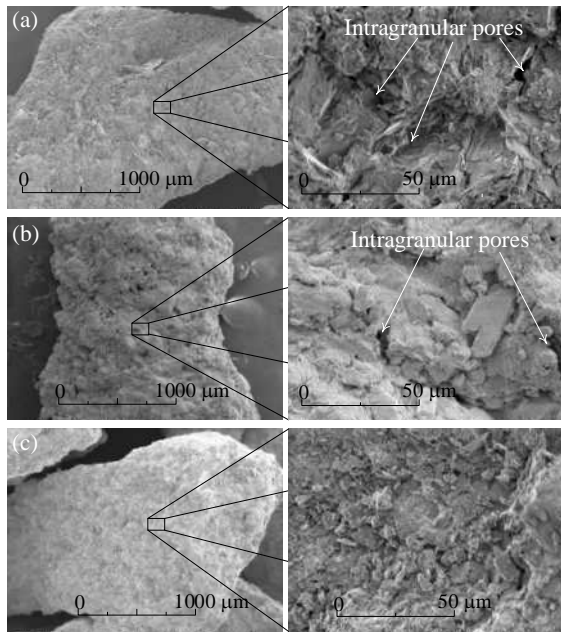


Fig. 4 SEM images of the weak rocks: (a) Kakegawa mudstone; (b) Nou mudstone and (c) Hattian Bala mudstone.

The wetting process started by permeating carbon dioxide slowly through the specimen without changing the void pressure for 30 min to remove any air, after which distilled water was permeated through the specimen by a slight difference in water level between the water tank and specimen container (h1) until the specimen was fully submerged. After leaving the specimen submerged for 6 h, the drying process was commenced by draining the void water from the specimen for 30 min through light difference (h2) in water level. Silica gel packs were then set around the steel cylinder of the specimen container, and dried air was slowly permeated through the specimen for 48 h to ensure it was completely dry. This cycle of wetting and drying was repeated three times, during which time the volumetric behavior was observed. Following the final drying process, the specimen was oven-dried and then sieved using only horizontal circular movements without any tapping impulse being added.

## RESULTS AND DISCUSSIONS

### Intra-granular pores

Several different mechanisms of the slaking of weak rocks have been pointed out in past studies. One of the slaking mechanisms is attributed to the compression of air entrapped in the intra-granular pores of the particles. The effect of the geometry of the intra-granular pores and revealed that the size of the pores and the roughness of the pore boundaries have dominant effects on the resistance of particles against slaking [5], [13]. The surface characteristics

of the granulated mudstones were explored through SEM. The low-magnification images of each specimen on the left side in Fig. 4 clearly expose that clay-sized particles that produce a rough surface texture. It is note that the particles of the Kakegawa and Nou mudstone there is a particularly pronounced accumulation of tiny particles, with apparent intra-granular pores appearing to form within each bulk particle (the right side in Fig. 4.). In comparison, the surface texture of the Hattian Bala mudstone looks relatively smoother, but is still rougher than that of the Toyoura sand presented in Fig. 2.

### Deformation on Weak rocks due to Slaking

The test result of one dimensional compression slaking for the crushed Kakegawa and Nou mudstones under a vertical effective stress  $\sigma_v'$  of 314 and 1256 kPa are shown in Figs. 9 and 10, respectively, whereas the results for the crushed Hattian Bala mudstone under a vertical effective stress  $\sigma_v'$  of 314 kPa are provided in Fig. 11. It is evident from this that the particle size distributions of the crushed Kakegawa was transformed after compression, and that mudstone types experience particle breakage during one-dimensional compression. It is also clear that there is a slightly greater change in particle size distribution at 1256 kPa, and so the evolution of grading due to particle breakage is related to an increase in the stress level. The effect that changes in grading due to slaking have on the mechanical characteristics were investigated by monitoring the maximum and minimum void ratios of the Kakegawa mudstones, Nou mudstone and Hattian Bala mudstone after each cycle of wetting and drying. As seen in Fig. 5 to Fig. 7, the maximum and minimum void ratios decrease by almost the same amount until the third cycle. For the Hattian bala mudstone, these ratios remain almost constant, while in the Kakegawa and Nou mudstone they slightly decrease. The crushed Hattian Bala mudstone, however, retains its original void ratios, and does not seem to exhibit any particle breakage under a stress of less than 314 kPa (Fig. 7).

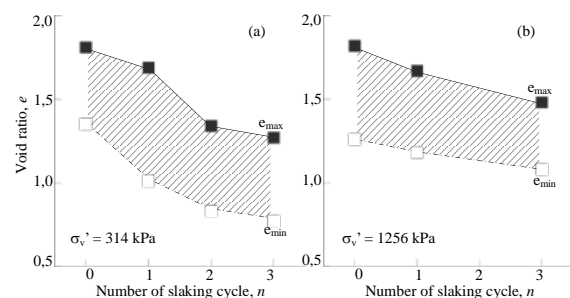


Fig. 5 Changes in void ratio ( $e$ ) during slaking cycles ( $n$ ) of Kakegawa mudstone

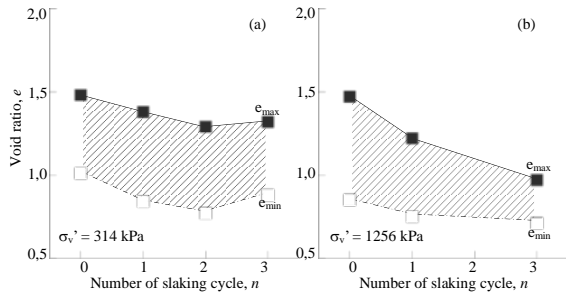


Fig. 6 Changes in void ratio ( $e$ ) during slaking cycles ( $n$ ) of Nou mudstone

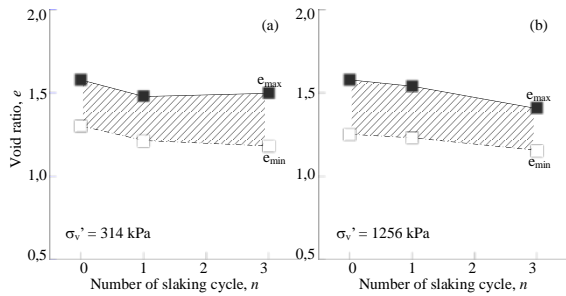


Fig. 7 Changes in void ratio ( $e$ ) during slaking cycles ( $n$ ) of Hattian Bala mudstone

Furthermore, the Hattian Bala mudstone particles did not contain any intra-granular pores (Fig. 4(c)), which would explain why there is so little change in particle size distribution during wetting and drying cycles shown by the breakage parameter ( $B_r$ ) value. Figures 9, 10 and 11 exhibit the relationships between the vertical effective stress  $\sigma_v'$ , number of wetting and drying cycles  $n$ , void ratio  $e$  and breakage parameter  $B_r$  for the all crushed mudstone, respectively. The upper figures ((a) and (b)) illustrate the behavior in compression, whereas the lower figures ((c) and (d)) show the variation in grading based on the  $B_r$  value. From the behavior of the Kakegawa mudstone shown in Fig. 9, it is clear that the value of  $B_r$  (Fig. 9(c)) increases to 0.12 at 314 kPa and to 0.19 at 1256 kPa, which is consistent with particle crushing theory. The compression line in the semi-logarithmic plot of  $e$  and  $\log \sigma_v'$  also becomes steeper, which further confirms that particle crushing occurred [8]. After wetting and drying, the  $B_r$  value increased to 0.44 (Fig. 9(d)) and the specimen experienced significant compression, to the extent that the decrease in void ratio was greater than 0.6. For the crushed Nou mudstone, the results for which is summarized in Fig. 10, the  $B_r$  value increases from 0.21 to 0.25 at 314 kPa but decreases from 0.35 to 0.29 at 1256 kPa during wetting and drying. It was confirmed that particle breakage increases the proportion of fine particles to fill the void space between larger particles without considerably changing the maximum particle size.

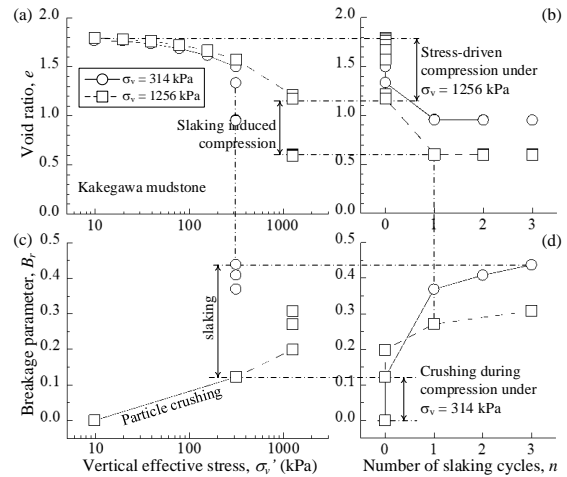


Fig. 8 Changes in the compressive properties and particle size of the Kakegawa mudstone

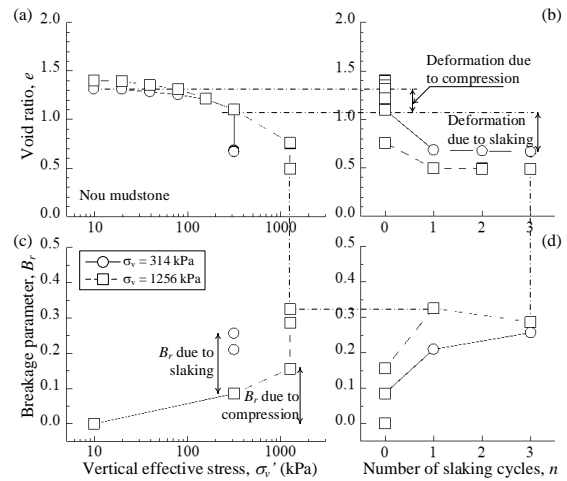


Fig. 9 Changes in the compressive properties and particle size of the Nou mudstone

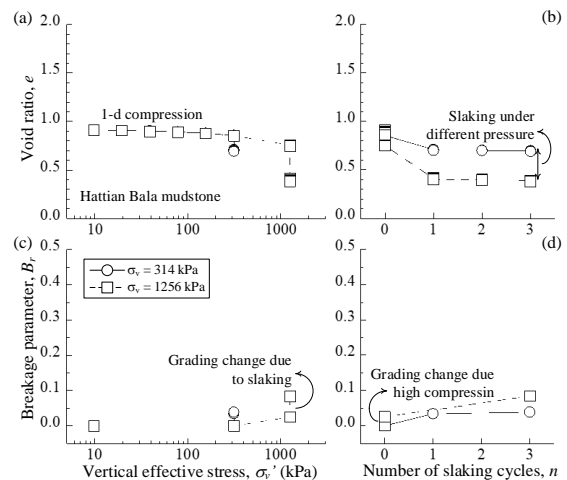


Fig. 10 Changes in the compressive properties and particle size of the Hattian Bala mudstone



The decrease in void ratio  $e$  (volumetric compression) were not significant, comparing to the Kakegawa mudstone. In contrast, the increase in  $B_r$  of the crushed Hattian Bala mudstone (Fig.11) was almost zero during the compression stage at 314 kPa and slightly increase due to high compression at 1256 kPa. The compression line in the  $e$ - $\ln \sigma_v'$  plane was comparatively flat. This indicates that the variation in  $B_r$  during wetting and drying is small. It can be inferred that slaking induced by wetting and drying cycle under a constant vertical effective stress causes substantial compression of geo-materials derived from mudstone.

**An Effort to Eliminate the Deformation on Weak Rocks**

A rational countermeasure technique is needed for reducing the deformation due to slaking on the earth construction project. A number of one-dimensional compression slaking test has been performed on Nou mudstone to get a better understanding related to these circumstances. The effect of loading/unloading compression history before wetting and drying cycle applied is one technique to consider. The procedure for the loading stage was similar with the previous one-dimensional compression slaking test already explained. Except for the effect of loading/unloading, after the high compression of 1256 kPa is applied for 30 min, then followed with the unloading process to 314 kPa for 30 min. Further, the wetting and drying cycles were applied as one cycle. The combination loading patterns in this section are summarized in Table 2. The particle size distribution (PSDs) changes of each case patterns of the test are shown in Fig. 12. It is significant that the PSD curve after loading history (case 7 and case 8) almost similar, despite the initial void ratios are different. It is inferred that the void ratio did not significantly affect to the grading changes. In spite of the high compression applied on the specimen, the final grading change (case 7 and case 8) almost similar with the test result of one-dimensional compression slaking under constant vertical effective stress at 314 kPa (case 3).

The total volume compression between case 3 and case 7 (Fig. 13(a)) also exhibit similar behavior, even though in case 7 the high compression stress has been applied in the beginning. It is pointed out that during the earth construction utilizing the geomaterial which has slaking properties, paying attention to roller compaction throughout the embanking work enhances the crushing of particles, controlling the occurrence of slaking under cyclic wetting and drying so that volumetric compression does not occur easily.

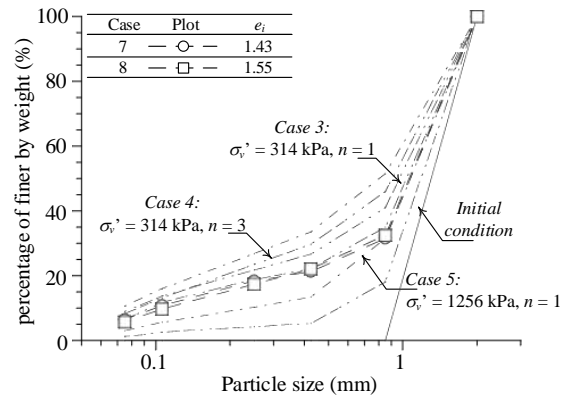


Fig. 11 The particle size distribution changes during stress history applied

Table 2 The one dimensional compression slaking testing series of Nou mudstone

case	1	2	3	4	5	6	7	8
$e_i$	1.3	1.5	1.3	1.3	1.4	1.4	1.4	1.6
$\sigma_v'$			314		1256		1256 - 314	
$n$	0	1	1	3	1	3	1	1

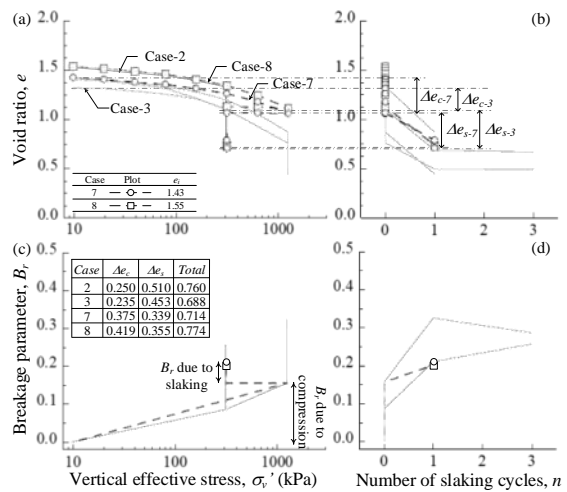


Fig. 12 Change in compressive properties during the stress history (loading/unloading) of Nou mudstone

**CONCLUSIONS**

In order to investigate the deformation due to slaking behavior, a number of one-dimensional compression slaking tests has performed in this paper. The surface morphology of mudstone based on SEM result indicated the different slaking and deformation behavior caused by the intra-granular pores within particle. The transformation of particle size distribution due to slaking is influenced by the existences of intra-granular pores. As a result, it causes an irreversible change in the mechanical properties of weak rocks attributable to variation in

the density compaction. Moreover, the changes in particle size distribution as an evolution grading during compression can increase the compressibility of weak rocks, with wetting and drying cycles causing significant compression even if the effective stress remains constant. Since the evolution of particle size distribution under confined stress constant occurs without a change in the maximum particle size, it can be described by existing indexes of grading such as breakage parameter  $B_r$ . A countermeasures technique of the deformation behavior of weak rocks was performed in this study. Changing the particle size distribution in the beginning by applying loading/unloading history before wetting and drying cycle has exhibited the significant result. The compressibility during wetting and drying cycle decreases to 50% of conventional compression by applying this countermeasure method. In earth construction works, the process of roller compaction is necessary in order to encourage the crushing of particle. A proper compaction can control the occurrence of slaking under wetting and drying cycle so that volumetric compression does not occur easily.

#### ACKNOWLEDGMENTS

Finally, authors would like to extend their appreciation and thanks to the earthworks research section of the NEXCO Research Institute for providing mudstones specimens. The first author is grateful to the University of Lampung and Yokohama national University for supporting and research collaboration. This research is financially supported by JSPS KAKENHI Grant Numbers 24360192, 16H06099 provided to the second author.

#### REFERENCES

- [1] Walkinshaw, J. L. and Santi, P. M., Shales and other degradable materials, Landslides: Investigation and Mitigation, Special Report 247, Transport Research Board, National Research Council, National Academy Press, 1996, pp. 555-576.
- [2] Yoshida, N., Enami, K. and Hosokawa, K., A staged compression-immersion direct shear test on compacted crushed mudstone, Journal of Testing and Evaluation, Vol 30 No. 3, 2002, pp. 239 – 244.
- [3] Santi, P. M., Field methods for characterizing weak rock for engineering, Environmental & Engineering Geoscience, Vol. 12 No. 1, 2006, pp. 1–11.
- [4] Yasuda, S., S. Yokota, H. Nakamura, and K. Inou., Reduction of static and dynamic shear strength due to the weathering of mudstones, Proceedings of the 15<sup>th</sup> World Conference on Earthquake Engineering, Lisboa, 2012, pp. 4-11
- [5] Vallejo, L. E., Welsh, R. A. Jr., Lovell, C. W. and Robinson, M. K., The Influence of Fabric and Composition on the Durability of Appalachian Shales, Rock for Erosion Control. ASTM STP 1177, Charles H. McElroy and David A. Lienhart, Eds., American Society for Testing and Materials, Philadelphia, 1993, pp. 15-28
- [6] Santi, P. M., Improving the jar slake, slake index and slake durability tests for shales, Environmental and Engineering Geoscience. Vol. IV. No. 3, 1998, pp. 385-396
- [7] Yoshida, N. and Hosokawa, K., Compression and shear behavior of mudstone aggregates, Journal of Geotechnical and Geoenvironmental Engineering, ASCE, Vol. 130, No. 5, 2004, pp. 519-525
- [8] Kikumoto, M., Putra, A. D., Fukuda, T, Slaking and deformation behavior, Géotechnique, Vol. 66, No. 9, 2016, pp. 771-785
- [9] Sadisun, I. A., Shimada, H., Ichinose, M. and Matsui, K., Study on the physical disintegration characteristics of Subang claystone subjected to a modified slaking index test, Geotechnical and Geological Engineering, Vol. 23, No. 3, 2005, pp. 199-218
- [10] Gautam, T and Shakoor, A., Slaking behavior of clay-bearing rocks during a one-year exposure to natural climatic conditions, Engineering Geology, Vol. 166: 2013, pp. 7-25
- [11] Putra, A. D and Kikumoto, M., Weathering-induced deformation of geomaterials derived from weak rocks, ARPN Journal of Engineering and Applied Sciences, Vol. 12 No. 12, 2017, pp.3858-3868
- [12] Pappas, D. M. and Vallejo, L. E., The settlement and degradation on nondurable shales associated with coal mine waste embankments, International Journal Rock Mechanics and Mineral Sciences, Vol. 34, No. 3-4, 1997, pp. 241.e1-241.e13
- [13] Vallejo, L.E. and Murphy, A. S., Fractal Pores and the Degradation of Shales, Fractals; Theory and Application in Engineering. M. Deking et.al. (eds), 1999, pp. 229-243.
- [14] ASTM D6913-04, Annual Book of ASTM Standards, ASTM Int., 2004