



# Plagiarism Checker X - Report

## Originality Assessment

Overall Similarity: **22%**

Date: Oct 14, 2022

Statistics: 832 words Plagiarized / 3723 Total words

Remarks: Moderate similarity detected, you better improve the document (if required).

IOP Conference Series: Earth and Environmental Science PAPER • OPEN ACCESS Lampung natural zeolite filled cellulose acetate membrane for pervaporation of ethanol-water

mixtures To cite this article: D A Iryani et al 2018 IOP Conf. Ser.: Earth Environ. Sci. 141

012013 View the article online for updates and enhancements. Related content Ultrasonic

and Hypersonic Studies of Relaxations in Ethanol-Water Mixtures Kenshiro Takagi and Katsuo Negishi - Performance of cellulose acetate membrane with different additives for

palm oil mill effluent (POME) liquid waste treatment N A S Aprilia, Fauzi, N Azmi et al. -

Recent Advances on Bioethanol Dehydration using Zeolite Membrane I G B N

Makertihartha, P T Dharmawijaya and I G Wenten This content was downloaded from IP

address 103.3.46.247 on 09/04/2018 at 06:17 1Content from this work may be used under

the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this

work must maintain attribution to the author(s) and the title of the work, journal citation

and DOI. Published under licence by IOP Publishing Ltd1234567890 "" ICBBogor 2017 IOP

Publishing IOP Conf. Series: Earth and Environmental Science 141 (2018) 012013 doi

:10.1088/1755-1315/141/1/012013 Lampung natural zeolite filled cellulose acetate

membrane for pervaporation of ethanol -water mixtures D A Iryani<sup>1,3,\*</sup>, N F Wulandari<sup>1</sup>,

AW Cindradewi<sup>1</sup>, S Br Ginting<sup>1,3</sup>, E Ernawati<sup>2</sup>, U Hasanudin<sup>3,4</sup> 1Department of Chemical

Engineering, Engineering Faculty, University of Lampung 2Department of Chemistry,

Mathematic and Science, University of Padjajaran Bandung 3Research and Development

Center for Tropical Biomass, University of Lampung 4Department of Agroindustrial

Technology, Agriculture Faculty, University of Lampung \*Corresponding Author:

dewi.agustina@eng.unila.ac.id Abstract. Pervaporation of ethanol-water can be cost -

competitive in the production of renewable biomass ethanol. For the purpose of improving

the pervaporation performance of polymeric membranes, we prepared cellulose acetate

(CA) filled Lampung Natural Zeolite (LNZ) membranes by incorporating LNZ into CA for

pervaporation separation of ethanol-water mixtures. The characteristics and performance

of these filled membranes in the varied ratio of CA:LNZ (30:0, 30:5, 30:10, 30:20, 20:20 and

40:10) wt% were investigated. The prepared membranes were characterized for

pervaporation membrane performance such as %water content and membrane swelling degree. Further, the permeation flux and selectivity of membrane were also observed. The results of investigation show that water content of membrane tends to increase with increase of LNZ content. However, the swelling degree of membrane decrease compared than that of CA control membrane. The permeation flux and the selectivity of membranes tend to increase continuously. The CA membrane with ratio of CA:LNZ 30:20 shows the highest selectivity of 80.42 with a permeation flux of 0.986 kg/(m<sup>2</sup> h) and ethanol concentration of 99.08 wt%. Keywords: Cellulose acetate membrane; Lampung natural zeolite, pervaporation

1. Introduction Bioethanol is one of the promising renewable biofuels that continue to be developed as an alternative fuel. However, in order to be used as an alternative fuel, ethanol must have high purity (less than 0.5 wt% water). To achieve high purity, separation techniques such as extractive distillation or azeotropic distillation are required because the ethanol-water mixture forms an azeotrope. However, the ethanol purification process by using conventional distillation followed by extractive distillation is disadvantageous due to the high cost of service [1]. Therefore, a cheaper alternative of purification process is needed to make ethanol to be applied as fuel.

Currently, the pervaporation technique to purification of bioethanol has attracted considerable attention since its high efficiency and low cost operation. Pervaporation is one of purification method by using membrane like material for separation of mixture of liquids by partial vaporization. Pervaporation has several advantages compared with conventional distillation, such as low energy consumption, no additives required and relatively low energy consume [2]. Membrane pervaporation technique is used to separate a liquid mixture by partly vaporizing it through a nonporous permselective membrane [3]. There are two types of membrane can be applied for ethanol production, namely organophilic membranes for recovery of ethanol from fermentation broth and hydrophilic membranes for dehydration of ethanol near azeotrope point in a

Series: Earth and Environmental Science 141 (2018) 012013 doi:10.1088/1755-1315/141/1/012013 as able to separate the azeotropic mixture, no additives required and relatively low energy consume [2]. Membrane pervaporation technique is used to separate a liquid mixture by partly vaporizing it through a nonporous permselective membrane [3]. There are two types of membrane can be applied for ethanol production, namely organophilic membranes for recovery of ethanol from fermentation broth and hydrophilic membranes for dehydration of ethanol near azeotrope point in a

hybrid distillation-pervaporation process [1]. There are three types of hydrophilic membranes are often used on pervaporation of ethanol-water, such as: (1) polymeric membranes which are based on organic polymer chains that are cross-linked together, (2) inorganic membranes, fabricated from ceramics or zeolites, and (3) composite membranes that are based on an organic polymeric membrane but have inorganic particles dispersed throughout the polymeric structure, these are commonly termed mixed matrix membranes [2]. One type of polymeric membrane is widely applied to separate substances in liquid and gas phase is cellulose acetate (CA) [4], [5]. CA is widely used as a membrane material because it has several advantages, such as easy to produce and derived from natural renewable substances, low price, moderate chlorine resistance, and it has good biocompatibility [6]. However, organic polymer such as CA is not suitable for more aggressive cleaning as it has easily oxidized and low chemical resistances and mechanical strength CA membrane also has several disadvantages, such as its easily oxidized, low chemical and mechanical resistance [4]. Therefore, a special treatment is required to improve performance by improving the deficiency of CA properties [7],[4],[5]. Membrane modification is one of the special treatments that can be performed to correct its deficiency properties resulting in increased membrane performance by adding additives such as alumina and silica as fillers to improve the characteristics and improve membrane performance [8]. As above mentioned, the performance of the CA membranes can be improved by mixing the additive substance into the membranes. Several researchers have investigated the effect of mixing many CA as organic polymers with inorganic materials such as alumina, silica, titania, and etc [6] and [5]. The presence of inorganic material able to improve mechanical stability, increasing fouling resistance ability, surface porosity, permeability properties and membrane selectivity in separation processes [6], [9], [5]. Recently, few researchers have investigated that the blend of zeolite with organic polymer able to improve pervaporation performance of ethanol-water. [10] had studied the pervaporation separation of ethanol-water mixture using PVA zeolite-clay membranes to investigate the effect of ethanol feed concentration (10%, 30%, 50%, 70% dan 90%) and

operati on temperature (30, 40 , 50, 60, and 70 oC). Their investigation shows that, when the ethanol concentrations of feed and operation temperature increase d, the membrane selectivity increased, on the contrary, the absorption (flux) decreased. Similarly, [11] conducted <sup>24</sup>the investigation of thinfilm zeolite-filled silicone/PVDF composite membranes which were fabricated by incorporating zeolite particles into PDMS (poly(dimethylsiloxane)) membranes. The result showed that <sup>6</sup>the increase of zeolite loading from 10% to 30% was in creasing the total flux with significantly from 265.0 g/(m<sup>2</sup>h) into 820.7 g/(m<sup>2</sup>h) with 5 wt% ethanol feed concentration at 50°C, and the separation factor from 11.3 to 13.7. In the present study, <sup>1</sup>Lampung Natural Zeolite (LNZ) was added from in 5 to 30 wt % into the casting solution to prepare the new CA/LNZ hybrid membranes. <sup>4</sup>The effects of LNZ addition on prepared membranes were investigated by swelling degree test, and water content. In addition, the pervaporation performance of the membranes such as permeability and selectivity were also evaluated for dehydration of ethanol/water mixture in order to produce ethanol according to fuel specifications.

## 2. Materials and Methods

### 2.1 Materials

Commercial grade cellulose acetate (Sigma Aldrich, USA) with acetyl content 39 %wt - 41 %wt and Mw 30,000 <sup>2</sup>was used as the matrix polymer membrane. Lampung natural zeolite (LNZ ) (200 31234567890 """" <sup>13</sup>CBBogor 2017 IOP Publishing IOP Conf. Series: Earth and Environmental Science 141 (2018) 012013 doi :10.1088/1755-1315/141/1/012013 mesh) which purchased from CV. Minatama, Lampung,Indonesia <sup>2</sup>was used as a filler and N2 liquid <sup>2</sup>was used as cold trap permeate on pervaporation process.

### 2.2 Solution B lending and Hybrid Membranes Fabrication

CA filled zeolite membrane were fabricated using the casting solution method by following procedure of [5]. In this case, CA dissolved in 100 ml of acetone (J.T baker, USA) and stirred until homogen. Afterward, the calculated amounts of LNZ were added into CA solution to making the various ratio of CA : LNZ <sup>2</sup>( 30 : 0 ; 30 :span class='highlighted color-2'>> 5 ;span class='highlighted color-2'>> 30 : 10; 30 : 20; 20 : 20 ) wt%. The resulting of CA/LNZ slurry was stirred for 24 hours. The resulting CA slurry was set aside for 2 h ou rs to remove air bubbles after 24 hou rs of stirring. Thus, the CA slurry

was casted on a glass plate. The film was then placed in air for 20 seconds to evaporate the solvent, and then dipped in ice water for 20 min to complete the phase separation process. Further, the ice water was replaced with hot water (80 °C) to separate the membranes from the glass surface. For drying purpose, the hybrid membranes underwent to solvent exchange method. Finally, the hybrid membranes were placed in an oven that was maintained at 60 °C for 2 hours.

### 2.3 Pervaporation test of membrane

The pervaporation experiments test were conducted by using an apparatus as shown in Figure 1. The prepared CA/LNZ membrane was setted into the membrane cell module in pervaporation apparatus. The diameter of effective membrane area in contact with feed was 12.56 cm<sup>2</sup>. First of all, the pervaporation apparatus was setting and tested by run the machine using distilled water to remove unwanted material in the machine. Then, the feed composition was running up to free machine from distilled water. The fed solution with 96 wt-% of ethanol/water mixture was stored in the feed flask and heated into 40 oC using heater. A peristaltic pump was used to circulate the feed solution from the feed flask into the membrane cell module. The circulation rate was kept high to minimize concentration polarization in the permeation cell and maximize mixing of solution in the feed tank. The vacuum in the downstream side was maintained at about 0,3 mBar using a vacuum pump, and permeate was collected in liquid nitrogen-cold traps. The compositions of the feed remain in the flask and permeate composition were measured using picnometer and gas chromatography to determine the separation factor and total flux. The permeation flux and the separation factor of membrane were determined as equation as follows:

$$1 = J \quad (1) \text{ Where } J \text{ is permeate flux (}/m^2 \text{ h), } m \text{ is total mass of permeate (gram) collected in } t \text{ (hours), and } A \text{ (m}^2\text{) denotes the effective area of the membrane. The } dm/dt \text{ is slope which was derived from graph from relations between mass of permeate and time of pervaporation. } ( ) / ( ) / ( \text{eth } W \text{ eth } W \text{ X } X \text{ Y } Y = a \quad (2) \text{ Where } X_w \text{ and } X_{eth} \text{ are the weight fraction of ethanol and water (wt\% ) in the feed solution respectively, and } Y_w \text{ and } Y_{eth} \text{ represent the weight fraction of ethanol and water (wt\% ) in the$$

permeate. 41234567890 "" ICBBogor 2017 IOP Publishing IOP Conf. Series: Earth and Environmental Science 141 (2018) 012013 doi

:10.1088/1755-1315/141/1/012013

1. Peristaltic Pump, 2. Heater, 3. Three

neck glass, 4. Thermometer, 5. Module membrane, 6. Manometers, 7. Cold Trap, 8.

Condenser, 9. Silica gel, 10. Vacuum Pump Figure 1. Schematic of pervaporation experiment

apparatus 2.4 Membrane characterization test 2.4.1 Swelling Degree The swelling degree

of the membranes was obtained after soaking a known weight of samples in fed solution (ethanol 96 wt%) for 48 h (until equilibrium reached) at room temperature, then removed.

The surface of membrane was on swollen samples was blotted by pressing between the folds of filter paper and quickly weighed. The percentage of swelling degree was

determined as follows:  $\% \text{ 100} \times \frac{\text{weight sample dry} - \text{weight sample wet}}{\text{weight sample dry}}$

(%) Degree Swelling =

(3) 2.4.2 Water content analysis The procedure

for water content analysis was conducted by following the method of [7]. Water content of

the membranes was obtained after soaking a known weight of samples in distilled water

for 24 h and the membranes were weighed followed by mopping it with tissue paper. The

wet membranes were then dried in vacuum drier at 75 °C for 48 h and the dryweights of

the membranes were determined. The percent water content was determined by using the

equation as follows:  $\% \text{ Water Content} = \% \text{ 100} \times \frac{\text{weight sample wet} - \text{weight sample dry}}{\text{weight sample dry}}$

weight sample (wet x

(4) 10 9 8 6 5 4 3 2 1 7 51234567890 "" ICBBogor 2017

IOP Publishing IOP Conf. Series: Earth and Environmental Science 141 (2018) 012013 doi

:10.1088/1755-1315/141/1/012013 3. Results and Discussions 3.1 Effect of zeolite addition

to swelling degree The ideal pervaporation membrane should have not easy to swell

excessively to maintain its structural selectivity and stability [12]. It is observed from Figure

2 that the presence of LNZ as the additive to casting solution decrease membrane swelling

degree. The pure 100 wt.% CA membrane was compared with the CA/LNZ ratio of 30:5,

30:10, 30:20, 20:20, and 40:10 wt.%. It was observed that 100 wt.% CA membrane shows

almost similar value of swelling degree percentage. In the presence of 10 - 20 wt.% LNZ,

the swelling degree percentage showed a lower value than 100 wt % CA membrane. The

LNZ presence on casting solution can serve to limit the molecular motions of the polymer chains. Limited molecular motions and a favorable increase in the mean distance between chains can lead to a simultaneous improvement of membrane stability or rigidity and porosity. Thus, it can be concluded that the addition of LNZ into CA gives a significant effect on the swelling degree of the membrane.

Figure 2. Effect of addition of LNZ into CA solution in varied ratio of CA/LNZ to percentage of swelling degree. 3.2 Water Content analysis Figure 3 shows the effect of LNZ addition into water content of membranes. As can be seen from Figure 3, the percentage water content of 100 wt.% CA membranes are lower than that of the membrane prepared by addition of LNZ.

Hydrophilicity properties of the membrane relate to its water content percentage [13]. The hydrophilicity of the membrane affects the percentage of water content due to water absorbed into the membrane matrix. Similar results were also demonstrated by [7]. In their study, it was observed that an addition of polyethylene glycol (PEG 600) and TiO<sub>2</sub> able to increase the membrane water content. The increase of water content possibly due to a presence of TiO<sub>2</sub> as inorganic phase was able to create the spaces in the polymer matrix and make an increase in the mean distance (free volume) between the polymer chains which leads to increasing the water content [14]. Moreover, the occurrence of "leached out" or dissolved during the process of gelation leading to the formation of pores, thus, the water molecule is trapped in the pores of the membrane matrix.

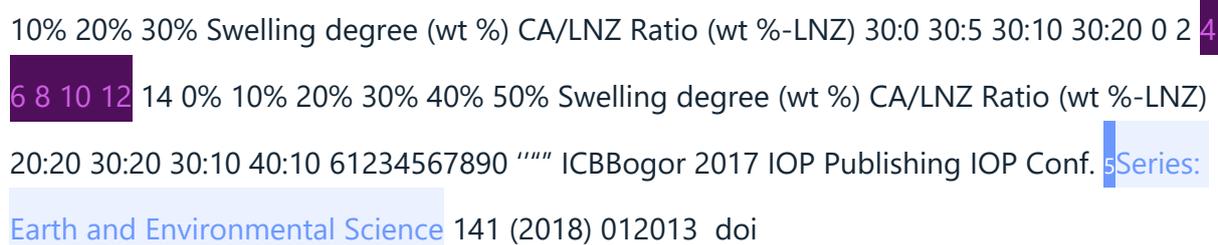


Figure 3. Effect of addition of LNZ into CA solution in varied ratio of CA/LNZ to percentage of water content. 3.3 Permeation and selectivity (Separation Factor) of membranes. The results of permeation fluxes test and selectivity of membrane shows in Figure 4 and Table 1. An increase of LNZ addition from 5 to 10% resulted an increase of membrane total flux. In contrast to LNZ addition to 20% in the

casting solution decreases membrane flux. Similar results were obtained in the ratio of CA/LNZ 20:20 and 40:10. This result occurs due to the thickness of the synthesized membrane were reduced by increasing CA concentration. Increasing CA concentration from 20 % to 40% and LNZ loading from 10% to 20% intensifies thermodynamic instability of the cast film solution and thus demixing of this concentrated solution can be performed with less amount of nonsolvent. It also observed from the experiment, viscosity values of the casting solutions are too high and thus it affects diffusivities of ingredients. Increase in the CA concentration 30% to 40% increase in viscosity values and intensive reduction of mutual diffusivities between the nonsolvent (water) and the solvent (acetone) in the system during solidification of the casting solution. Thus, it influence the precipitation process and this leads to preparation of thinner and denser membranes. Figure 4. Effect of addition of

LNZ into CA solution in varied ratio of CA/LNZ to pervaporation performance of permeation fluxes 0 5 10 15 20 25 0% 5% 10% 15% 20% 25% Water content (wt %) CA/LNZ Ratio (wt %-LNZ) 30:0 30:5 30:10 30:20 0 5 10 15 20 25 0% 10% 20% 30% 40% 50% water content (wt %) CA/LNZ Ratio (wt %-LNZ) 30:20 30:10 40:10 20:20 0 0,5 1 1,5 2 2,5 3 0% 10% 20% 30% Permeation Fluxes(kg/m<sup>2</sup> h) Ratio of CA:LNZ 30:0 30:5 30:10 30:20 2.5 1.5 0.5 0 0,5 1 1,5 2 2,5 3 0% 10% 20% 30% 40% 50% PermeatiFluxes(kg/m<sup>2</sup>.h) Ratio of CA:LNZ 20:20 30:20 30:10 40:10 2.5 1.5 0.5 71234567890 "" ICBBogor 2017 IOP Publishing IOP Conf.

Series: Earth and Environmental Science 141 (2018) 012013 doi

:10.1088/1755-1315/141/1/012013 Differ with flux permeation value, the selectivity of membrane in ratio of CA/LNZ 30:10 decreases and it was decreasing the dehydration performance of ethanol (97.67%). However, when the ratio of CA/LNZ 30:20 the selectivity of membrane was higher than the separation factor of pure CA and o ther CA:LNZ ratio.

Based on the results, it was observed that increase of LNZ loading into membrane casting solution made hydrophilicity of the membrane changes the membrane morphology in a manner that the flux permeation increase. This can be explained that the transport of ethanol molecules through the CA filled LNZ membranes took place in a straight path through the zeolite pores and led to increase of the separation factor. Increase in

separation factor has achieved when the LNZ content was 20 wt%. The increase in separation factor may have been attributed to the pore size effect of LNZ and a close contact between the polymer and LNZ particles. When excess LNZ was added, more interfacial defects could be generated. Consequently, more ethanol molecules got the opportunity to pass through the membrane. However, the data are shown in the CA / LNZ ratio of 30:10 disagree with the theory or the trend shown by the other data. This is predicted when LNZ mixing in the casting solution causes the viscosity was too high, thus, resulting in an in homogeneous mixing between CA and LNZ. Tabel 1. Effect of CA/LNZ Ratio to selectivity and ethanol concentration

Ratio of CA/LNZ	Selectivity (%)	Ethanol Conc. (%)
30 : 0	20,68	97,85
30 : 5	22,15	97,92
30 : 10	17,27	97,67
30 : 20	80,42	99,08
40 : 10	46,88	98,65
20 : 20	31,77	98,28

4. Conclusions Ratio of CA:NZL affects membrane characteristics and performance. However, the portion of the LNZ added as filler should not be too high, as it may decrease the efficiency of the separation. The best membrane performance was obtained at CA/ZAL ratio 30:20 with flux value 0.986 kg/ m<sup>2</sup>.jam, selectivity 80.42 and obtained highest ethanol purity that is equal to 99.081%. Addition of ZAL can improve the hydrophilicity properties of CA membranes. 5.

**Acknowledgement** The authors gratefully acknowledge the financial support of the Directorate General of Higher Education, National Ministry of Republic Indonesia for research grant of "Hibah Fundamental Dikti 2016". This study was successfully done by the facilities support of Integrated Laboratory for Biomassa University of Lampung. 6.

**References** [1] Samanta HS and Ray SK 2014 Separation of ethanol from water by pervaporation using mixed matrix copolymer membranes, Separation Purification Technology Journal doi: <http://dx.doi.org/10.1016/j.seppur.2015.03.006> [2] Chapman PD, Oliveirab T, Livingstona AG, Li K 2008 Membranes for the Dehydration of Solvents by Pervaporation, Journal of Membrane Science 318 5 – 37 [3] Kanse NG and Dawande SD 2015 A Review Of Pervaporation Membrane System For The Separation Of Ethanol/Water (Azeotropic Mixture), International Journal Engineering Science & Research Techology ISSN: 2277-9655 [http:// www.ijesrt.com](http://www.ijesrt.com) 81234567890 "" "" ICBBogor 2017 IOP Publishing IOP

Conf. Series: Earth and Environmental Science 141 (2018) 012013 doi  
:10.1088/1755-1315/141/1/012013 [4] Kanagaraj P, Neelakandan S, Nagendran A 2014  
Preparation, Characterization and Performance of Cellulose Acetate Ultrafiltration  
Membrane Modified by Charged Surface Modifying Macromolecule, India : Korean Journal  
of Chemical Engineering 31:6 10571064. [5] Minhas FT, Farrukh S, Hussain A, Mujahid M  
2015 Comparison of Silica and Novel Functionalized Silica-Based Cellulose Acetate Hybrid  
Membranes in Gas Permeation Study, Journal of Polymer Research 22: 63 [6]  
Arthanareeswaran G, Thanikaivelan P, Srinivasn K, Mohan D, Rajendran M 2004 Synthesis,  
Characterization and Thermal Studies on Cellulose Acetate Membranes with Additive,  
European Polymer Journal 40 2153 –2159. [7] Arthanareeswaran G, Sriyamuna Devi T.K,  
Raajenthiren M 2008 Effect of Silica Particles on Cellulose Acetate Blend Ultrafiltration  
Membranes: Part I, Separation and Purification Technology 64 38 – 47 [8] Huang HJ,  
Ramaswamy S, Tschirner UW, Ramarao BV 2008 A Review of Separation Technologies  
in Current and Future Biorefineries, Separation and Purification Technology 62 1 – 21. [9]  
Dogan, H and Hilmioglu N D 2010 Chitosan Coated Zeolite Filled Regenerated Cellulose  
Membrane for Dehydration of Ethylene Glycol/Water Mixtures by Pervaporation,  
Desalination 258 120 – 127. [10] Ling LK, Ghazali M, Nawawi M, Sadikin AZ  
2008 Pervaporation of Ethanol-Water Mixture Using PVA Zeolite -Clay Membranes,  
Journal Teknologi Universiti Teknologi Malaysia, 49(F) 167– 177. [11] Zhan X, Li JD, Chen J,  
Huang J 2009 Pervaporation of Ethanol/Water Mixtures with High Flux by Zeolite-Filled  
PDMS/PVDF Composite Membranes, Chinese Journal of Polymer Science 27:6 771 – 780.  
[12] Pabby, Anil K., Syed SH, Rizvi, Requena AM 2015 Handbook of Membran Separations:  
Chemical, Pharmaceutical, Food, and Biotechnological Applications, 2nd edition CRC  
Press, Taylor & Francis Group. [13] Sivakumar, Muthusamy, Mohan D R, Rangarajan R  
2006 Studies on Cellulose Acetate Polysulfone Ultrafiltration Membranes II: Effect of  
Additive Concentration, Journal of Membran Science Volume 268; 2 208– 219. [14] Wang Y,  
Yang L, Luo G, Dai Y 2009 Preparation of Cellulose Acetate Membrane Filled With Metal  
Oxide Particles for the Pervaporation Separation of Methanol/Methyl TertButyl Ether



## Sources

1	<a href="https://ui.adsabs.harvard.edu/abs/2018E&amp;ES..141a2013I/abstract">https://ui.adsabs.harvard.edu/abs/2018E&amp;ES..141a2013I/abstract</a> INTERNET 6%
2	<a href="https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6233010/">https://www.ncbi.nlm.nih.gov/pmc/articles/PMC6233010/</a> INTERNET 4%
3	<a href="https://www.sciencedirect.com/science/article/pii/B9780128167854000021">https://www.sciencedirect.com/science/article/pii/B9780128167854000021</a> INTERNET 4%
4	<a href="https://www.semanticscholar.org/paper/Pervaporation-of-ethanol-water-mixture-using-PVA-Lee-Nawawi/b406609b97a854a9442609871d8ca80cacd556bf">https://www.semanticscholar.org/paper/Pervaporation-of-ethanol-water-mixture-using-PVA-Lee-Nawawi/b406609b97a854a9442609871d8ca80cacd556bf</a> INTERNET 1%
5	<a href="https://publishingsupport.iopscience.iop.org/questions/iop-proceedings-licence/">https://publishingsupport.iopscience.iop.org/questions/iop-proceedings-licence/</a> INTERNET 1%
6	<a href="http://www.cjps.org/article/app/id/8d8b3510-e067-4edb-9406-87d34ef73cbf?pageType=en">http://www.cjps.org/article/app/id/8d8b3510-e067-4edb-9406-87d34ef73cbf?pageType=en</a> INTERNET 1%
7	<a href="https://www.semanticscholar.org/paper/Comparison-of-silica-and-novel-functionalized-in-Minhas-Farrukh/3ffc81b438e9fb0c06bf888c75244b2848307b49/figure/0">https://www.semanticscholar.org/paper/Comparison-of-silica-and-novel-functionalized-in-Minhas-Farrukh/3ffc81b438e9fb0c06bf888c75244b2848307b49/figure/0</a> INTERNET <1%
8	<a href="https://publons.com/publon/11656547/">https://publons.com/publon/11656547/</a> INTERNET <1%
9	<a href="https://citeseerx.ist.psu.edu/showciting?cid=63782867">https://citeseerx.ist.psu.edu/showciting?cid=63782867</a> INTERNET <1%
10	<a href="https://www.sciencedirect.com/science/article/abs/pii/S0927519306800070">https://www.sciencedirect.com/science/article/abs/pii/S0927519306800070</a> INTERNET <1%
11	<a href="https://pubs.acs.org/doi/full/10.1021/ie061268n">https://pubs.acs.org/doi/full/10.1021/ie061268n</a> INTERNET <1%
12	<a href="http://eprints.covenantuniversity.edu.ng/12928/1/Adewusi_2018_IOP_Conf._Ser._Earth_Environ._Sci._173_012_013.pdf">http://eprints.covenantuniversity.edu.ng/12928/1/Adewusi_2018_IOP_Conf._Ser._Earth_Environ._Sci._173_012_013.pdf</a> INTERNET <1%
13	<a href="https://google.iopscience.iop.org/article/10.1088/1755-1315/141/1/012011/pdf">https://google.iopscience.iop.org/article/10.1088/1755-1315/141/1/012011/pdf</a> INTERNET <1%
14	<a href="https://www.unila.ac.id/en/unila-students-initiate-sophisticated-buildings-for-sustainable-agriculture/">https://www.unila.ac.id/en/unila-students-initiate-sophisticated-buildings-for-sustainable-agriculture/</a> INTERNET <1%

15	<a href="https://www.sciencedirect.com/science/article/pii/S1383586602001764">https://www.sciencedirect.com/science/article/pii/S1383586602001764</a> INTERNET <1%
16	<a href="https://scholar.google.com/citations?user=ETIUxM8AAAAJ">https://scholar.google.com/citations?user=ETIUxM8AAAAJ</a> INTERNET <1%
17	<a href="https://www.sciencedirect.com/science/article/abs/pii/S037673880800183X">https://www.sciencedirect.com/science/article/abs/pii/S037673880800183X</a> INTERNET <1%
18	<a href="https://www.sciencedirect.com/science/article/pii/S0376738808009356">https://www.sciencedirect.com/science/article/pii/S0376738808009356</a> INTERNET <1%
19	<a href="https://www.sciencedirect.com/science/article/abs/pii/S0376738805004746">https://www.sciencedirect.com/science/article/abs/pii/S0376738805004746</a> INTERNET <1%
20	<a href="https://www.chegg.com/homework-help/questions-and-answers/year-2023-aggregate-demand-aggregate-supply-fictional-country-demet-represented-curves-ad2-q47862831">https://www.chegg.com/homework-help/questions-and-answers/year-2023-aggregate-demand-aggregate-supply-fictional-country-demet-represented-curves-ad2-q47862831</a> INTERNET <1%
21	<a href="https://www.coursehero.com/file/p2ja9rnn/ACKNOWLEDGEMENT-The-authors-gratefully-acknowledge-the-financial-support-from/">https://www.coursehero.com/file/p2ja9rnn/ACKNOWLEDGEMENT-The-authors-gratefully-acknowledge-the-financial-support-from/</a> INTERNET <1%
22	<a href="http://eprints.utm.my/id/eprint/8670/">http://eprints.utm.my/id/eprint/8670/</a> INTERNET <1%
23	<a href="https://equi-analytical.com/resources/as-sampled-vs-dry-matter-results/">https://equi-analytical.com/resources/as-sampled-vs-dry-matter-results/</a> INTERNET <1%
24	<a href="https://www.ceb.cam.ac.uk/">https://www.ceb.cam.ac.uk/</a> INTERNET <1%
25	<a href="https://www.sciencedirect.com/topics/engineering/ethanol-purification">https://www.sciencedirect.com/topics/engineering/ethanol-purification</a> INTERNET <1%