



# Indonesian Journal of Science & Technology



Indonesian Journal of Science & Technology  
Volume 8, Issue 1, January 2016  
http://www.ijst.iaescore.com

## BUKTI KORESPONDENSI IJoST

Indonesian Journal of Science and Technology (IJoST)

### **Judul : Application of Artificial Neural Network to Predict Biodiesel Yield from Waste Frying Oil Transesterification**

- SUBMIT (4 Februari 2019)
- REVISI JURNAL (19 Februari 2019)
- ACCEPTED (2 September 2019)
- TERBIT DI IJoST (Januari 2020)

### **Daftar Lampiran**

	Halaman
1. Surat pengantar pengiriman naskah .....	3
2. Highlight .....	4
3. Graphical abstract.....	5
4. Naskah awal yang dikirim .....	6
5. Submission acknowledge dari editor .....	18
6. Pemberitahuan editor untuk memperbaiki naskah .....	19
7. Balasan author bahwa naskah telah direvisi .....	19
8. Naskah yang telah direvisi .....	20
9. Email author: menanyakan status naskah .....	33
10. Pemberitahuan dari editor bahwa naskah di-Accepted dan tagihan APC .....	34
11. Balasan author bahwa APC sudah ditransfer .....	35
12. Kopi halaman status editing paper sudah dinyatakan Accepted.....	36

Agus Haryanto  
Agricultural Engineering Dept., University of Lampung  
Jl. Soemantri Brojonegoro No.1, Bandar Lampung 35145

04 Feb. 19

Dear Dr. Asep Bayu Nandiyanto  
[Chief Editor IJoST]

Greeting,

I wish to submit an original research article entitled "*Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification*" for consideration by **Indonesian Journal of Science & Technology**.

I confirm that this work is original and has not been published elsewhere, nor is it currently under consideration for publication elsewhere.

In this paper, I report that artificial neural network (ANN) is a powerful method to predict biodiesel yield from a transesterification of waste frying oil. This is significant because the prediction using ANN model is better than that of kinetic approach.

We believe that this manuscript is appropriate for publication by **Indonesian Journal of Science & Technology** because it complies with journal's Focus & Scope especially for especially in the field of Chemistry and Chemical Engineering and also Environment Science and Engineering.

Biodiesel has become one of promising energy source in the future. Reaction yield is main target in every biodiesel industry and the prediction of it is important. Our finding reveals that ANN model can be efficiently explored to predict biodiesel yield. Yield prediction using ANN models with activation function of logsig-purelin-logsig and purelin-logsig-tansig is excellent with *RRMSE* (Relative Root Mean Squared Error) of 2.41% and 2.44%, respectively, and  $R^2$  (determination coefficient) of 0.9355 and 0.9391%, respectively.

We have no conflicts of interest to disclose.

Please address all correspondence concerning this manuscript to me at [agus.haryanto@fp.unila.ac.id](mailto:agus.haryanto@fp.unila.ac.id).

Thank you for your consideration of this manuscript.


Sincerely,

[Agus Haryanto]


## HIGHLIGHT

- ANN model provides a powerful method to predict biodiesel yield produced from transesterification of waste frying oil.
- Twenty seven ANN models from combinations of tansig, logsig, purelin activation function were trained using 116 data set of biodiesel yield observed at three different molar ratios, six different temperatures and seven points reaction time.
- ANN models with activation function of logsig-purelin-logsig and purelin-logsig-tansig be the best with *RRMSE* of 2.41% and 2.44%, respectively, and  $R^2$  of 0.9355 and 0.9391%, respectively.


**GRAPHICAL ABSTRACT**

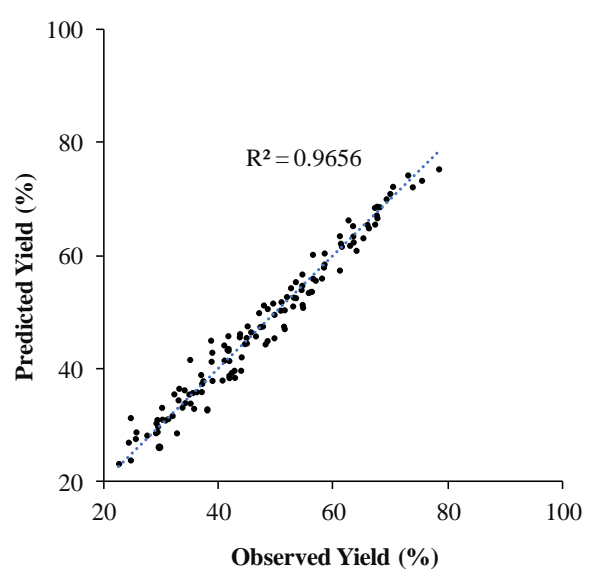


logsig-purelin-logsig (training)

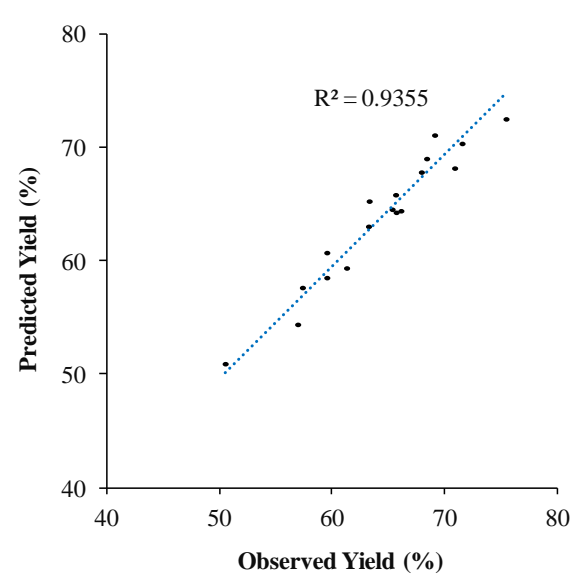

logsig-purelin-logsig (validation)

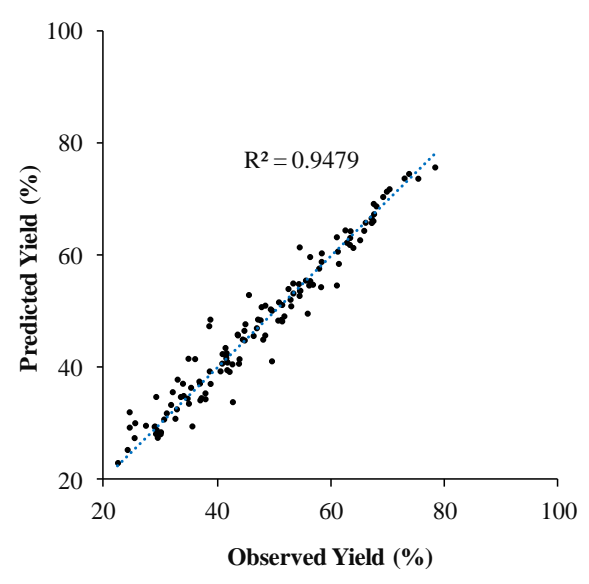

purelin-logsig-tansig (training)

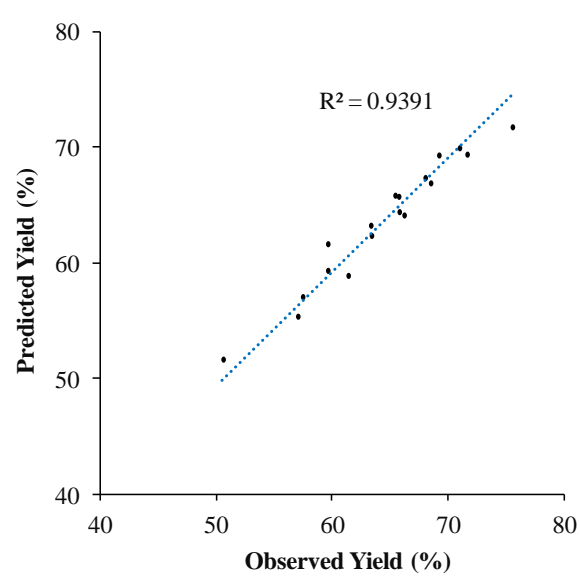

purelin-logsig-tansig (validation)



# Application of Artificial Neural Network to Predict Biodiesel Yield from Waste Frying Oil Transesterification

Authors

## ABSTRACTS

Used frying oil (UFO) has great potential as feedstock for biodiesel production. This study aims to develop an artificial neural network (ANN) model to predict biodiesel yield produced from base-catalyzed transesterification reaction of UFO. The experiment was performed with 100 ml of UFO at three different molar ratios (oil:methanol), namely 1:4, 1:5, 1:6, reaction temperatures of 30 to 55 °C (raised by 5 °C) and reaction time of 0.25, 0.5, 1, 2, 3, 6, and 10 min. Prediction model was based on ANN back propagation type with supervised learning method. Validation model was carried out using data set measured at reaction duration of 8 min. The results showed that network architecture of the ANN model consists of four layers, namely input layer, first hidden layer, second hidden layer, and output layer. The training used in this work is the Levenberg-Marquardt train type with learning rate of 0.001 and activation function of purelin-logsig-purelin. The model validation revealed that predicted yield is excellently accurate with %RMSE value of 1.51% and the coefficient of determination ( $R^2$ ) of 0.946. Prediction values resulted from the ANN model were better than those of first-order kinetics.

© 2019 Tim Pengembang Jurnal UPI

## ARTICLE INFO

### Article History:

Received 16 Aug 2018

Revised 20 Aug 2018

Accepted 25 Aug 2018

Available online 09 Sep 2018

### Keywords:

biodiesel,  
ANN model,  
waste frying oil,  
transesterification,  
activation function,  
yield.

## 1. INTRODUCTION

Biodiesel is an alternative energy source for diesel fuel offering several advantages. First, biodiesel is made from vegetable oils or animal fats so it is classified as a renewable, biodegradable, and nontoxic energy source (Khan *et al.*, 2013). Biodiesel, therefore, is ecologically friendly because

the production and application of biodiesel results in lower greenhouse gas (GHG) emissions than petroleum fuels do. Studies in the United States (Sheehan *et al.*, 1998) revealed that based on life cycle analysis biodiesel is able to decrease GHG emission 78% as compared to petroleum diesel fuel. Other works using various feedstock in different countries also reported that


biodiesel producing lower GHG such as in India with *jatropha curcas* (Kumar *et al.*, 2012; Achten *et al.*, 2010), China with various oil (Hou *et al.*, 2011; Guo *et al.*, 2010), Southeast Asia (Indonesia, Malaysia, Thailand) with palm oil (Siregar *et al.*, 2015; Harsono *et al.*, 2012; Hassan *et al.*, 2011; Silalertruksa & Gheewala, 2012), Brazilia with soybean (Oliveira *et al.*, 2017), and Europe with rapeseed oil (Malça & Freire, 2011). Second, unlike fossil fuels which are bestowed to a few countries, oil-plants producing biodiesel feedstock are spread throughout the world, so that geopolitically biodiesel can be one that can increase energy security (Paltsev, 2016).

Utilization of vegetable oils as feedstock for biodiesel production, however, is more expensive because the cost of raw materials can reach 80 to 85% of operational costs (Canakci & Sanli, 2008; Hindryawati *et al.*, 2014). One potential cheaper raw material is used frying oil (UFO), which is not allowable to be dumped directly because it has a high COD value. In addition, UFO contains toxic compound formed during high temperature heating like hydroperoxides and aldehydes. When these compounds ingested through consumed food they may be responsible for increasing blood pressure (hypertension) and attributable to cardiovascular diseases and diabetes (Leong *et al.*, 2015; Jaarin *et al.*, 2016). Repeatedly heated cooking oils even produce carcinogenic compounds such as polycyclic aromatic hydrocarbons that relate to the incidence of tumor and cancer diseases (Ganesan *et al.*, 2017). Therefore, using UFO repeatedly to fry food or to make food-related ingredients, such as chili sauce, may endanger human health.

The potential of used cooking oil in Indonesia is quite large because the consumption of cooking oil shows a tendency to increase from 0.198 L/capita per week in 2007 to 0.205 in 2012 and 0.221

in 2017 (BPS, 2018). This figure is very close with the study in Bogor (Fujita *et al.*, 2013), which found cooking oil consumption of one family is 3L/month or 36 L/year. With a proper management, UFO has great potential to be used as energy sources in the form of biodiesel to replace diesel oil (Chhetri *et al.*, 2008). The development of biodiesel from UFO will provide a healthier choice of using UFO.

The reaction usually chosen to produce biodiesel from oil is transesterification with methanol and a base catalyst (Fajardo *et al.*, 2011). For every mol of triglyceride or vegetable oil, the process required stoichiometrically three mols of methanol to produce three mols biodiesel or FAME (fatty acid methyl ester) and one mol glycerol, as presented in Equation (1).

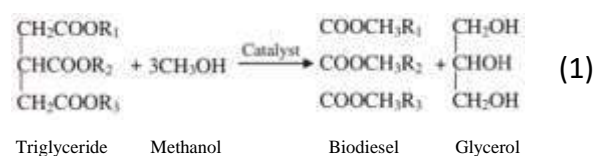

Important factors in biodiesel synthesis, among other, include molar ratio (MR) of oil to methanol, reaction temperature ( $T$ ), and reaction duration ( $t$ ). Transesterification is a reversible and equilibrium reaction so that to obtain maximum yield should be carried out with excess of methanol (Ejikeme *et al.*, 2010), rather than 1:3 as in Equation 1. The disadvantage of this reaction is that there may be a side reaction in the form of saponification which will consume the catalyst so that reducing biodiesel yield, especially if the FFA content in UFO is quite high (Narasimharao *et al.*, 2007). The relation of biodiesel yield and dependent variables is unlinear and so complex that require a robust model to accurately predict the yield. Conventional approaches such as kinetics analysis can be applied successfully in certain constrained environments, but it is not flexible in different conditions. The complexity of these relationships can be

analyzed by using ANN (artificial neural network) models so as to produce high accuracy biodiesel yield prediction (Lavalle *et al.*, 2012; Seo, 2013).

ANN model has been an important tool to solve many problems in a wide range of areas such as pattern recognition, function approximation, categorization, prediction, optimization, associative memory, and control (Jain *et al.*, 1996). Recently, ANN model is explored in biodiesel production yield from the transesterification reaction (Yuste & Dorado, 2006). The ANN model has been used, for instance, to predict biodiesel viscosity from vegetable oils and animal fats (Jahirul *et al.*, 2014).

The general objective of this study is to predict biodiesel yield resulted from UFO transesterification reaction which is broke down into three specific objectives. First, examine relationship between molar ratio, reaction temperature and reaction time as independent variables on biodiesel yield as the dependent variable. Second, develop ANN models for UFO transesterification reaction. Third, validate ANN models that have been made to obtain the most accurate one to predict biodiesel yield.


## 2. MATERIALS AND METHODS

### 2.1. Biodiesel synthesis

Biodiesel was synthesized using UFO collected from fried food pedlars in the vicinity of the University of Lampung. Important variables including molar ratio, reaction temperature, and reaction time were varied to obtain biodiesel yield. Detail of materials and processing method have been recently reported elsewhere (Authors, 2019).

### 2.2. ANN model development

Figure 1 showed step-by-step ANN model development to validation. The ANN model to be developed is back-propagation type with supervised learning method.

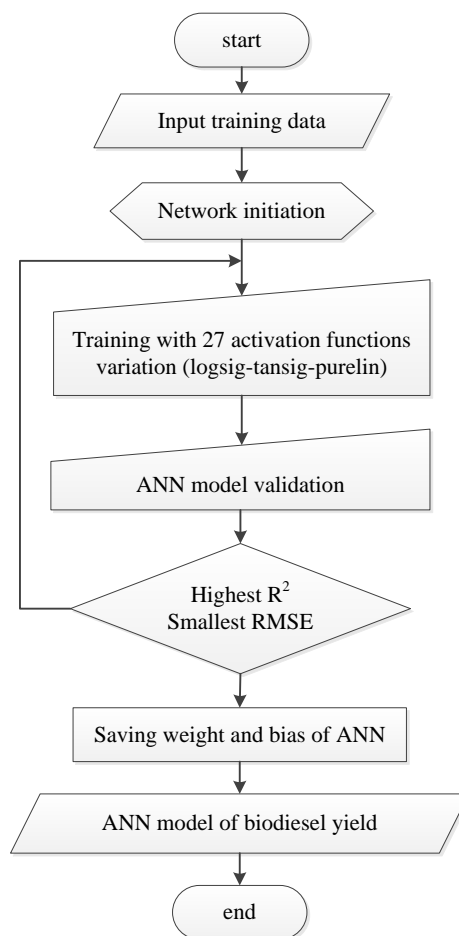

**Figure 1.** Flowchart for ANN model development and validation

Figure 2 presented form of ANN model consisting of three layers for biodiesel yield prediction based on molar ratio, reaction temperature and reaction time. The model consists of three layers, namely input layer, hidden layer, and output layer. Due to complexity of involved variables, two hidden layers are used, each with five neurons or nodes. Karsoliya (2012) guided that neuron number of hidden layer is less than twice of the number of neurons in input layer.

The ANN model works in three steps, namely feed forward, back-propagation, and weight adjustments which are calculated based on the established equations (Widodo *et al.*, 2013). At the first step, each input node receives an input value,  $x_i$  ( $i = 1, 2, 3, \dots, n$ ) and forwards the signal to all nodes in



the hidden layer. Each hidden layer node will add all the weighted input signals ( $z_{in_j}$ ), which is  $x_i$  multiplied by the weight ( $v_{ij}$ ) and added by received bias,  $b_j$  ( $j = 1, 2, 3, \dots, p$ ) as in Equation 2. By using activation function as in Equation 3, the signal coming out from the hidden layer node is then calculated.

$$z_{in_j} = b_j + \sum_{i=1}^n x_i v_{ij} \quad (2)$$

$$z_j = f(z_{in_j}) \quad (3)$$


In this work, three activation functions (logsig, tansig, and purelin) were selected that making 27 combinations need to be

validated. These three functions are defined and presented graphically in Figure 3.


Each output layer node,  $y_k$  ( $k = 1, 2, 3, \dots, m$ ), will add up all signals from the hidden layer nodes (multiplied by weight,  $w_{jk}$  and added bias,  $b_k$ ) as in Equation 4. The signal coming out of the output node is calculated by using activation function (Equation 5).

$$y_{in_k} = b_k + \sum_{j=1}^p z_j w_{jk} \quad (4)$$

$$y_k = f(y_{in_k}) \quad (5)$$

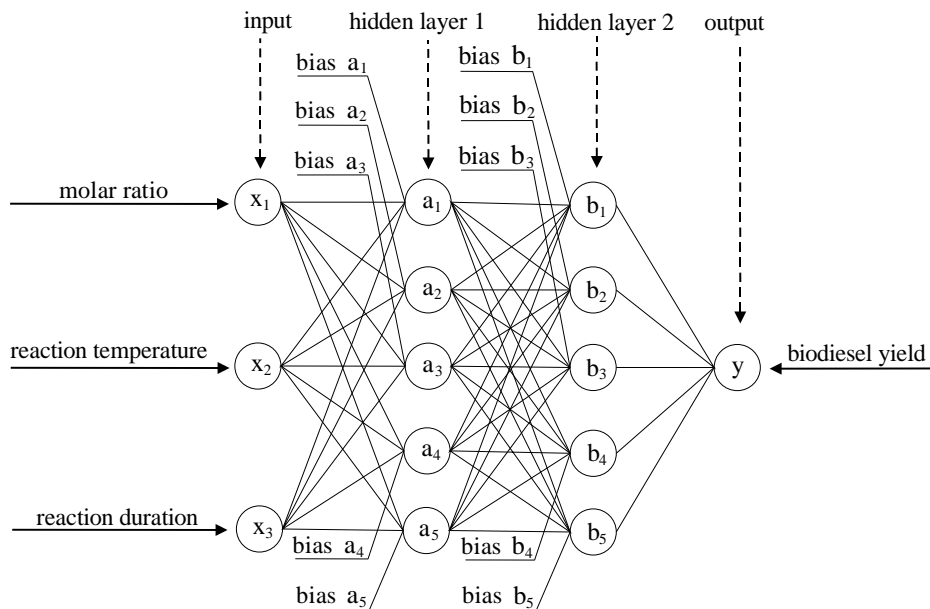

**Figure 2.** Form of ANN model consisting of three layers for biodiesel yield prediction

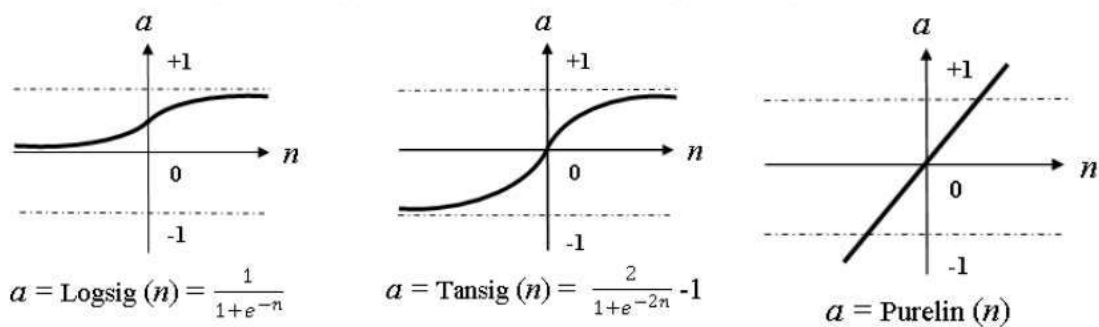

**Figure 3.** Definition and graphical representation of logsig, tansig, and purelin activation functions

The second step (back-propagation) starts by calculating the error information ( $\delta_k$ ) between each output node ( $y_k$ ) with target value ( $t_k$ ) associated with data for learning as in Equation 6. In order to correct the weight and bias values, correction for weight ( $\Delta w_{jk}$ ) and bias ( $\Delta b_k$ ) were calculated using the predetermined learning rate ( $\alpha$ ) as given in Equation 7 and Equation 8.

$$\delta_k = (t_k - y_k) f'(y_{in_k}) \quad (6)$$

$$\Delta w_{jk} = \alpha \delta_k z_j \quad (7)$$

$$\Delta b_k = \alpha \delta_k \quad (8)$$

The third step (weight adjustment) starts by calculating the error information ( $\delta_j$ ) between each hidden layer node ( $z_j$ ,  $j = 1, 2, 3, \dots, p$ ) with the nodes in the input layer as in Eq. 9. Then calculate the correction weight ( $\Delta v_{ij}$ ) and correction of bias ( $\Delta b_j$ ) to correct the weight value ( $v_{ij}$ ) and bias value ( $b_j$ ) as in Equation 10 and Equation 11 by using learning rate ( $\alpha$ ).

$$\delta_j = \left( \sum_{k=1}^m \delta_k w_{jk} \right) f'(z_{in_j}) \quad (9)$$

$$\Delta v_{ij} = \alpha \delta_j x_j \quad (10)$$

$$\Delta b_j = \alpha \delta_j \quad (11)$$

In the weight adjustment step, each output unit ( $y_k$ ) is fixed by the new value of its weight and bias as in Equation 12 and Equation 13 (Widodo *et al.*, 2013). Similarly, Equation 14 and Equation 15 was used to fix each hidden unit ( $z_j$ ).

$$w_{jk} \text{ (new)} = w_{jk} \text{ (old)} + \Delta w_{jk} \quad (12)$$

$$b_k \text{ (new)} = b_k \text{ (old)} + \Delta b_k \quad (13)$$

$$v_{ij} \text{ (new)} = v_{ij} \text{ (old)} + \Delta v_{ij} \quad (14)$$

$$b_j \text{ (new)} = b_j \text{ (old)} + \Delta b_j \quad (15)$$

### 2.3. Model training

The ANN training process is preceded by network initialization. Network initialization

is to determine the initial network architecture so that the network training process can be carried out. The learning rate ( $\alpha$ ) used to train ANN models is 0.001 (Amini, 2008). The type of training used is the trainlm (Levenberg-Marquardt) training type (Anandhi *et al.*, 2012). The maximum number of iterations is set at 1000 and the smallest Mean Square Error (MSE) is 0.00001 (Kusuma & Abadi, 2011). Variations in activation functions used by 27 variations are combinations of logsig-tansig-purelin (Dorofki *et al.*, 2012). Table 1 was reproduced from our previous work (Authors, 2019) for the training purpose. All data were used for training set data except values collected at reaction time of eight minutes.

### 2.4. Model validation

Model validation was performed to assess the accuracy between predicted and observed values. In this case, validation is evaluated by using relative root mean square error (*RRMSE*) and coefficient of determination ( $R^2$ ) with a target to obtain the smallest *RRMSE* and the highest  $R^2$  values.

$$RRMSE = \frac{\sqrt{\frac{1}{n} \sum_{i=1}^n (O_i - P_i)^2}}{\bar{O}} \times 100 \quad (16)$$

$$R^2 = 1 - \frac{\sum_{i=1}^n (O_i - P_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (17)$$

where  $n$  is number of data,  $O_i$  is observed value of  $i^{\text{th}}$ ,  $P_i$  is predicted value of  $i^{\text{th}}$ , and  $\bar{O}$  is average observed value. The predicted yield is classified as excellent with *RRMSE* < 10%, good (10-20%), fair (20-30%), and poor (> 30%) (Li *et al.*, 2013).

The  $R^2$  is used to assess the closeness of calculated values to the measurement data. The prediction values are considered excellent if  $R^2 \approx 1$  (Despotovic *et al.*, 2016).

**Tabel 1.** Biodiesel yield at different *MR*, *T*, and *t* used as training set data

Time (min)	Biodiesel yield (%)					
	30°C	35°C	40°C	45°C	50°C	55°C
<b>MR 1:4</b>						
0.25	24.27	25.49	29.38	35.67	24.63	29.26
0.5	29.10	31.16	35.06	37.28	29.30	37.07
1	34.83	37.01	42.23	40.93	36.15	41.64
2	38.72	40.98	48.14	47.02	38.84	55.98
3	41.69	46.46	51.37	53.08	45.63	61.12
6	47.69	52.96	56.43	61.47	54.57	65.93
8	50.52	56.97	61.32	63.33	65.37	69.15
10	53.43	58.44	65.22	67.23	69.27	73.04
<b>MR 1:5</b>						
0.25	30.14	25.60	32.68	30.70	27.49	29.57
0.5	32.95	37.99	37.97	32.21	34.14	31.92
1	36.90	41.81	41.85	34.98	43.97	43.88
2	41.69	44.89	44.83	45.01	50.79	47.23
3	43.64	51.49	49.71	50.92	54.55	54.61
6	53.46	55.67	58.00	56.41	63.41	63.53
8	57.39	59.56	59.56	66.15	68.44	70.93
10	61.29	63.46	67.27	68.09	70.40	73.84
<b>MR 1:6</b>						
0.25	38.88	35.44	33.64	24.62	30.08	22.57
0.5	41.82	42.72	40.63	34.01	42.80	29.02
1	43.69	48.50	44.54	41.50	49.69	33.07
2	47.86	51.49	48.52	49.47	51.87	38.64
3	52.59	56.24	54.43	56.91	58.34	54.69
6	58.46	64.02	62.90	61.11	62.62	67.56
8	63.27	65.73	65.68	67.97	71.59	75.50
10	66.19	67.67	67.61	69.92	75.46	78.44

### 3. RESULTS AND DISCUSSION

#### 3.1. ANN model for yield prediction

Table 2 shows a summary of the results from training and validation of 27 architectural combination models of logsig-tansig-purelin activation functions. Model accuracy is evaluated from the *RRMSE* and *R*<sup>2</sup> values of the models. We can see that 24 of 27 combination models demonstrate excellent accuracy with *RRMSE* values less than 10% (between 3.32 and 6.90%) and *R*<sup>2</sup> more than 0.90 (between 0.9364 and 0.9860). The remaining three models can still be grouped as good models with *RRMSE* values between

11 and 12.5% and *R*<sup>2</sup> values between 0.7589 and 0.8307. During the training session, the best architecture is tansig-tansig-purelin with *RRMSE* value of 3.32% and *R*<sup>2</sup> of 0.9860. However, this model fails as the best model during validation session. The *RRMSE* value of this model rises to 4.53% and its *R*<sup>2</sup> decreases significantly to 0.8382.

During the validation session, 25 of the 27 models meet the excellent criteria with *RRMSE* values of less than 10%. Two models fall into fair group with *RRMSE* values of 23.71% and 27.95%. Even the three lowest models previously mentioned (purelin-

purelin-purelin, purelin-purelin-tansig, and purelin-purelin-logsig) which have *RRMSE* values greater than 10% in the training session, exhibit excellent *RRMSE* (< 10%) during validation. However, if the models are examined from its determination coefficients, some of the best models have very low  $R^2$  values, five models have even negative  $R^2$ . This means that the accuracy of the results during the training session does not always reflect that the validation results will also be accurate. The mentioned three lowest models in the training session still showed the worst performance with a negative  $R^2$  values. Nine architectural models defend themselves as excellent

models with  $R^2$  values greater than 0.90 and *RRMSE* values during validation session are lower than those of training session.


Based on the discussion above, the selection of the best activation function network architecture that in turn will be used as a prediction model must be based on both the smallest *RRMSE* value and the highest  $R^2$  value in the validation session. A low *RRMSE* value indicates a small deviation from all data so that the prediction model built successfully achieves a high level of accuracy. On the other side, high  $R^2$  value indicates a very close relationship between calculated biodiesel yields and observed yield values.

**Table 2.** Result from training and validation of ANN models


Activation function	Training		Validation	
	<i>RRMSE</i> (%)	$R^2$	<i>RRMSE</i> (%)	$R^2$
logsig-logsig-logsig	4.22	0.9772	5.15	0.8049
logsig-logsig-tansig	3.79	0.9817	3.83	0.7978
logsig-tansig-logsig	5.20	0.9648	6.34	-0.8360
logsig-tansig-tansig	3.87	0.9809	4.86	0.7865
tansig-logsig-logsig	3.99	0.9793	27.95	-0.2730
tansig-tansig-logsig	3.66	0.9829	4.04	0.8332
tansig-tansig-tansig	3.49	0.9843	2.77	0.9110
tansig-logsig-tansig	5.14	0.9658	4.98	0.3850
logsig-tansig-purelin	5.25	0.9642	6.14	0.8638
logsig-logsig-purelin	4.24	0.9770	3.02	0.9099
tansig-logsig-purelin	5.12	0.9661	23.71	0.0903
tansig-tansig-purelin	3.32	0.9860	4.53	0.8382
<b>logsig-purelin-logsig</b>	<b>5.14</b>	<b>0.9656</b>	<b>2.41</b>	<b>0.9355</b>
logsig-purelin-tansig	6.16	0.9499	3.20	0.9290
tansig-purelin-logsig	5.51	0.9597	4.11	0.8855
tansig-purelin-tansig	6.42	0.9444	3.30	0.8993
purelin-logsig-logsig	6.15	0.9502	2.73	0.9342
<b>purelin-logsig-tansig</b>	<b>6.28</b>	<b>0.9479</b>	<b>2.44</b>	<b>0.9391</b>
purelin-tansig-logsig	6.90	0.9364	3.51	0.9074
purelin-tansig-tansig	6.12	0.9512	3.29	0.8535
purelin-purelin-purelin	12.51	0.7589	5.98	-1.2950
purelin-purelin-tansig	10.99	0.8307	8.50	-34.7200
purelin-purelin-logsig	11.51	0.8104	8.14	-15.0800
purelin-tansig-purelin	6.40	0.9460	5.89	0.7532
purelin-logsig-purelin	6.47	0.9448	2.68	0.9042
logsig-purelin-purelin	6.89	0.9369	2.91	0.9002
tansig-purelin-purelin	6.71	0.9403	7.10	0.4931

Among the excellent models appeared during validation session, ANN models with activation function architecture of logsig-purelin-logsig and purelin-logsig-tansig are the best two with respectively *RRMSE* of 2.41% and 2.44%, and  $R^2$  of 0.9355 and 0.9391. During the training session these

models (logsig-purelin-logsig and purelin-logsig-tansig) are also among the excellent models with *RRMSE* less than 10% and  $R^2$  greater than 0.90. Figure 4 and 5 show the scatter between the predicted values of bio-diesel yield observation values, both in training sessions and validation sessions.

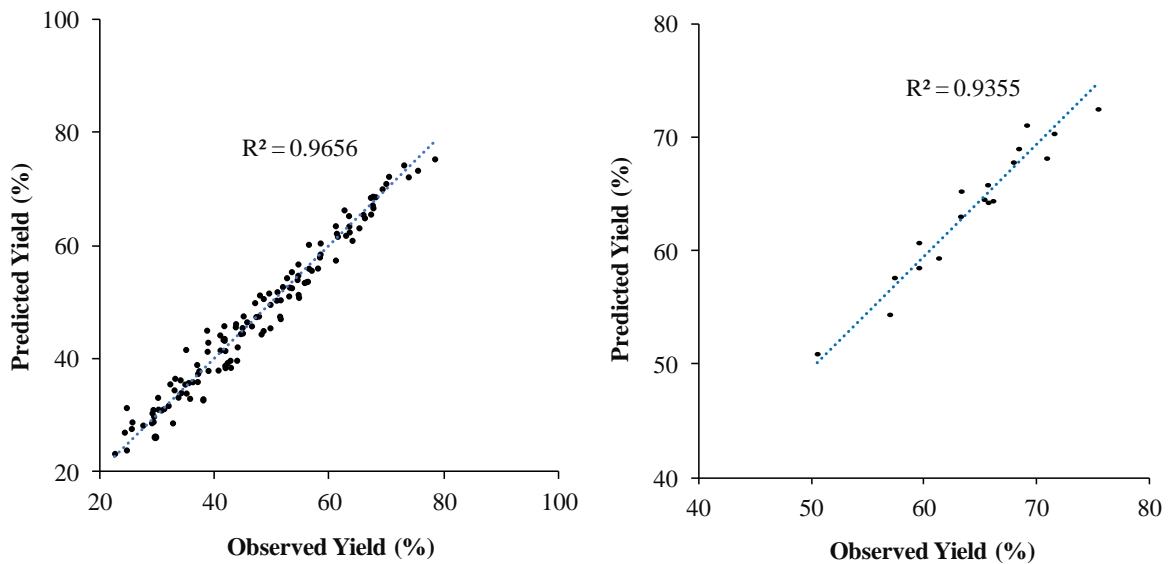

**Figure 4.** Scatter diagram of observation vs. prediction yield from ANN model with architecture of logsig-purelin-logsig: training result (left) and validation result (right)

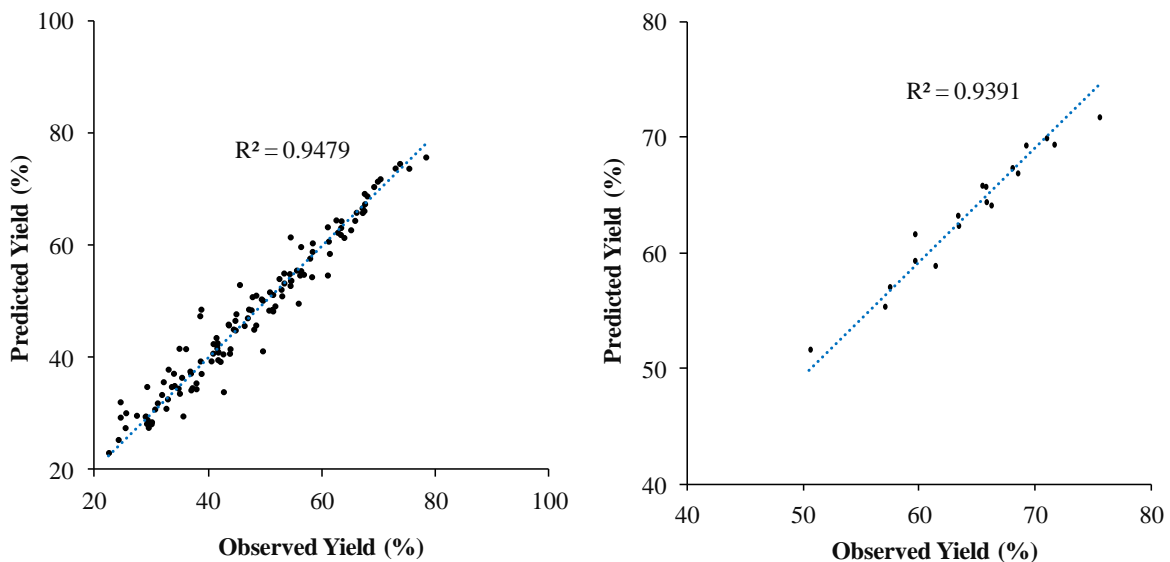

**Figure 5.** Scatter diagram of observation vs. prediction yield from ANN model with architecture of purelin-logsig-tansig: training result (left) and validation result (right)

Previously we have reported the prediction of biodiesel yield at the same conditions using first order kinetic approach (Authors, 2019). The result showed excellent predictions with *RRMSE* of 3.39%, but  $R^2$  value of 0.8454. Compared to the results from this study, it is clear that application of ANN model provide better prediction than those of first order kinetic.

#### 4. CONCLUSION

The network architecture of the ANN model consists of three layers with three nodes in the input layer, five nodes in the first and the second hidden layer, and one node in the output layer. The type of training used is the Levenberg-Marquardt (*trainlm*) with a learning rate of 0.001. Twenty seven architectural combinations of three activation function (logsig, tansig, purelin) had been trained using 126 data set of biodiesel yield observed at three different molar ratios, six different temperatures and seven points reaction time, and had been

validated using 18 data set observed at reaction time of eight minutes. Results showed that models with activation function of logsig-purelin-logsig and purelin-logsig-tansig be the best with *RRMSE* of 2.41% and 2.44%, respectively, and  $R^2$  of 0.9355 and 0.9391%, respectively.

#### 5. ACKNOWLEDGEMENTS

The research was financially supported by the DGHE (Directorate General of Higher Education), the Ministry of Research, Technology and Higher Education, through research scheme of FUNDAMENTAL with contract: 071/SP2H/LT/DRPM/IV/2017585 (June 2, 2017). The views expressed in this paper, however, are solely of the authors.

#### 6. AUTHORS' NOTE

The authors declare that there is no conflict of interest regarding the publication of this article. Authors confirmed that the data and the paper are free of plagiarism.

#### 7. REFERENCES

- Achten, W.M.J., Almeida, J., Fobelets, V., Bolle, E., Singh, V.P., Tewari, D.N., Verchot, L.V., Muys, B. (2010) Life cycle assessment of Jatropha biodiesel as transportation fuel in rural India. *Applied Energy*, **87**, 3652–3660. DOI: 10.1016/j.apenergy.2010.07.003.
- Amini, J. (2008). Optimum learning rate in back-propagation neural network for classification of satellite images (IRS-1D). *Scientia Iranica*, **15**, 558-567.
- Anandhi, V., R. Manicka Chezian, R. M., & Parthiban, K.T. (2012). Forecast of demand and supply of pulpwood using Artificial Neural Network. *International Journal of Computer Science and Telecommunications*, **3**, 35-38.
- BPS (Statistics Indonesia). (2018). Rata-rata konsumsi per kapita seminggu beberapa macam bahan makanan penting, 2007-2017. <https://www.bps.go.id> (January 6, 2019).
- Canakci, M. & Gerpen, J.V. (1999) Biodiesel production via acid catalysis. *Transactions of the ASAE*, **42(5)**, 1203-1210. DOI: 10.13031/2013.13285.
- Chhetri, A. B., Watts, K. C., & Islam, M.R. (2008). Waste cooking oil as an alternate feedstock for biodiesel production. *Energies*, **1**, 3-18.

- Dorofki, M., Elshafie, A. H., Jaafar, O., karim, O. A., & Mastura, S. (2012). Comparison of Artificial Neural Network transfer functions abilities to simulate extreme runoff data. *IPCBE*, **33**, 39-44.
- Despotovic, M., Nedic, V., Despotovic, D. & Cvetanovic, S. (2016) Evaluation of empirical models for predicting monthly mean horizontal diffuse solar radiation. *Renewable and Sustainable Energy Reviews*, **56**, 246-260.
- Ejikeme, P.M., Anyaogu, I.D., Ejikeme, C.L., Nwafor, N.P., Egbuonu, C.A.C., Ukogu, K., & Ibemesi, J.A. (2010). Catalysis in biodiesel production by transesterification processes – An insight. *E-Journal of Chemistry* **7(4)** : 1120-1132.
- Fajardo, C.A.G., Guerrero-Romero, A., & Sierra, F.E. (2011). Biodiesel production from waste cooking oil. In *Biodiesel - Feedstocks and Processing Technologies* (Ed. Stoytcheva, M). Intech, Rijeka, 23-44.
- Fujita, H., Nakano, K., Okuhara, K., Koide, N., Supriatna, D., & Prakoso, J.H. 2013. GHG Emission reduction by waste cooking oil recycling in environmental partnership program of Bogor city. *LCA AgriFood Asia Workshop*. Jakarta, 24 June 2013.
- Ganesan, K., Sukalingam, K., & Xu, B. (2017) Impact of consumption of repeatedly heated cooking oils on the incidence of various cancers – A critical review. *Critical Reviews in Food Science and Nutrition*, DOI: 10.1080/10408398.2017.1379470
- Guo, R., & Hanaki, K. (2010). Potential and life cycle assessment of biodiesel production in China. *Journal of Renewable and Sustainable Energy*, **2(3)**, 033107. DOI: 10.1063/1.3449298
- Harsono, S.S., Prochnow, A., Grundmann, P., Hansen, A., & Hallmann, C. (2012). Energy balances and greenhouse gas emissions of palm oil biodiesel in Indonesia. *GCB Bioenergy*, **4**, 213–228. DOI: 10.1111/j.1757-1707.2011.01118.x
- Authors (2019)
- Hassan, M.N.A., Jaramillo, P., & Griffin, W.M. (2011) Life cycle GHG emissions from Malaysian oil palm bioenergy development: The impact on transportation sector's energy security. *Energy Policy*, **39**, 2615–2625. DOI: 10.1016/j.enpol.2011.02.030.
- Hindryawati, N., G.P. Maniam, M.R. Karim and K.F. Chong. 2014. Transesterification of used cooking oil over alkali metal (Li, Na, K) supported rice husk silica as potential solid base catalyst. *Engineering Science and Technology, an International Journal*, **17**: 95-103.
- Hou, J., Zhang, P. Yuan, X., & Zheng, Y. (2011) Life cycle assessment of biodiesel from soybean, jatropha and microalgae in China conditions. *Renewable and Sustainable Energy Reviews*, **15**, 5081–5091. DOI: 10.1016/j.rser.2011.07.048.
- Jaarin, K., Masbah, N., & Kamisah, Y. (2018) Heated oil and its effect on health. In *Food Quality: Balancing Health and Disease* (Eds. Holban, A.M. & Mihai, A.), Elsevier Inc., 315-337. DOI: 10.1016/B978-0-12-811442-1.00010-9.

- Jahirul, M.I., Senadeera, W., Brown, R.J., & Moghaddam, L. (2014). Estimation of biodiesel properties from chemical composition – an Artificial Neural Network (ANN) approach. *International Scientific Journal of Environmental Science*, **3(3)**, 1-7. DOI:
- Jain, A.K., Mao, J., & Mohiudin, K.M. (1996). Artificial neural network : A tutorial. *Computer*, **March**, 31-44.
- Karsoliya, S. (2012). Approximating number of hidden layer neurons in multiple hidden layer BPNN architecture. *International Journal of Engineering Trends and Technology*, **3**, 714-717. DOI:
- Khan, M.M., Khan, R.U., Khan, F.Z. & Athar, M. (2013) Impacts of biodiesel on the environment. *International Journal of Environmental Engineering and Management*, **4(4)**, 345-350.
- Kumar, S., Singh, J., Nanoti, S.M., & Garg, M.O. (2012). A comprehensive life cycle assessment (LCA) of Jatropha biodiesel production in India. *Bioresource Technology*, **110**, 723-729. DOI: 10.1016/j.biortech.2012.01.142.
- Kusuma, I. W. & Abadi, A. M. (2011). Aplikasi model backpropagation neural network untuk perkiraan produksi tebu pada PT. Perkebunan Nusantara IX. *Seminar Nasional Matematika dan Pendidikan Matematika*. 3 Desember 2011. Yogyakarta.
- Lavalle, A., Curia, L., Lavalle, L., Giaveno, A. and Donati, E. (2012). Artificial Neural Network to predict the growth of leptospirillum ferrooxidans in 9K defined medium. *International Journal of Engineering Research and Applications (IJERA)* **2** : 1406-1416
- Li, M-F., Tang, X-P., Wu, W. & Liu, H-B. (2013) General models for estimating daily global solar radiation for different solar radiation zones in mainland China. *Energy Conversion and Management*, **70**, 139–148.
- Leong, X.F., Ng, C.Y., Jaarin, K., & Mustafa, M.R. (2015). Effects of repeated heating of cooking oils on antioxidant content and endothelial function. *Austin Journal of Pharmacology and Therapeutics* **3(2)** : 1-7.
- Malça, J. & Freire, F. (2011) Life-cycle studies of biodiesel in Europe: A review addressing the variability of results and modeling issues. *Renewable and Sustainable Energy Reviews*, **15**, 338–351.
- Narasimharao, K., Lee, A., & Wilson, K. (2007). Catalysts in production of biodiesel: A review. *Journal of Biobased Materials and Bioenergy* **1(1)** : 1–12
- Oliveira, F. C. De & Coelho, S.T. (2017) History, evolution, and environmental impact of biodiesel in Brazil: A review. *Renewable and Sustainable Energy Reviews*, **75**, 168-179. DOI: 10.1016/j.rser.2016.10.060.
- Paltsev, S. (2016) The complicated geopolitics of renewable energy. *Bulletin of the Atomic Scientists*, **72(6)**, 390-395, DOI: 10.1080/00963402.2016.1240476.
- Seo, K. (2013). A Simulation study on an Artificial Neural Network based automatic control system of a plant factory. *International Journal of Control and Automation*, **6**, 127-136. DOI:



- Sheehan, J., Camobreco, V., Duffield, J., Graboski, M., & Shapouri, H. (1998) Life cycle inventory of biodiesel and petroleum diesel for use in an urban bus. Final report for U.S. Dept. of Energy's Office of Fuel Development and the U.S. Dept. of Agriculture's Office of Energy, by the National Renewable Energy Laboratory, NREL/SR-580-24089.
- Silalertruksa, T. & Gheewala, S.H. (2012) Environmental sustainability assessment of palm biodiesel production in Thailand. *Energy*, **43**, 306-314. DOI: 10.1016/j.energy.2012.04.025.
- Siregar, K., Tambunan, A.H., Irwanto, A.K., Wirawan, S.S. & Araki, T. (2015) A comparison of life cycle assessment on oil palm (*Elaeis guineensis* Jacq.) and physic nut (*Jatropha curcas* Linn.) as feedstock for biodiesel production in Indonesia. *Energy Procedia*, **65**, 170-179.
- Widodo, P.P., Handayanto, R.T., & Herlawati (2013). *Penerapan Data Mining dengan MATLAB*. Rekayasa Sains, Bandung.
- Yuste, A.J. & Dorado, M.P. (2006) A neural network approach to simulate biodiesel production from waste olive oil. *Energy Fuels*, **20(1)**, 399–402. DOI: 10.1021/ef050226t.



AGUS HARYANTO <agus.haryanto@fp.unila.ac.id>

---

## [IJOST] Submission Acknowledgement

---

**Asep Bayu Dani nandiyanto** <ejournal@upi.edu>  
To: Mr Agus Haryanto <agus.haryanto@fp.unila.ac.id>

Mon, Feb 4, 2019 at 7:01 PM

Mr Agus Haryanto:

Thank you for submitting the manuscript, "Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification" to Indonesian Journal of Science and Technology. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Manuscript URL:  
<http://ejournal.upi.edu/index.php/ijost/author/submission/15334>  
Username: agusharyid\_65

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

Asep Bayu Dani nandiyanto  
Indonesian Journal of Science and Technology

---

Indonesian Journal of Science and Technology  
<http://ejournal.upi.edu/index.php/ijost>

**[IJOST] Complete the revision until 7 Feb 2019**

2 messages

**Dian Herdiana** <ejournal@upi.edu>

Thu, Feb 14, 2019 at 11:37 AM

To: Mr Agus Haryanto &lt;agus.haryanto@fp.unila.ac.id&gt;

Cc: Tri Wahyu Saputra &lt;poox.saputra@gmail.com&gt;, Mareli Telaumbanua &lt;marelitelaumbanua@gmail.com&gt;, Amiera Citra Gita &lt;citraamieria@gmail.com&gt;

Dear authors:

Please complete the revision until 21 Feb 2019. If you can not address the revision until 21 Feb 2019, the paper will be rejected.

Indonesian Journal of Science and Technology, "Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification".

Please find the following comments:

Reviewer 1:

Authors wrote well. Minor correction: Discussion must be compared with references. Other is OK.

Reviewer 2:

1. Please complete the author names.
2. The authors should briefly explain the content of data training used in this research.
3. The authors should present the parameters assigned in the experiments.

Best regards,

Editor

---

Indonesian Journal of Science and Technology  
<http://ejournal.upi.edu/index.php/ijost>

**AGUS HARYANTO** <agus.haryanto@fp.unila.ac.id>

Tue, Feb 19, 2019 at 3:20 PM

To: Dian Herdiana &lt;ejournal@upi.edu&gt;

Dear Dr. Herdiana,

I've revised the manuscript according to the reviewer recommendations.  
I've also uploaded the file through OJS.  
In case there is a problem, I also attached the revised file here.  
If there is any thing I can do, please let me know.

Regards,

Agus Haryanto

[Quoted text hidden]



# Application of Artificial Neural Network to Predict Biodiesel Yield from Waste Frying Oil Transesterification

Agus Haryanto<sup>1\*</sup>, Tri Wahyu Saputra<sup>1</sup>, Mareli Telaumbanua<sup>1</sup>, Amiera Citra Gita<sup>1</sup>

<sup>1</sup>Agricultural Engineering Department, Faculty of Agriculture, University of Lampung, Jl. Soemantri Brojonegoro No. 1, Bandar Lampung, Indonesia 35145

Correspondence: E-mail: [agus.haryanto@fp.unila.ac.id](mailto:agus.haryanto@fp.unila.ac.id)

## ABSTRACTS

Used frying oil (UFO) has great potential as feedstock for biodiesel production. This study aims to develop an artificial neural network (ANN) model to predict biodiesel yield produced from base-catalyzed transesterification of UFO. The experiment was performed with 100 ml of UFO at three different molar ratios (oil:methanol), namely 1:4, 1:5, 1:6, reaction temperatures of 30 to 55 °C (raised by 5 °C) and reaction time of 0.25, 0.5, 1, 2, 3, 6, 8, and 10 min. Prediction model was based on ANN model consisting of three layers with 27 combinations of three activation functions (tansig, logsig, purelin). All the 27 activation function architectures were trained using Levenberg-Marquardt train type with 126 data set (87.5%) and learning rate of 0.001. Model validation used 18 data set (12.5%) measured at reaction time of 8 min. Results show that two ANN models with activation function of logsig-purelin-logsig and purelin-logsig-tansig be the best with *RRMSE* of 2.41% and 2.44%, respectively, and *R*<sup>2</sup> of 0.9355 and 0.9391, respectively. Predictions of biodiesel yield using ANN models are significantly better than those of first-order kinetics.

© 2019 Tim Pengembang Jurnal UPI

## ARTICLE INFO

### Article History:

Received 04 Feb 2019

Revised 18 Feb 2019

Accepted 25 Aug 2019

Available online 09 Sep 2019

### Keywords:

biodiesel,  
ANN model,  
waste frying oil,  
transesterification,  
activation function,  
yield.

## 1. INTRODUCTION

Biodiesel is an alternative energy source for diesel fuel offering several advantages. First, biodiesel is made from vegetable oils or animal fats so it is classified as a renewable, biodegradable, and nontoxic energy source (Khan *et al.*, 2013). Biodiesel, therefore, is ecologically friendly because

the production and application of biodiesel results in lower greenhouse gas (GHG) emissions than petroleum fuels do. Studies in the United States (Sheehan *et al.*, 1998) revealed that based on life cycle analysis biodiesel is able to decrease GHG emission 78% as compared to petroleum diesel fuel. Other works using various feedstock in different countries also reported that


biodiesel application results in lower GHG such as in India with *Jatropha curcas* (Kumar *et al.*, 2012; Achten *et al.*, 2010), China with various oils (Hou *et al.*, 2011; Guo *et al.*, 2010), Southeast Asia (Indonesia, Malaysia, Thailand) with palm oil (Siregar *et al.*, 2015; Harsono *et al.*, 2012; Hassan *et al.*, 2011; Silalertruksa & Gheewala, 2012), Brazilia with soybean oil (Oliveira *et al.*, 2017), and Europe with rapeseed oil (Malça & Freire, 2011). Second, unlike fossil fuels which are bestowed to a few countries, oil-plants producing biodiesel feedstock are spread throughout the world, so that geopolitically biodiesel can be one that increase energy security (Paltsev, 2016).

Utilization of vegetable oils as feedstock for biodiesel production, however, is more expensive because the cost of raw materials can reach 80 to 85% of operational costs (Canakci & Sanli, 2008; Hindryawati *et al.*, 2014). One potential cheaper raw material is used frying oil (UFO), which is not allowed to be dumped directly because it has a high COD value. In addition, UFO contains toxic compound formed during high temperature heating like hydroperoxides and aldehydes. When these compounds ingested through consumed food they may be responsible for increasing blood pressure (hypertension) and attributable to cardiovascular diseases and diabetes (Leong *et al.*, 2015; Jaarin *et al.*, 2018). Repeatedly heated cooking oils even produce carcinogenic compounds such as polycyclic aromatic hydrocarbons that relate to the incidence of tumor and cancer diseases (Ganesan *et al.*, 2017). Therefore, using UFO repeatedly to fry food or to make food-related ingredients, such as chili sauce, may endanger human health.

The potential of used cooking oil in Indonesia is quite large because the consumption of cooking oil tends to increase from 0.198 L/capita per week in 2007 to 0.205 in 2012 and 0.221 in 2017 (BPS, 2018).

This figure is very close with the study of Fujita *et al.* (2013) in Bogor, which found cooking oil consumption of one family is 3L/month or 36 L/year. With a proper management, UFO has great potential to be used as energy sources in the form of biodiesel to replace diesel oil (Chhetri *et al.*, 2008). The development of biodiesel from UFO will provide a healthier choice in the utilization of UFO.

The reaction usually chosen to produce biodiesel from oil is transesterification with methanol and a base catalyst (Fajardo *et al.*, 2011). For every mol of triglyceride or vegetable oil, the process stoichiometrically required three mols of methanol to produce three mols biodiesel or FAME (fatty acid methyl ester) and one mol glycerol, as presented in Equation (1).

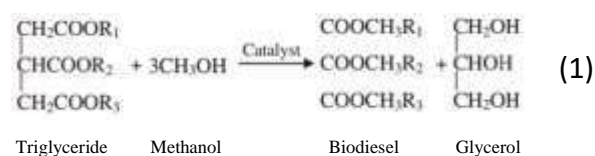

Important factors in biodiesel synthesis, among other, include molar ratio (MR) of oil to methanol, reaction temperature ( $T$ ), and reaction duration ( $t$ ). Transesterification is a reversible and equilibrium reaction so that to obtain maximum yield should be carried out with excess of methanol (Ejikeme *et al.*, 2010), rather than 1:3 as in Equation 1. The disadvantage of this reaction is that there may be a side reaction in the form of saponification which will consume the catalyst so that reducing biodiesel yield, especially if the FFA content in UFO is quite high (Narasimharao *et al.*, 2007). The relation of biodiesel yield and dependent variables is unlinear and so complex that require a robust model to accurately predict the yield. Conventional approaches such as kinetics analysis can be applied successfully in certain constrained environments, but it is not flexible in different conditions. The complexity of these relationships can be

analyzed by using ANN (artificial neural network) models so as to produce high accuracy prediction of biodiesel yield (Lavalle *et al.*, 2012; Seo, 2013).

ANN model has been an important tool to solve many problems in a wide range of areas such as pattern recognition, function approximation, categorization, prediction, optimization, associative memory, and control (Jain *et al.*, 1996). Recently, ANN model is explored to predict biodiesel yield (Thoai *et al.*, 2018). The ANN model has also been used to predict biodiesel properties such as viscosity, cloud point, flash point, pour point, and cetane number (Giwa *et al.*, 2015; Al-Shanableh *et al.*, 2016).

The general objective of this study is to predict biodiesel yield resulted from UFO transesterification reaction which is broke down into three specific objectives. First, examine the relationship between molar ratio, reaction temperature and reaction time as independent variables to biodiesel yield as the dependent variable. Second, develop ANN models to predict biodiesel yield from UFO transesterification reaction. Third, validate ANN models to obtain the most accurate models in predicting biodiesel yield.

## 2. MATERIALS AND METHODS

### 2.1. Biodiesel synthesis

The UFO was collected from fried food pedlars in the vicinity of the University of Lampung. Biodiesel was synthesized by transesterification reaction using 100 ml UFO with methanol and NaOH. Combination of three different molar ratios (*MR*) of oil to methanol (1:4; 1:5; 1:6), six temperature (*T*) levels (30, 35, 40, 45, 50, 55°C), and eight points of reaction time, *t* (0.25, 0.5, 1, 2, 3, 6, 8, 10 minutes) was run to evaluate their effect on biodiesel yield. Detil of materials and processing method have been recently reported elsewhere (Haryanto *et al.*, 2019).

### 2.2. ANN model development

Figure 1 shows a step-by-step ANN model development to validation. The ANN model to be developed is back-propagation type with supervised learning method.

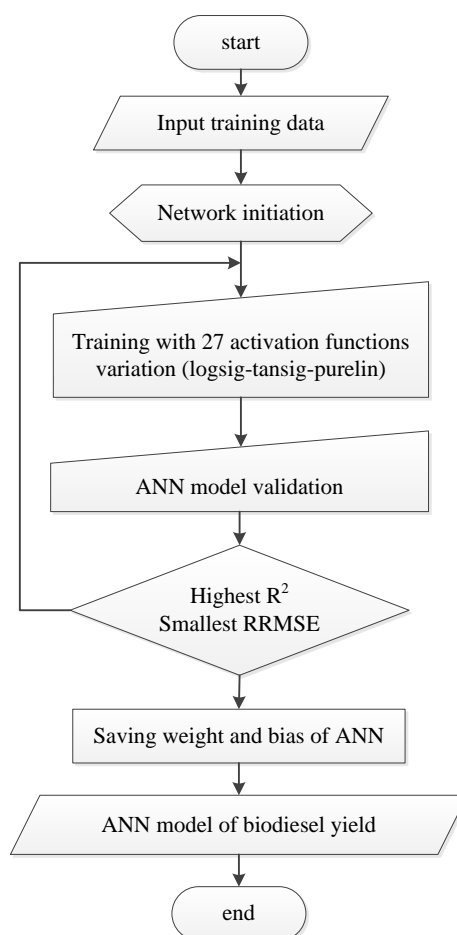


Figure 1. Flowchart fot ANN model development and validation

Figure 2 presents a form of ANN model for biodiesel yield prediction based on molar ratio, reaction temperature, and reaction time. The model consisted of three layers, namely input layer, two hidden layers, and output layer. Due to complexity of involved variables, two hidden layers are used, each with five neurons or nodes. Karsoliya (2012) guided that neuron number of hidden layer is less than twice of the number of neurons in input layer.

The ANN model works in three steps, namely feed forward, back-propagation, and

weight adjustments which are calculated based on the established equations (Widodo *et al.*, 2013). At the first step, each input node receives an input value,  $x_i$  ( $i = 1, 2, 3, \dots, n$ ) and forwards the signal to all nodes in the hidden layer. Each hidden layer node will add all the weighted input signals ( $z\_in_j$ ), which is  $x_i$  multiplied by the weight ( $v_{ij}$ ) and added by received bias,  $b_j$  ( $j = 1, 2, 3, \dots, p$ ) as in Equation 2. By using activation function as in Equation 3, the signal coming out from the hidden layer node is then calculated.

$$z\_in_j = b_j + \sum_{i=1}^n x_i v_{ij} \quad (2)$$

$$z_j = f(z\_in_j) \quad (3)$$

In this work, three activation functions (logsig, tansig, and purelin) were selected that making 27 combinations need to be validated. These three functions are defined and presented graphically in Figure 3.

Each output layer node,  $y_k$  ( $k = 1, 2, 3, \dots, m$ ), will add up all signals from the hidden layer nodes (multiplied by weight,  $w_{jk}$  and added bias,  $b_k$ ) as in Equation 4. The signal coming out of the output node is calculated by using activation function (Equation 5).

$$y\_in_k = b_k + \sum_{j=1}^p z_j w_{jk} \quad (4)$$

$$y_k = f(y\_in_k) \quad (5)$$

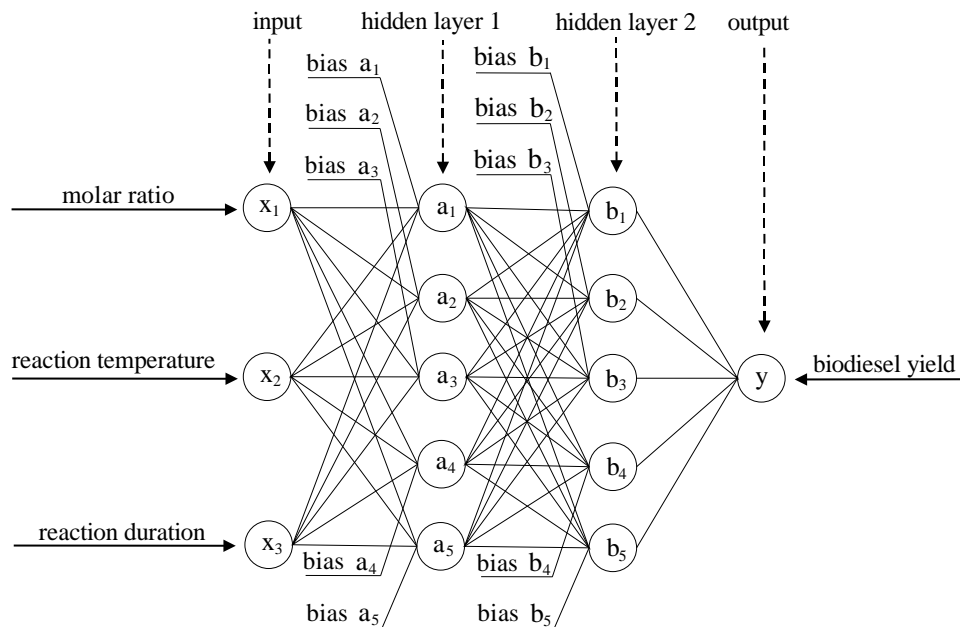


Figure 2. Form of ANN model consisting of three layers for biodiesel yield prediction

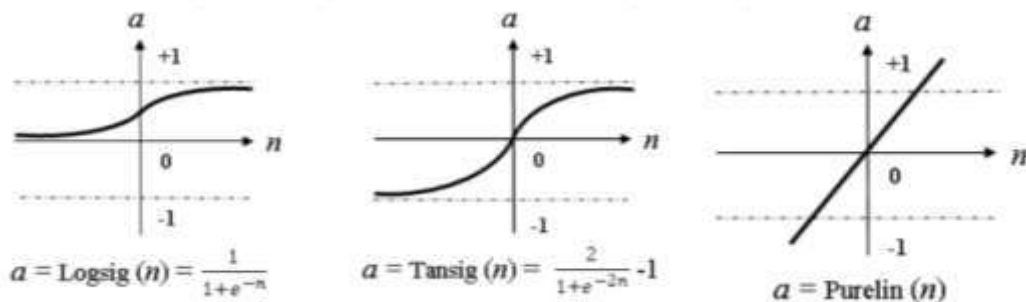


Figure 3. Definition and graphical representation of logsig, tansig, and purelin

The second step (back-propagation) starts by calculating the error information ( $\delta_k$ ) between each output node ( $y_k$ ) with target value ( $t_k$ ) associated with data for learning as in Equation 6. In order to correct the weight and bias values, correction for weight ( $\Delta w_{jk}$ ) and bias ( $\Delta b_k$ ) are calculated using the predetermined learning rate ( $\alpha$ ) as given in Equation 7 and Equation 8.

$$\delta_k = (t_k - y_k) f'(y_{in_k}) \quad (6)$$

$$\Delta w_{jk} = \alpha \delta_k z_j \quad (7)$$

$$\Delta b_k = \alpha \delta_k \quad (8)$$

The third step (weight adjustment) starts by calculating the error information ( $\delta_j$ ) between each hidden layer node ( $z_j$ ,  $j = 1, 2, 3, \dots, p$ ) with the nodes in the input layer as in Eq. 9. Then calculate the correction weight ( $\Delta v_{ij}$ ) and correction of bias ( $\Delta b_j$ ) to correct the weight value ( $v_{ij}$ ) and bias value ( $b_j$ ) as in Equation 10 and Equation 11 by using learning rate ( $\alpha$ ).

$$\delta_j = \left( \sum_{k=1}^m \delta_k w_{jk} \right) f'(z_{in_j}) \quad (9)$$

$$\Delta v_{ij} = \alpha \delta_j x_j \quad (10)$$

$$\Delta b_j = \alpha \delta_j \quad (11)$$

Each output unit is fixed by new value of its weight and bias as in Equation 12 and 13, and imilarly, for each hidden unit as in Equation 14 and 15 (Widodo *et al.*, 2013).

$$w_{jk} \text{ (new)} = w_{jk} \text{ (old)} + \Delta w_{jk} \quad (12)$$

$$b_k \text{ (new)} = b_k \text{ (old)} + \Delta b_k \quad (13)$$

$$v_{ij} \text{ (new)} = v_{ij} \text{ (old)} + \Delta v_{ij} \quad (14)$$

$$b_j \text{ (new)} = b_j \text{ (old)} + \Delta b_j \quad (15)$$

The ANN model construction was build using toolbox of MATLAB.

### 2.3. Model training

The ANN training process is preceded by network initialization to determine initial

network architecture so that the network training process can be carried out. **Twenty seven variations in activation function are combination of logsig, tansig, and purelin (Dorofki *et al.*, 2012).** Input data involved molar ratio, reaction time, and reaction temperature; whereas biodiesel yield was target parameter. Out of 144 data set (Table 1), 126 data pairs (87.5%) were used for the training by using Levenberg-Marquardt training type (Anandhi *et al.*, 2012) with learning rate ( $\alpha$ ) of 0.001 (Amini, 2008). The maximum number of iterations was set at 1000 and the smallest mean square error (MSE) is 0.00001 (Kusuma & Abadi, 2011).

### 2.4. Model validation

Model validation was performed to assess the accuracy between predicted and observed values. **All data values (Table 1) collected at reaction time of eight minutes (12.5%) were used for validation session.** In this case, validation was evaluated by using relative root mean square error (*RRMSE*) and coefficient of determination ( $R^2$ ) with a target to obtain the smallest *RRMSE* and the highest  $R^2$  values.

$$RRMSE = \frac{\sqrt{\frac{1}{n} \sum_{i=1}^n (O_i - P_i)^2}}{\bar{O}} \times 100 \quad (16)$$

$$R^2 = 1 - \frac{\sum_{i=1}^n (O_i - P_i)^2}{\sum_{i=1}^n (O_i - \bar{O})^2} \quad (17)$$

where  $n$  is number of data,  $O_i$  is observed value of  $i^{\text{th}}$ ,  $P_i$  is predicted value of  $i^{\text{th}}$ , and  $\bar{O}$  is average observed value. The predicted yield is classified as excellent with *RRMSE* < 10%, good (10-20%), fair (20-30%), and poor (> 30%) (Li *et al.*, 2013).

The  $R^2$  is used to assess the closeness of calculated values to the measurement data. The predictions are considered excellent if  $R^2$  close to one (Despotovic *et al.*, 2016).



**Tabel 1.** Biodiesel yield at different *MR*, *T*, and *t* used as training set data

Time (min)	Biodiesel yield (%)					
	30°C	35°C	40°C	45°C	50°C	55°C
<b>MR 1:4</b>						
0.25	24.27	25.49	29.38	35.67	24.63	29.26
0.5	29.10	31.16	35.06	37.28	29.30	37.07
1	34.83	37.01	42.23	40.93	36.15	41.64
2	38.72	40.98	48.14	47.02	38.84	55.98
3	41.69	46.46	51.37	53.08	45.63	61.12
6	47.69	52.96	56.43	61.47	54.57	65.93
8	50.52	56.97	61.32	63.33	65.37	69.15
10	53.43	58.44	65.22	67.23	69.27	73.04
<b>MR 1:5</b>						
0.25	30.14	25.60	32.68	30.70	27.49	29.57
0.5	32.95	37.99	37.97	32.21	34.14	31.92
1	36.90	41.81	41.85	34.98	43.97	43.88
2	41.69	44.89	44.83	45.01	50.79	47.23
3	43.64	51.49	49.71	50.92	54.55	54.61
6	53.46	55.67	58.00	56.41	63.41	63.53
8	57.39	59.56	59.56	66.15	68.44	70.93
10	61.29	63.46	67.27	68.09	70.40	73.84
<b>MR 1:6</b>						
0.25	38.88	35.44	33.64	24.62	30.08	22.57
0.5	41.82	42.72	40.63	34.01	42.80	29.02
1	43.69	48.50	44.54	41.50	49.69	33.07
2	47.86	51.49	48.52	49.47	51.87	38.64
3	52.59	56.24	54.43	56.91	58.34	54.69
6	58.46	64.02	62.90	61.11	62.62	67.56
8	63.27	65.73	65.68	67.97	71.59	75.50
10	66.19	67.67	67.61	69.92	75.46	78.44

### 3. RESULTS AND DISCUSSION

#### 3.1. ANN model for yield prediction

Table 2 shows a summary of the results from training and validation of 27 models of architectural combination of logsig-tansig-purelin activation functions. Model accuracy was evaluated from the *RRMSE* and *R<sup>2</sup>* values of the models. We observed that during training session 24 out of 27 combination models demonstrate excellent accuracy with *RRMSE* values less than 10% (between 3.32 and 6.90%) and *R<sup>2</sup>* more than 0.90 (between 0.9364 and 0.9860). The remaining three models (purelin-purelin-purelin, purelin-purelin-tansig, and purelin-purelin-logsig)

can still be grouped as good models with *RRMSE* values between 11 and 12.5% and *R<sup>2</sup>* values between 0.7589 and 0.8307. During the training session, the best architecture is tansig-tansig-purelin with *RRMSE* value of 3.32% and *R<sup>2</sup>* of 0.9860. However, this model failed as the best model during validation session. The *RRMSE* value of this model rised to 4.53% and its *R<sup>2</sup>* decreased significantly to 0.8382.

During the validation session, 25 out of the 27 models met the excelent criteria with *RRMSE* values of less than 10%. Two models fallen into fair group with *RRMSE* values of 23.71% and 27.95%. Even the three lowest

models previously mentioned which have *RRMSE* values greater than 10% in the training session, exhibited excellent *RRMSE* (< 10%) during validation. However, if the models are examined from its determination coefficients, some of the best models have very low  $R^2$  values, and five models have even negative  $R^2$ . This means that the accuracy of the results during the training session does not always reflect that the validation results will also be accurate. The mentioned three lowest models in the training session even displayed the worst performance with a negative  $R^2$  values during validation session. Nine architectural models defended themselves as excellent models with  $R^2$  values greater than 0.90 and

*RRMSE* values less than 10%. During validation session, however, the *RRMSE* of these models are lower as compared to those values during training session.


Based on the discussion above, the selection of the best activation function network architecture that in turn will be used as a prediction model must be based on both the smallest *RRMSE* value and the highest  $R^2$  value in the validation session. A low *RRMSE* value indicates a small deviation from all data so that the prediction model successfully achieves a high level of accuracy. On the other side, high  $R^2$  value indicates a very close relationship between calculated and observed biodiesel yields.

**Table 2.** Result from training and validation of ANN models


Activation function	Training		Validation	
	<i>RRMSE</i> (%)	$R^2$	<i>RRMSE</i> (%)	$R^2$
logsig-logsig-logsig	4.22	0.9772	5.15	0.8049
logsig-logsig-tansig	3.79	0.9817	3.83	0.7978
logsig-tansig-logsig	5.20	0.9648	6.34	-0.8360
logsig-tansig-tansig	3.87	0.9809	4.86	0.7865
tansig-logsig-logsig	3.99	0.9793	27.95	-0.2730
tansig-tansig-logsig	3.66	0.9829	4.04	0.8332
tansig-tansig-tansig	3.49	0.9843	2.77	0.9110
tansig-logsig-tansig	5.14	0.9658	4.98	0.3850
logsig-tansig-purelin	5.25	0.9642	6.14	0.8638
logsig-logsig-purelin	4.24	0.9770	3.02	0.9099
tansig-logsig-purelin	5.12	0.9661	23.71	0.0903
tansig-tansig-purelin	3.32	0.9860	4.53	0.8382
<b>logsig-purelin-logsig</b>	<b>5.14</b>	<b>0.9656</b>	<b>2.41</b>	<b>0.9355</b>
logsig-purelin-tansig	6.16	0.9499	3.20	0.9290
tansig-purelin-logsig	5.51	0.9597	4.11	0.8855
tansig-purelin-tansig	6.42	0.9444	3.30	0.8993
purelin-logsig-logsig	6.15	0.9502	2.73	0.9342
<b>purelin-logsig-tansig</b>	<b>6.28</b>	<b>0.9479</b>	<b>2.44</b>	<b>0.9391</b>
purelin-tansig-logsig	6.90	0.9364	3.51	0.9074
purelin-tansig-tansig	6.12	0.9512	3.29	0.8535
purelin-purelin-purelin	12.51	0.7589	5.98	-1.2950
purelin-purelin-tansig	10.99	0.8307	8.50	-34.7200
purelin-purelin-logsig	11.51	0.8104	8.14	-15.0800
purelin-tansig-purelin	6.40	0.9460	5.89	0.7532
purelin-logsig-purelin	6.47	0.9448	2.68	0.9042
logsig-purelin-purelin	6.89	0.9369	2.91	0.9002
tansig-purelin-purelin	6.71	0.9403	7.10	0.4931

Among the excellent models appeared during validation session, ANN models with activation function architecture of logsig-purelin-logsig and purelin-logsig-tansig be the best two with *RRMSE* of 2.41% and 2.44%, respectively, and  $R^2$  of 0.9355 and 0.9391, respectively. During the training

session these models (logsig-purelin-logsig and purelin-logsig-tansig) are also among the excellent models with *RRMSE* less than 10% and  $R^2$  greater than 0.90. Figure 4 and 5 show the scatter between predicted and observed values of biodiesel yield, both in training session and validation session.

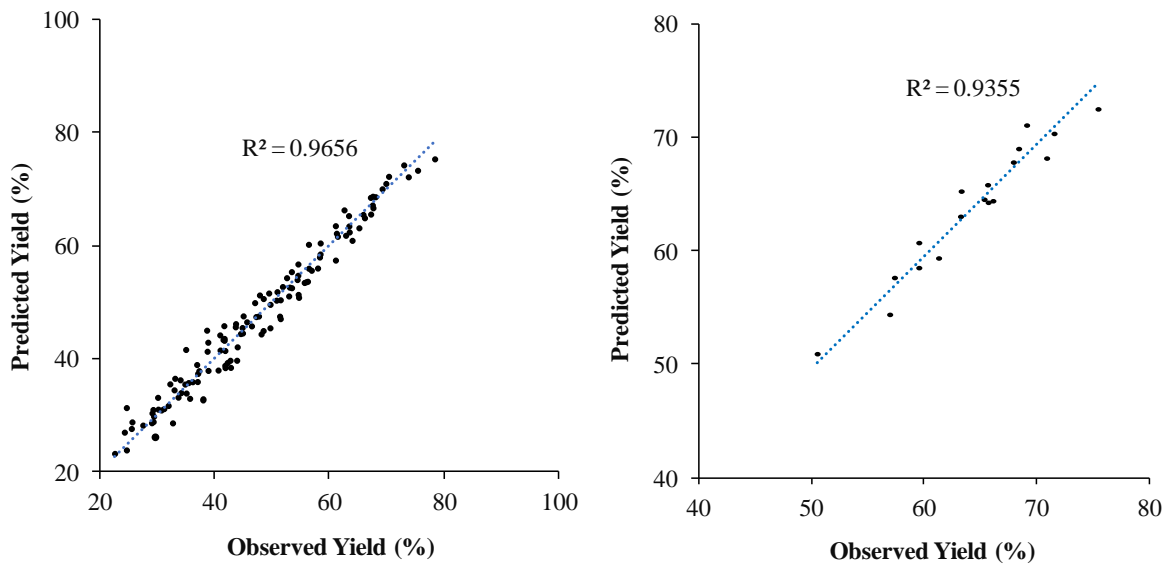

**Figure 4.** Scatter diagram of observation vs. prediction yield from ANN model with architecture of logsig-purelin-logsig: training result (left) and validation result (right)

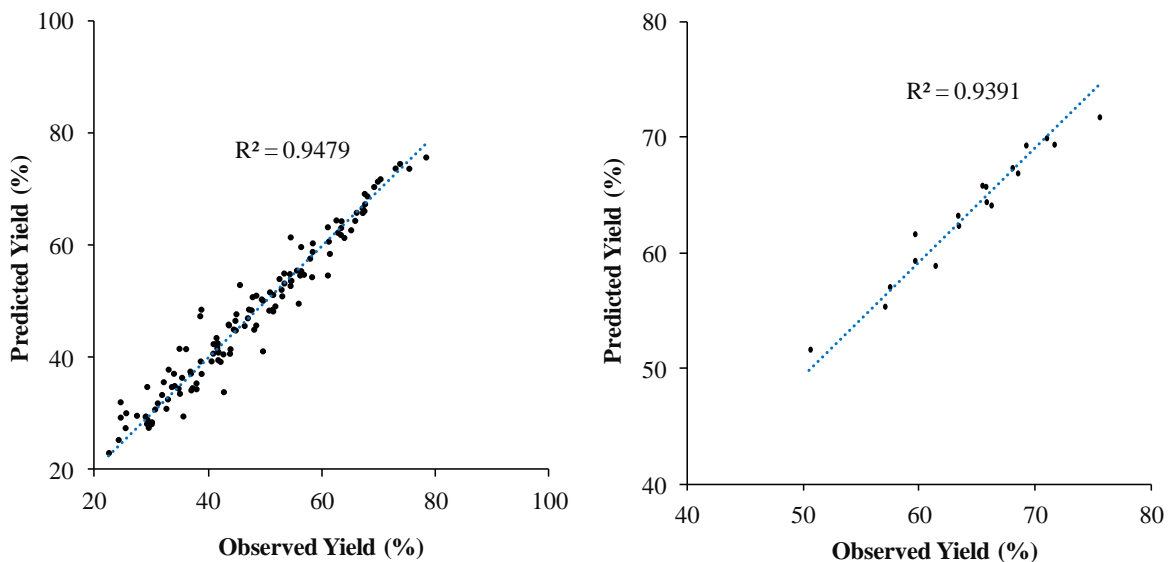

**Figure 5.** Scatter diagram of observation vs. prediction yield from ANN model with architecture of purelin-logsig-tansig: training result (left) and validation result (right)

Previously we have reported the prediction of biodiesel yield at the same conditions using first order kinetic approach and the result showed excellent predictions with *RRMSE* of 3.39%, but  $R^2$  value of 0.8454 (Haryanto *et al.*, 2019). Compared to the results from this study, it is clear that application of ANN model provide better prediction than those of first order kinetic. Other works also reported the superiority of the ANN model for biodiesel prediction

compared to other common tools such as linear regression and partial least squares regression (Ozgun & Tosun, 2017; Balabin *et al.*, 2011). For a comparison, Table 3 summarized other studies on the application of ANN in predicting biodiesel content and biodiesel properties. It can be surmised that our result is comparable with other works and further emphasize that ANN model is a powerful tool to predict biodiesel yield from different reaction conditions.

**Table 3.** Comparison of ANN application for biodiesel-related research

Feedstock	Input variables	Output target	ANN model architecture*	Model performance**	Reference
WFO	$MR, T, t$	Biodiesel yield	(3:5:5:1)	$R^2 = 0.94$ ; RRMSA = 2.41%	This works
Oil (unspecific)	$MR, T, t, P$	Biodiesel yield with Super-critical Methanol	(4:17:1)	$R^2 = 0.9980$ ; MSE = $4.49 \times 10^{-4}$	Farobie <i>et al.</i> , 2015
Refined palm oil	$MR, T, t$ , catalyst	FAME content	(4:3:3:1)	$R^2 = 0.9958$ ; RMSE = 0.0313	Thoi <i>et al.</i> , 2018
Cotton oil	$T$ , blend ratio	Viscosity	(2:3:1)	MAPE = 0.19%	Ozgun & Tosun, 2017
Cotton oil	$T$ , blend ratio	Density	(2:4:1)	MAPE = 0.02%	Ozgun & Tosun, 2017
Refined canola oil	Fatty acid composition	Cloud point	(9:6:3)	$R^2 = 0.98$ ; SE = 1.7	Al-Shanableh <i>et al.</i> , 2016
Refined canola oil	Fatty acid composition	Pour point	(9:6:3)	$R^2 = 0.94$ ; SE = 2.1	Al-Shanableh <i>et al.</i> , 2016
Different oils	Chemical composition	Cetane number	(5:2:4)	$R^2 = 0.9349$ ; MAE = 0.955	Giwa <i>et al.</i> , 2015
Some oil types	Fatty acid composition	Flash point	(5:2:4)	$R^2 = 0.981$ ; MAE = $1.705^\circ\text{C}$	Giwa <i>et al.</i> , 2015

\*) First figure is the neuron number of input layer, last figure is the number of output, and figure(s) in the middle is the neuron number of hidden layer (one or more hidden layers).

\*\*) MAE = Mean Absolute Error; MAPE = Mean Absolute Percentage Error; RMSE = Root Mean Squared Error; SE = standard Error.

#### 4. CONCLUSION

The network architecture of the ANN model consists of three layers with three nodes in the input layer, five nodes in the first and the second hidden layers, and one node in the output layer. The type of training used is the Levenberg-Marquardt with a learning rate of 0.001. Twenty seven

(27) architectural combinations of three activation function (logsig, tansig, purelin) have been trained using 126 data set (87.5%) of biodiesel yield observed at three different molar ratios, six different temperatures and seven points reaction time, and have been validated using 18 data set (12.5%) observed at reaction time of eight minutes. Results confirm that models

with activation function of logsig-purelin-logsig and purelin-logsig-tansig be the best with *RRMSE* of 2.41% and 2.44%, respectively, and  $R^2$  of 0.9355 and 0.9391%, respectively.

## 5. ACKNOWLEDGEMENTS

The research was financially supported by the DGHE (Directorate General of Higher Education), the Ministry of Research, Technology and Higher Education, through re-

search scheme of FUNDAMENTAL with contract: 071/SP2H/LT/DRPM/IV/2017585 (June 2, 2017). The views expressed in this paper, however, are solely of the authors.

## 6. AUTHORS' NOTE

The authors declare that there is no conflict of interest regarding the publication of this article. Authors confirmed that the data and the paper are free of plagiarism.

## 7. REFERENCES

- Achten, W. M. J., Almeida, J., Fobelets, V., Bolle, E., Singh, V. P., Tewari, D. N., Verchot, L. V., Muys, B. (2010). Life cycle assessment of Jatropha biodiesel as transportation fuel in rural India. *Applied Energy*, **87**, 3652–3660. DOI: 10.1016/j.apenergy.2010.07.003.
- Al-Shanableh, F. Evcil, A., & Savaş M. A. (2016). Prediction of Cold Flow Properties of Biodiesel Fuel Using Artificial Neural Network. *Procedia Computer Science*, **102**, 273–280. DOI: 10.1016/j.procs.2016.09.401.
- Amini, J. (2008). Optimum learning rate in back-propagation neural network for classification of satellite images (IRS-1D). *Scientia Iranica*, **15**, 558–567.
- Anandhi, V., R. Manicka Chezian, R. M., & Parthiban, K. T. (2012). Forecast of demand and supply of pulpwood using Artificial Neural Network. *International Journal of Computer Science and Telecommunications*, **3**, 35–38.
- Balabin, R. M., Lomakina, E. I., & Safieva, R. Z. (2011). Neural network (ANN) approach to biodiesel analysis: Analysis of biodiesel density, kinematic viscosity, methanol and water contents using near infrared (NIR) spectroscopy. *Fuel*, **90(5)**, 2007–2015.
- BPS (Statistics Indonesia). (2018). Rata-rata konsumsi per kapita seminggu beberapa macam bahan makanan penting, 2007-2017. <https://www.bps.go.id> (January 6, 2019).
- Canakci, M. & Sanli, H. (2008). Biodiesel production from various feedstocks and their effects on the fuel properties. *Journal of Industrial Microbiology & Biotechnology*, **35(5)**, 431–441. DOI: 10.1007/s10295-008-0337-6.
- Chhetri, A. B., Watts, K. C., & Islam, M. R. (2008). Waste cooking oil as an alternate feedstock for biodiesel production. *Energies*, **1**, 3–18.
- Dorofki, M., Elshafie, A. H., Jaafar, O., Karim, O. A., & Mastura, S. (2012). Comparison of Artificial Neural Network transfer functions abilities to simulate extreme runoff data. *IPCBE*, **33**, 39–44.
- Despotovic, M., Nedic, V., Despotovic, D. & Cvetanovic, S. (2016). Evaluation of empirical models for predicting monthly mean horizontal diffuse solar radiation. *Renewable and Sustainable Energy Reviews*, **56**, 246–260.

- Ejikeme, P. M., Anyaogu, I. D., Ejikeme, C. L., Nwafor, N. P., Egbuonu, C. A. C., Ukogu, K., & Ibemesi, J. A. (2010). Catalysis in biodiesel production by transesterification processes – An insight. *E-Journal of Chemistry* **7(4)** : 1120–1132.
- Fajardo, C. A. G., Guerrero-Romero, A., & Sierra, F. E. (2011). Biodiesel production from waste cooking oil. In *Biodiesel - Feedstocks and Processing Technologies* (Ed. Stoytcheva, M). Intech, Rijeka, 23–44.
- Farobie, O., Hasanah, N., & Matsumura, Y. (2015). Artificial Neural Network modeling to predict biodiesel production in supercritical methanol and ethanol using spiral reactor. *Procedia Environmental Sciences*, **28**, 214–223.
- Fujita, H., Nakano, K., Okuhara, K., Koide, N., Supriatna, D., & Prakoso, J. H. (2013). GHG Emission reduction by waste cooking oil recycling in environmental partnership program of Bogor city. *LCA AgriFood Asia Workshop*. Jakarta, 24 June 2013.
- Giwa, S. O., Adekomaya, S. O., Adama, K. O., & Mukaila, M. O. (2015). Prediction of selected biodiesel fuel properties using artificial neural network. *Frontiers in Energy*, **9(4)**, 433–445.
- Ganesan, K., Sukalingam, K., & Xu, B. (2017). Impact of consumption of repeatedly heated cooking oils on the incidence of various cancers – A critical review. *Critical Reviews in Food Science and Nutrition*, **19**, 1–18. DOI: 10.1080/10408398.2017.1379470
- Guo, R., & Hanaki, K. (2010). Potential and life cycle assessment of biodiesel production in China. *Journal of Renewable and Sustainable Energy*, **2(3)**, 033107. DOI: 10.1063/1.3449298
- Harsono, S. S., Prochnow, A., Grundmann, P., Hansen, A., & Hallmann, C. (2012). Energy balances and greenhouse gas emissions of palm oil biodiesel in Indonesia. *GCB Bioenergy*, **4**, 213–228. DOI: 10.1111/j.1757-1707.2011.01118.x
- Haryanto, A., Gita, A. C., Saputra, T. W., & Telaumbanua, M. (2019). Kinetics of biodiesel synthesis from used frying oil through base transesterification reaction. *International Journal of Renewable Energy Development* (submitted).
- Hassan, M. N. A., Jaramillo, P., & Griffin, W. M. (2011). Life cycle GHG emissions from Malaysian oil palm bioenergy development: The impact on transportation sector's energy security. *Energy Policy*, **39**, 2615–2625. DOI: 10.1016/j.enpol.2011.02.030.
- Hindryawati, N., Maniam, G. P., Karim, M. R., and Chong, K. F. (2014). Transesterification of used cooking oil over alkali metal (Li, Na, K) supported rice husk silica as potential solid base catalyst. *Engineering Science and Technology, an International Journal*, **17**, 95–103.
- Hou, J., Zhang, P. Yuan, X., & Zheng, Y. (2011). Life cycle assessment of biodiesel from soybean, jatropha and microalgae in China conditions. *Renewable and Sustainable Energy Reviews*, **15**, 5081–5091. DOI: 10.1016/j.rser.2011.07.048.
- Jaarin, K., Masbah, N., & Kamisah, Y. (2018). Heated oil and its effect on health. In *Food Quality: Balancing Health and Disease* (Eds. Holban, A.M. & Mihai, A.), Elsevier Inc., 315–337. DOI: 10.1016/B978-0-12-811442-1.00010-9.

- Jain, A. K., Mao, J., & Mohiudin, K. M. (1996). Artificial neural network : A tutorial. *Computer, March*, 31–44.
- Karsoliya, S. (2012). Approximating number of hidden layer neurons in multiple hidden layer BPNN architecture. *International Journal of Engineering Trends and Technology*, **3**, 714–717. DOI:
- Khan, M. M., Khan, R. U., Khan, F. Z. & Athar, M. (2013). Impacts of biodiesel on the environment. *International Journal of Environmental Engineering and Management*, **4(4)**, 345–350.
- Kumar, S., Singh, J., Nanoti, S. M., & Garg, M. O. (2012). A comprehensive life cycle assessment (LCA) of Jatropha biodiesel production in India. *Bioresource Technology*, **110**, 723–729. DOI: 10.1016/j.biortech.2012.01.142.
- Kusuma, I. W. & Abadi, A. M. (2011). Aplikasi model backpropagation neural network untuk perkiraan produksi tebu pada PT. Perkebunan Nusantara IX. *Seminar Nasional Matematika dan Pendidikan Matematika*. 3 Desember 2011. Yogyakarta.
- Lavalle, A., Curia, L., Lavalle, L., Giaveno, A. and Donati, E. (2012). Artificial Neural Network to predict the growth of leptospirillum ferrooxidans in 9K defined medium. *International Journal of Engineering Research and Applications*, **2**, 1406–1416.
- Li, M-F., Tang, X-P., Wu, W. & Liu, H-B. (2013). General models for estimating daily global solar radiation for different solar radiation zones in mainland China. *Energy Conversion and Management*, **70**, 139–148.
- Leong, X. F., Ng, C. Y., Jaarin, K., & Mustafa, M. R. (2015). Effects of repeated heating of cooking oils on antioxidant content and endothelial function. *Austin Journal of Pharmacology and Therapeutics*, **3(2)**, 1–7.
- Malça, J. & Freire, F. (2011). Life-cycle studies of biodiesel in Europe: A review addressing the variability of results and modeling issues. *Renewable and Sustainable Energy Reviews*, **15**, 338–351.
- Narasimharao, K., Lee, A., & Wilson, K. (2007). Catalysts in production of biodiesel: A review. *Journal of Biobased Materials and Bioenergy*, **1(1)**, 1–12.
- Oliveira, F. C. De & Coelho, S. T. (2017). History, evolution, and environmental impact of biodiesel in Brazil: A review. *Renewable and Sustainable Energy Reviews*, **75**, 168–179. DOI: 10.1016/j.rser.2016.10.060.
- Özgür, C. & Tosun, E. (2017). Prediction of density and kinematic viscosity of biodiesel by artificial neural networks. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, **39(10)**, 985–991. DOI: 10.1080/15567036.2017.1280563
- Paltsev, S. (2016). The complicated geopolitics of renewable energy. *Bulletin of the Atomic Scientists*, **72(6)**, 390–395, DOI: 10.1080/00963402.2016.1240476.
- Seo, K. (2013). A Simulation study on an Artificial Neural Network based automatic control system of a plant factory. *International Journal of Control and Automation*, **6**, 127–136.

- Sheehan, J., Camobreco, V., Duffield, J., Graboski, M., & Shapouri, H. (1998). Life cycle inventory of biodiesel and petroleum diesel for use in an urban bus. *Final Report*. National Renewable Energy Laboratory, NREL/SR-580-24089.
- Silalertruksa, T. & Gheewala, S. H. (2012). Environmental sustainability assessment of palm biodiesel production in Thailand. *Energy*, **43**, 306-314. DOI: 10.1016/j.energy.2012.04.025.
- Siregar, K., Tambunan, A. H., Irwanto, A. K., Wirawan, S. S. & Araki, T. (2015). A comparison of life cycle assessment on oil palm (*Elaeis guineensis* Jacq.) and physic nut (*Jatropha curcas* Linn.) as feedstock for biodiesel production in Indonesia. *Energy Procedia*, **65**, 170-179.
- Thoai, D. G., Tongurai, C., Prasertsit, K., & Kumar, A. (2018). Predictive capability evaluation of RSM and ANN in modeling and optimization of biodiesel production from palm (*Elaeis guineensis*) oil. *International Journal of Applied Engineering Research*, **13(10)**, 7529-7540.
- Widodo, P. P., Handayanto, R. T., & Herlawati (2013). *Penerapan Data Mining dengan MATLAB*. Rekayasa Sains, Bandung.





AGUS HARYANTO <agus.haryanto@fp.unila.ac.id>

---

## Asking on my manuscript

1 message

---

**AGUS HARYANTO** <agus.haryanto@fp.unila.ac.id>  
To: nandiyanto@upi.edu

Fri, Aug 23, 2019 at 9:49 AM

Dear Dr. Nandiyanto

Just curious on my manuscript with ID 15334 and tittle:

**Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification.**

I have completed and uploaded the revised manuscript long time ago.

But the status is still "[In Review: Revisions Required](#)"

Is there anything else I can do?

Thank you in advance and I am looking forward to hearing from you soon.

Agus Haryanto



AGUS HARYANTO <agus.haryanto@fp.unila.ac.id>

## [IJOST] Your Submission (final)

3 messages

**Asep Bayu Dani Nandiyanto** <ejournal@upi.edu>

Mon, Sep 2, 2019 at 3:46 PM

To: Agus Haryanto <agus.haryanto@fp.unila.ac.id>, Tri Wahyu Saputra <poox.saputra@gmail.com>, Mareli Telaumbanua <marelitelaumbanua@gmail.com>, Amiera Citra Gita <citraamiera@gmail.com>

Cc: ijost@upi.edu

Dear Author(s):

It is my great pleasure to inform you that your paper has been ACCEPTED and will be published on the **INDONESIAN JOURNAL OF SCIENCE AND TECHNOLOGY (IJOST)** (ISSN: e.2527-8045 p.2528-1410, SCOPUS indexed journal).  
Congratulations!

In order to cover part of the publication cost, each accepted paper will be charged:

- Indonesian authors: 2.500.000 IDR per article

This fee includes:

- DOI registration for each paper
- Checking the article similarity by turnitin
- English proofreading

If the manuscript is accepted for publication, you will be asked to pay an Article Publication Fee to cover publications costs. This charge is for the first 10 pages, and if any published manuscript over 10 pages will incur extra charges USD50 (IDR 750.000) per page.

The payment should be made by bank transfer (T/T):

-----  
Bank Account name (please be exact)/Beneficiary: ASEP BAYU DANI NANDIYANTO

Bank Name: Bank Negara Indonesia (BNI)

Branch Office: Perguruan Tinggi Bandung

City: Bandung

Country :Indonesia

Bank Account # : 0846066753

SWIFT Code: BNINIDJAXXX

Cell. Phone: +62 813 9434 0884

Your paper will be scheduled for forthcoming issue (March 2020). Please pay the publication fee as soon as possible. If you need more time, please send a request to this email (ijost [at] [upi.edu](mailto:upi.edu)) and cc to nandiyanto [at] [upi.edu](mailto:upi.edu).

Then, please submit your payment receipt to this email.

I look forward to your response.

Sincerely yours,

Asep Bayu Dani Nandiyanto  
Editor-in-Chief,  
Indonesian Journal of Science and Technology

---

Indonesian Journal of Science and Technology

<http://ejournal.upi.edu/index.php/ijost>

---

**AGUS HARYANTO** <agus.haryanto@fp.unila.ac.id>

Mon, Sep 2, 2019 at 4:06 PM

To: Dian Herdiana <ejournal@upi.edu>

Thank you very very much for this information. We will make payment soon.

Agus Haryanto  
[Quoted text hidden]

---

**AGUS HARYANTO** <agus.haryanto@fp.unila.ac.id>  
To: Dian Herdiana <ejournal@upi.edu>

Wed, Sep 4, 2019 at 7:38 PM

Dear Editor,  
I have made payment 2.500.000 IDR for publication fee of my paper.  
Attached is ATM receipt.

Best regards,  
Agus Haryanto

Pada tanggal Sen, 2 Sep 2019 16.01, Asep Bayu Dani Nandiyanto <ejournal@upi.edu> menulis:  
[Quoted text hidden]



IMG\_20190904\_191249.jpg  
960K

EDITORS

» Editorial Office:  
Asep Bayu Nandiyanto  
Editor In Chief  
Ade Gaffar Abdullah  
Vice Editor  
Dwi Fitria Al Husaeni  
Nissa Nur Azizah  
Web & Layout Editor

IJoST QUALITY

IJoST is now at Q1 Scimago Journal  
Ranking



USER

You are logged in as...  
**agusharyid\_65**

- My Journals
- My Profile
- Log Out

SUBMISSION



AUTHOR GUIDELINES

- AUTHOR GUIDELINES
- AUTHOR(S) PUBLICATION ETHICS
- ARTICLE TEMPLATE
- HOW TO SUBMIT AN ARTICLE
- HOW TO REGISTER NEW ACCOUNT

KEYWORDS

Adsorption Biodiesel COVID-19  
Carbon Carbon Nanofibers  
Catalyst Cementitious  
Nanocomposites Concentration  
polarization Data analysis

Home > User > Author > Submissions > #15334 > **Summary**

#15334 SUMMARY

SUMMARY REVIEW EDITING  
SUBMISSION

Authors Agus Haryanto, Tri Wahyu Saputra, Mareli Telaumbanua, Amiera Citra Gita  
Title Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification  
Original file [15334-32326-1-SM.DOCX](#) 2019-02-04  
Suppl. files [15334-32327-1-SP.DOCX](#) 2019- ADD A SUPPLEMENTARY FILE  
[02-04](#)  
[15334-32328-1-SP.DOCX](#) 2019-  
[02-04](#)  
[15334-32329-1-SP.DOC](#) 2019-  
[02-04](#)  
Submitter Mr Agus Haryanto  
Date submitted February 4, 2019 - 07:01 PM  
Section Articles  
Editor Dian Herdiana

STATUS

Status In Editing  
Initiated 2019-09-02  
Last modified 2019-09-02

SUBMISSION METADATA

EDIT METADATA


Authors

Name Agus Haryanto  
ORCID iD <http://orcid.org/0000-0002-8954-4463>  
Affiliation University of Lampung  
Country Indonesia  
Competing interests  
CI POLICY  
Bio Statement Department of Agricultural Engineering  
Principal contact for editorial correspondence.  
Name Tri Wahyu Saputra  
Affiliation University of Lampung  
Country Indonesia  
Competing interests  
CI POLICY  
Bio Statement Department of Agricultural Engineering  
Name Mareli Telaumbanua  
Affiliation University of Lampung  
Country Indonesia  
Competing interests  
CI POLICY  
Bio Statement Department of Agricultural Engineering  
Name Amiera Citra Gita  
Affiliation University of Lampung  
Country Indonesia  
Competing interests  
CI POLICY  
Bio Statement Department of Agricultural Engineering

Title and Abstract

Title Application of Artificial Neural Network to Predict Bio-diesel Yield from Waste Frying Oil Transesterification  
Abstract Used frying oil (UFO) has great potential as feedstock for biodiesel production. This study aims to develop an artificial neural network (ANN) model to predict biodiesel yield produced from base-catalyzed transesterification reaction of UFO. The experiment was performed with 100 ml of UFO at three different molar ratios (oil:methanol), namely 1:4, 1:5, 1:6, reaction temperatures of 30 to 55 °C (raised by 5 °C) and reaction time of 0.25, 0.5, 1, 2, 3, 6, and 10 min. Prediction model was based on ANN back propagation type with supervised learning method. Validation model was carried out using data set measured at reaction duration of 8 min. The results showed that network architecture of the ANN model consists of four layers, namely input layer, first hidden layer, second hidden layer, and output layer. The training used in this work is the Levenberg-Marquardt train type with

OUR JOURNAL



JOURNAL CONT

Search

Search Scope  
All

Search

- Browse
- By Issue
  - By Author
  - By Title
  - Other Journa

INFORMATION

- For Readers
- For Authors
- For Librarians

INDEXS





Download Here

learning rate of 0.001 and activation function of purelin-logsig-purelin. The model validation revealed that predicted yield is excellently accurate with %RMSE value of 1.51% and the coefficient of determination ( $R^2$ ) of 0.946. Prediction values resulted from the ANN model were better than those of first-order kinetics.

#### Indexing

Academic discipline and sub-disciplines Food and Agriculture Engineering

Keywords Biodiesel; ANN model; Waste frying oil; Transesterification; Activation function; Yield en

Language en

#### Supporting Agencies

Agencies DGHE (Directorate General of Higher Education)

#### References

- References
- Achten, W.M.J., Almeida, J., Fobelets, V., Bolle, E., Singh, V.P., Tewari, D.N., Verchot, L.V., Muys, B. (2010) Life cycle assessment of Jatropha biodiesel as transportation fuel in rural India. *Applied Energy*, 87, 3652–3660. DOI: 10.1016/j.apenergy.2010.07.003.
- Amini, J. (2008). Optimum learning rate in back-propagation neural network for classification of satellite images (IRS-1D). *Scientia Iranica*, 15, 558-567.
- Anandhi, V., R. Manicka Chezian, R. M., & Parthiban, K.T. (2012). Forecast of demand and supply of pulpwood using Artificial Neural Network. *International Journal of Computer Science and Telecommunications*, 3, 35-38.
- Author (2019)
- BPS (Statistics Indonesia). (2018). Rata-rata konsumsi per kapita seminggu beberapa macam bahan makanan penting, 2007-2017. <https://www.bps.go.id> (January 6, 2019).
- Canakci, M. & Gerpen, J.V. (1999) Biodiesel production via acid catalysis. *Transactions of the ASAE*, 42(5), 1203-1210. DOI: 10.13031/2013.13285.
- Chhetri, A. B., Watts, K. C., & Islam, M.R. (2008). Waste cooking oil as an alternate feedstock for biodiesel production. *Energies*, 1, 3-18.
- Dorofki, M., Elshafie, A. H., Jaafar, O., karim, O. A., & Mastura, S. (2012). Comparison of Artificial Neural Network transfer functions abilities to simulate extreme runoff data. *IPCBE*, 33, 39-44.
- Despotovic, M., Nedic, V., Despotovic, D. & Cvetanovic, S. (2016) Evaluation of empirical models for predicting monthly mean horizontal diffuse solar radiation. *Renewable and Sustainable Energy Reviews*, 56, 246-260.
- Ejikeme, P.M., Anyaogu, I.D., Ejikeme, C.L., Nwafor, N.P., Egbuonu, C.A.C., Ukogu, K., & Ibemesi, J.A. (2010). Catalysis in biodiesel production by transesterification processes – An insight. *E-Journal of Chemistry* 7(4) : 1120-1132.
- Fajardo, C.A.G., Guerrero-Romero, A., & Sierra, F.E. (2011). Biodiesel production from waste cooking oil. In *Biodiesel - Feedstocks and Processing Technologies* (Ed. Stoytcheva, M). Intech, Rijeka, 23-44.
- Fujita, H., Nakano, K., Okuhara, K., Koide, N., Supriatna, D., & Prakoso, J.H. 2013. GHG Emission reduction by waste cooking oil recycling in environmental partnership program of Bogor city. *LCA AgriFood Asia Workshop*. Jakarta, 24 June 2013.
- Ganesan, K., Sukalingam, K., & Xu, B. (2017) Impact of consumption of repeatedly heated cooking oils on the incidence of various cancers – A critical review. *Critical Reviews in Food Science and Nutrition*, DOI: 10.1080/10408398.2017.1379470
- Guo, R., & Hanaki, K. (2010). Potential and life cycle assessment of biodiesel production in China. *Journal of Renewable and Sustainable Energy*, 2(3), 033107. DOI: 10.1063/1.3449298
- Harsono, S.S., Prochnow, A., Grundmann, P., Hansen, A., & Hallmann, C. (2012). Energy balances and greenhouse gas emissions of palm oil biodiesel in Indonesia. *GCB Bioenergy*, 4, 213–228. DOI: 10.1111/j.1757-1707.2011.01118.x
- Hassan, M.N.A., Jaramillo, P., & Griffin, W.M. (2011) Life cycle GHG emissions from Malaysian oil palm bioenergy development: The impact on transportation sector's energy security. *Energy Policy*, 39, 2615–2625. DOI: 10.1016/j.enpol.2011.02.030.
- Hindryawati, N., G.P. Maniam, M.R. Karim and K.F. Chong. 2014. Transesterification of used cooking oil over alkali metal (Li, Na, K) supported rice husk silica as potential solid base catalyst. *Engineering Science and Technology, an International Journal*, 17: 95-103.
- Hou, J., Zhang, P. Yuan, X., & Zheng, Y. (2011) Life cycle assessment of biodiesel from soybean, jatropha and microalgae in China conditions. *Renewable and Sustainable Energy Reviews*, 15, 5081–5091. DOI: 10.1016/j.rser.2011.07.048.
- Jaarin, K., Masbah, N., & Kamisah, Y. (2018) Heated oil and its effect on health. In *Food Quality: Balancing Health and Disease* (Eds. Holban, A.M. & Mihai, A.), Elsevier Inc., 315-337. DOI: 10.1016/B978-0-12-811442-1.00010-9.
- Jahirul, M.I., Senadeera, W., Brown, R.J., & Moghaddam, L. (2014). Estimation of biodiesel properties from chemical composition – an Artificial Neural Network (ANN) approach. *International Scientific Journal of Environmental Science*, 3(3), 1-7. DOI:
- Jain, A.K., Mao, J., & Mohiudin, K.M. (1996). Artificial neural network : A tutorial. *Computer, March*, 31-44.
- Karsoliya, S. (2012). Approximating number of hidden layer neurons in multiple hidden layer BPNN architecture. *International Journal of Engineering Trends and Technology*, 3, 714-717. DOI:



#### JOURNAL VISITS

#### Visitors

ID	115,56
IN	10,40
US	8,016
MY	6,871
DZ	3,153
PH	2,798
JP	2,732
IQ	2,262
MA	1,934
NG	1,776
PK	1,765
TH	1,685
TR	1,240
EG	1,193
IR	1,099
BD	1,021
GB	909
VN	897
AU	760
KR	758

Pageviews: 732

- Khan, M.M., Khan, R.U., Khan, F.Z. & Athar, M. (2013) Impacts of biodiesel on the environment. *International Journal of Environmental Engineering and Management*, 4(4), 345-350.
- Kumar, S., Singh, J., Nanoti, S.M., & Garg, M.O. (2012). A comprehensive life cycle assessment (LCA) of Jatropha biodiesel production in India. *Bioresource Technology*, 110, 723-729. DOI: 10.1016/j.biortech.2012.01.142.
- Kusuma, I. W. & Abadi, A. M. (2011). Aplikasi model backpropagation neural network untuk perkiraan produksi tebu pada PT. Perkebunan Nusantara IX. Seminar Nasional Matematika dan Pendidikan Matematika. 3 Desember 2011. Yogyakarta.
- Lavalle, A., Curia, L., Lavalle, L., Giaveno, A. and Donati, E. (2012). Artificial Neural Network to predict the growth of leptospirillum ferrooxidans in 9K defined medium. *International Journal of Engineering Research and Applications (IJERA)* 2 : 1406-1416
- Li, M-F, Tang, X-P, Wu, W. & Liu, H-B. (2013) General models for estimating daily global solar radiation for different solar radiation zones in mainland China. *Energy Conversion and Management*, 70, 139-148.
- Leong, X.F, Ng, C.Y., Jaarin, K., & Mustafa, M.R. (2015). Effects of repeated heating of cooking oils on antioxidant content and endothelial function. *Austin Journal of Pharmacology and Therapeutics* 3(2) : 1-7.
- Malça, J. & Freire, F. (2011) Life-cycle studies of biodiesel in Europe: A review addressing the variability of results and modeling issues. *Renewable and Sustainable Energy Reviews*, 15, 338-351.
- Narasimharao, K., Lee, A., & Wilson, K. (2007). Catalysts in production of biodiesel: A review. *Journal of Biobased Materials and Bioenergy* 1(1) : 1-12
- Oliveira, F. C. De & Coelho, S.T. (2017) History, evolution, and environmental impact of biodiesel in Brazil: A review. *Renewable and Sustainable Energy Reviews*, 75, 168-179. DOI: 10.1016/j.rser.2016.10.060.
- Paltsev, S. (2016) The complicated geopolitics of renewable energy. *Bulletin of the Atomic Scientists*, 72(6), 390-395, DOI: 10.1080/00963402.2016.1240476.
- Seo, K. (2013). A Simulation study on an Artificial Neural Network based automatic control system of a plant factory. *International Journal of Control and Automation*, 6, 127-136.
- Sheehan, J., Camobreco, V., Duffield, J., Graboski, M., & Shapouri, H. (1998) Life cycle inventory of biodiesel and petroleum diesel for use in an urban bus. Final report for U.S. Dept. of Energy's Office of Fuel Development and the U.S. Dept. of Agriculture's Office of Energy, by the National Renewable Energy Laboratory, NREL/SR-580-24089.
- Silalertruksa, T. & Gheewala, S.H. (2012) Environmental sustainability assessment of palm biodiesel production in Thailand. *Energy*, 43, 306-314. DOI: 10.1016/j.energy.2012.04.025.
- Siregar, K., Tambunan, A.H., Irwanto, A.K., Wirawan, S.S. & Araki, T. (2015) A comparison of life cycle assessment on oil palm (*Elaeis guineensis* Jacq.) and physic nut (*Jatropha curcas* Linn.) as feedstock for biodiesel production in Indonesia. *Energy Procedia*, 65, 170-179.
- Widodo, P.P., Handayanto, R.T., & Herlawati (2013). Penerapan Data Mining dengan MATLAB. Rekayasa Sains, Bandung.
- Yuste, A.J. & Dorado, M.P. (2006) A neural network approach to simulate biodiesel production from waste olive oil. *Energy Fuels*, 20(1), 399-402. DOI: 10.1021/ef050226t.

Indonesian Journal of Science and Technology is published by UPI.

 00704189  
[View My Stats](#)