

KORESPONDENSI INDONESIA JOURNAL OF APPLIED PHYSICS (IJAP)

1. SUBMIT ATAU PENGIRIMAN ARTIKEL PERTAMA

- [LOGIN](#)
- [Editorial Team](#)
- [Reviewer Acknowledgment](#)
- [Focus and Scope](#)
- [Author Guidelines](#)
- [Guidelines for Reviewer](#)
- [Publishing Ethical Statement](#)
- [Online Submission](#)
- [Indexing](#)
- [Author\(s\) Fee](#)
- [Withdrawal of Manuscripts](#)
- [Conference Collaboration](#)

Reviewers Recognition





Indonesian Journal of Applied Physics


Web of Science Partner

#58414 Summary


[Summary](#) [Review](#) [Editing](#)

Submission


Authors	Ordas Dewanto, Istifani Ferucha, Darsono Darsono, Sri Rizky
Title	Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst
Original file	58414-157682-1-SM.doc 2022-01-12
Supp. files	None
Submitter	Mr. Ordas Dewanto 
Date submitted	January 12, 2022 - 10:59 AM
Section	Articles
Editor	Minna Aurela  Sorja Koesuma 
Abstract Views	223



ISSN




9 772089 013004



9 772477 641055


Template



Journal Template


Template in English

2. ARTIKEL PERTAMA (ORIGINAL)

 58414-157682-1-SM.doc
DOC • 561 kB

23.46

3. REVISI



Indonesian Journal of Applied Physics


Web of Science Partner

Peer Review

Round 1

Review Version	58414-157687-1-RV.doc	2022-01-12
Initiated	2022-02-21	
Last modified	2022-10-04	
Uploaded file	Reviewer C 58414-168765-1-RV.doc	2022-05-25

Template



Journal Template

Template in English

4. [IJAP] EDITOR DECISION

Our decision is: Revisions Required

The screenshot shows a Gmail interface with the following details:

- Browser Tabs:** (3) WhatsApp, [IJAP] Editor Decision, Sistem Penilaian Angka, DOKUMEN BUKTI KOR..., Hasil Cari Yahoo untuk, Google Translate.
- Address Bar:** mail.google.com/mail/u/0/#inbox/FMfcgZGqQmWglrBZrTfKfRGhStxNcDnJ
- Left Sidebar:** Compose, Mail (99+), Chat, Spaces, Meet. Categories: Social (323), Updates (181), Forums (77), Promotions (244).
- Search Bar:** Search in mail
- Active Tab:** [IJAP] Editor Decision (External, Inbox)
- Sender:** Fahru Nurosyid <jurnal@mail.uns.ac.id> (to me)
- Date:** Oct 4, 2022, 7:42 AM
- Message Content:**

The following message is being delivered on behalf of **INDONESIAN JOURNAL OF APPLIED PHYSICS**.


Dear Dr. Ordas Dewanto:

We have reached a decision regarding your submission to **INDONESIAN JOURNAL OF APPLIED PHYSICS**, "Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst".

Our decision is: **Revisions Required**

Dr Fahru Nurosyid
Editor in Chief

Reviewer B:

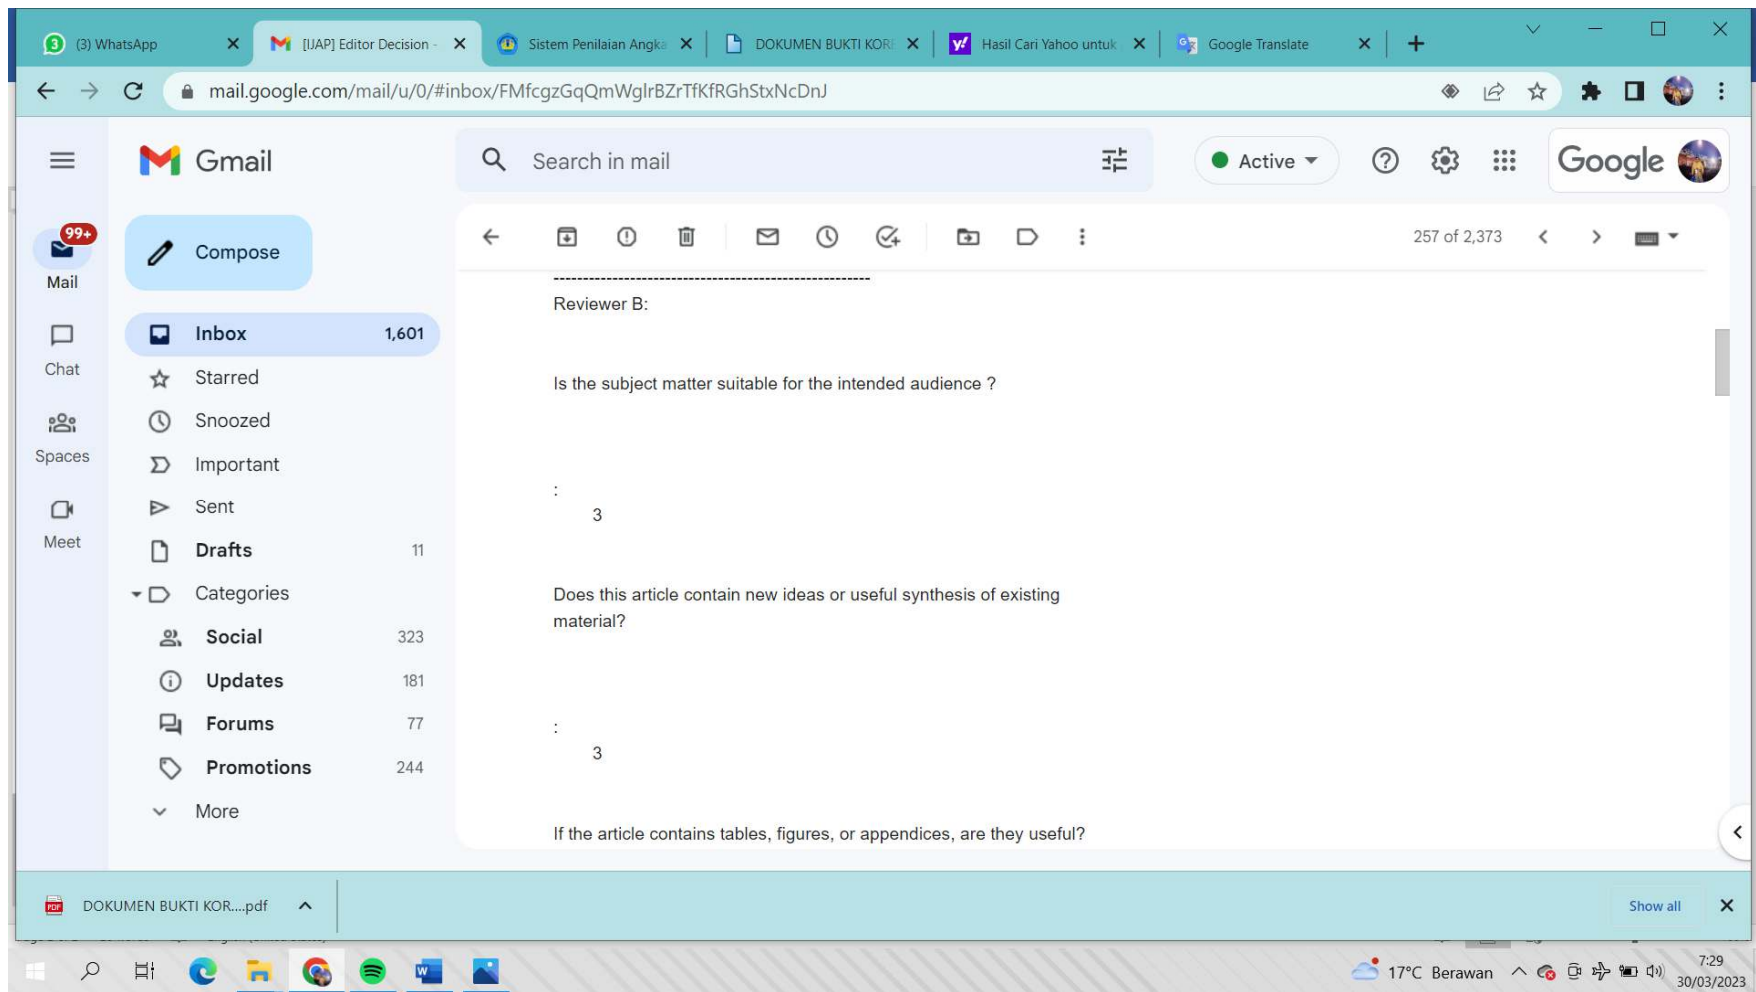

Browser tabs: (2) WhatsApp, [IJAP] Editor Decision, Sistem Penilaian Angka, DOKUMEN BUKTI KOR..., Hasil Cari Yahoo untuk, Google Translate

Address bar: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmWglrBZrTfKfRGhStxNcDnJ

Search: Search in mail

Active: Active

Google logo

Compose

Mail: 99+

Chat

Spaces

Meet

Inbox: 1,601

Starred

Snoozed

Important

Sent

Drafts: 11

Categories

Social: 323

Updates: 181

Forums: 77

Promotions: 244

More

257 of 2,373

If the article contains tables, figures, or appendices, are they useful?
Which, if any, could be deleted?

:

4

Are the references satisfactory?

:

3

Is the length of the article appropriate to the subject matter is considers?

DOKUMEN BUKTI KOR....pdf

Show all

17°C Berawan 7:40 30/03/2023

Browser tabs: (3) WhatsApp, [IJAP] Editor Decision, Sistem Penilaian Angk..., DOKUMEN BUKTI KOR..., Hasil Cari Yahoo untuk, Google Translate

Address bar: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmWglrBZrTfKfRGhStxNcDnJ

Search: Search in mail

Active: Active

Mail navigation: Compose, Mail (99+), Chat, Spaces, Meet

Mail folders and counts:

- Inbox: 1,601
- Starred
- Snoozed
- Important
- Sent
- Drafts: 11
- Categories
 - Social: 323
 - Updates: 181
 - Forums: 77
 - Promotions: 244
- More
- Labels: +

Message content:

Is the length of the article appropriate to the subject matter is considers?
:
4

Is the article clearly written?
:
3

Is the title suggestive of the article's content?
:
4

Page indicator: 257 of 2,373

System tray: 17°C Berawan, 7:41, 30/03/2023

Browser tabs: (3) WhatsApp, [IJAP] Editor Decision, Sistem Penilaian Angka, DOKUMEN BUKTI KOR, Hasil Cari Yahoo untuk, Google Translate

Address bar: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmWglrBZrTfKfRGhStxNcDnJ

Search: Search in mail

Active: Active

Mail navigation: Compose, Mail (99+), Chat, Spaces, Meet

Mail folders: Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), More, Labels (+)

Message content:

Is the article appropriately organized and are the headings indicative of content?

:

4

Reviewer's comments to the authors:

:

Dear authors, the manuscript needed some purely grammatical corrections. For the rest it is well organized and easy to follow. Maybe you could have spent some more words on the conclusion, since the importance of various energy resources nowadays. Also, given the relatively high temperatures that need to be reached for the conversion of oil-shale to oil, one could have dedicated a paragraph to the economical feasibility of this kind of processes (well, this in particular), but clearly it is not compulsory.

Reviewer C:

System tray: 17°C Berawan, 7:43, 30/03/2023

The screenshot shows a Gmail interface in a web browser. The browser's address bar displays the URL: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmWglrBZrTfKfRgHStxNcDnJ. The Gmail sidebar on the left lists various folders: Mail (99+), Compose, Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and Labels (+). The main content area shows an email from 'Reviewer C' with the following text:

Reviewer C:

Is the subject matter suitable for the intended audience ?


:
4


Does this article contain new ideas or useful synthesis of existing material?

:
4

If the article contains tables, figures, or appendices, are they useful?
Which, if any, could be deleted?

The bottom of the screen shows the Windows taskbar with the system tray displaying a temperature of 17°C Berawan, the time 7:43, and the date 30/03/2023.

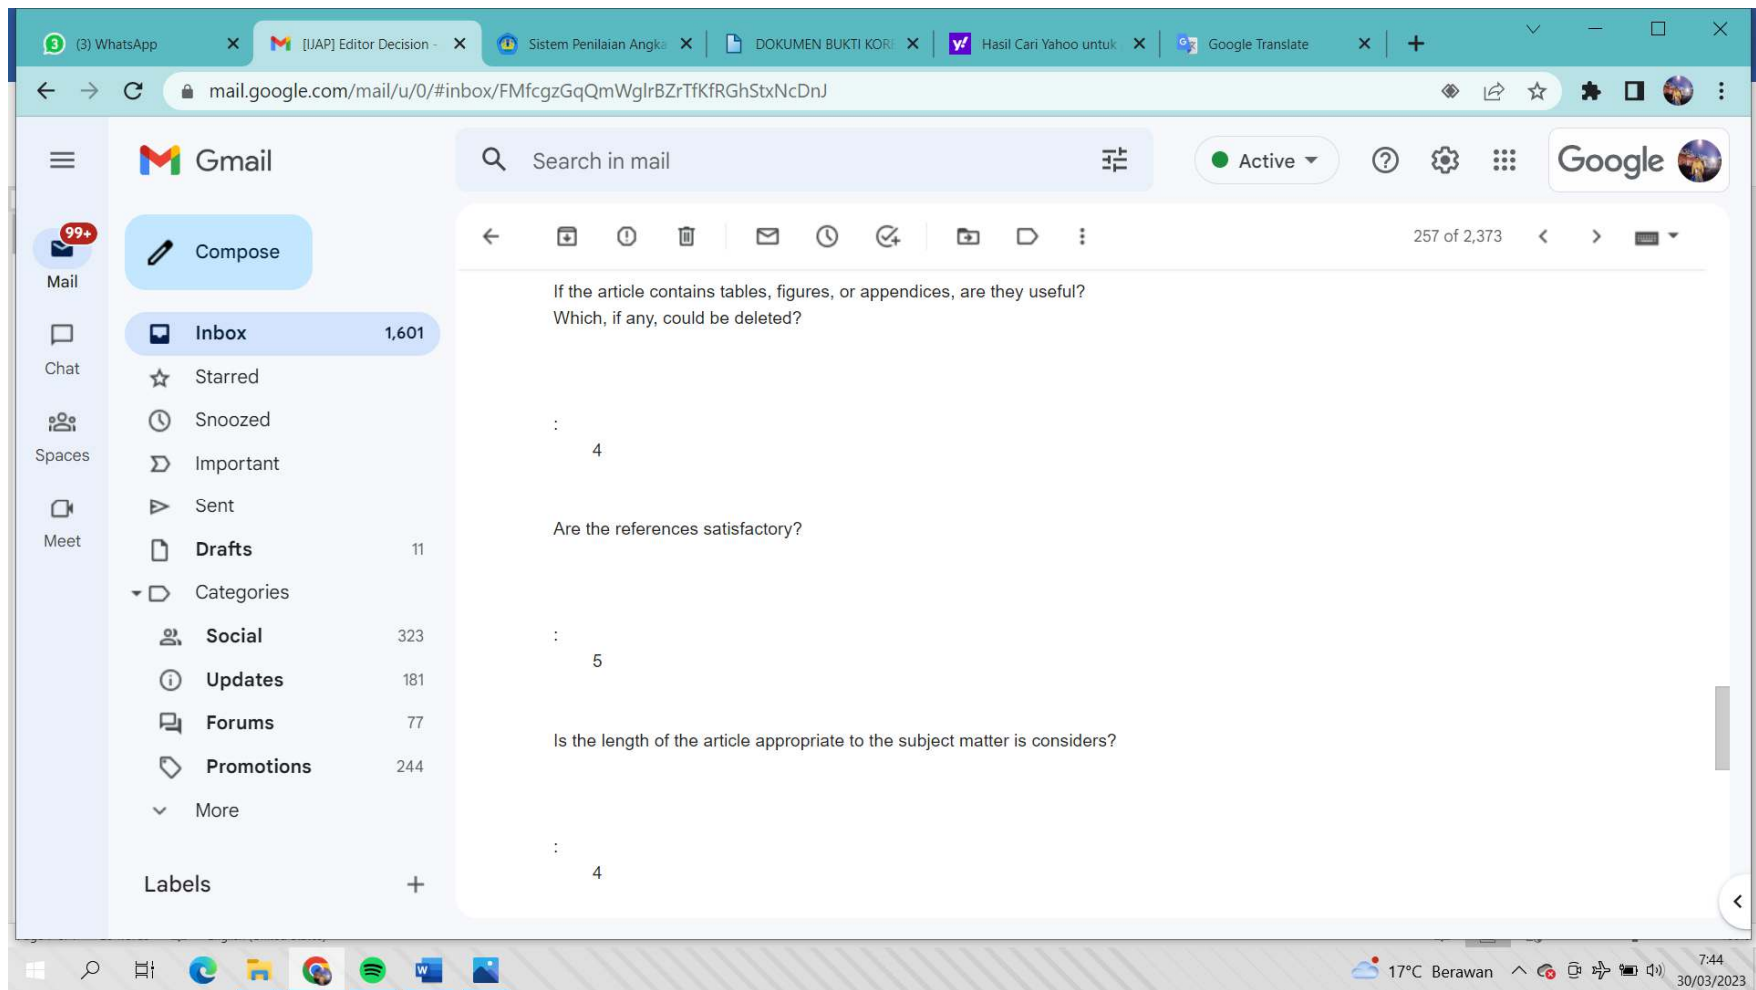

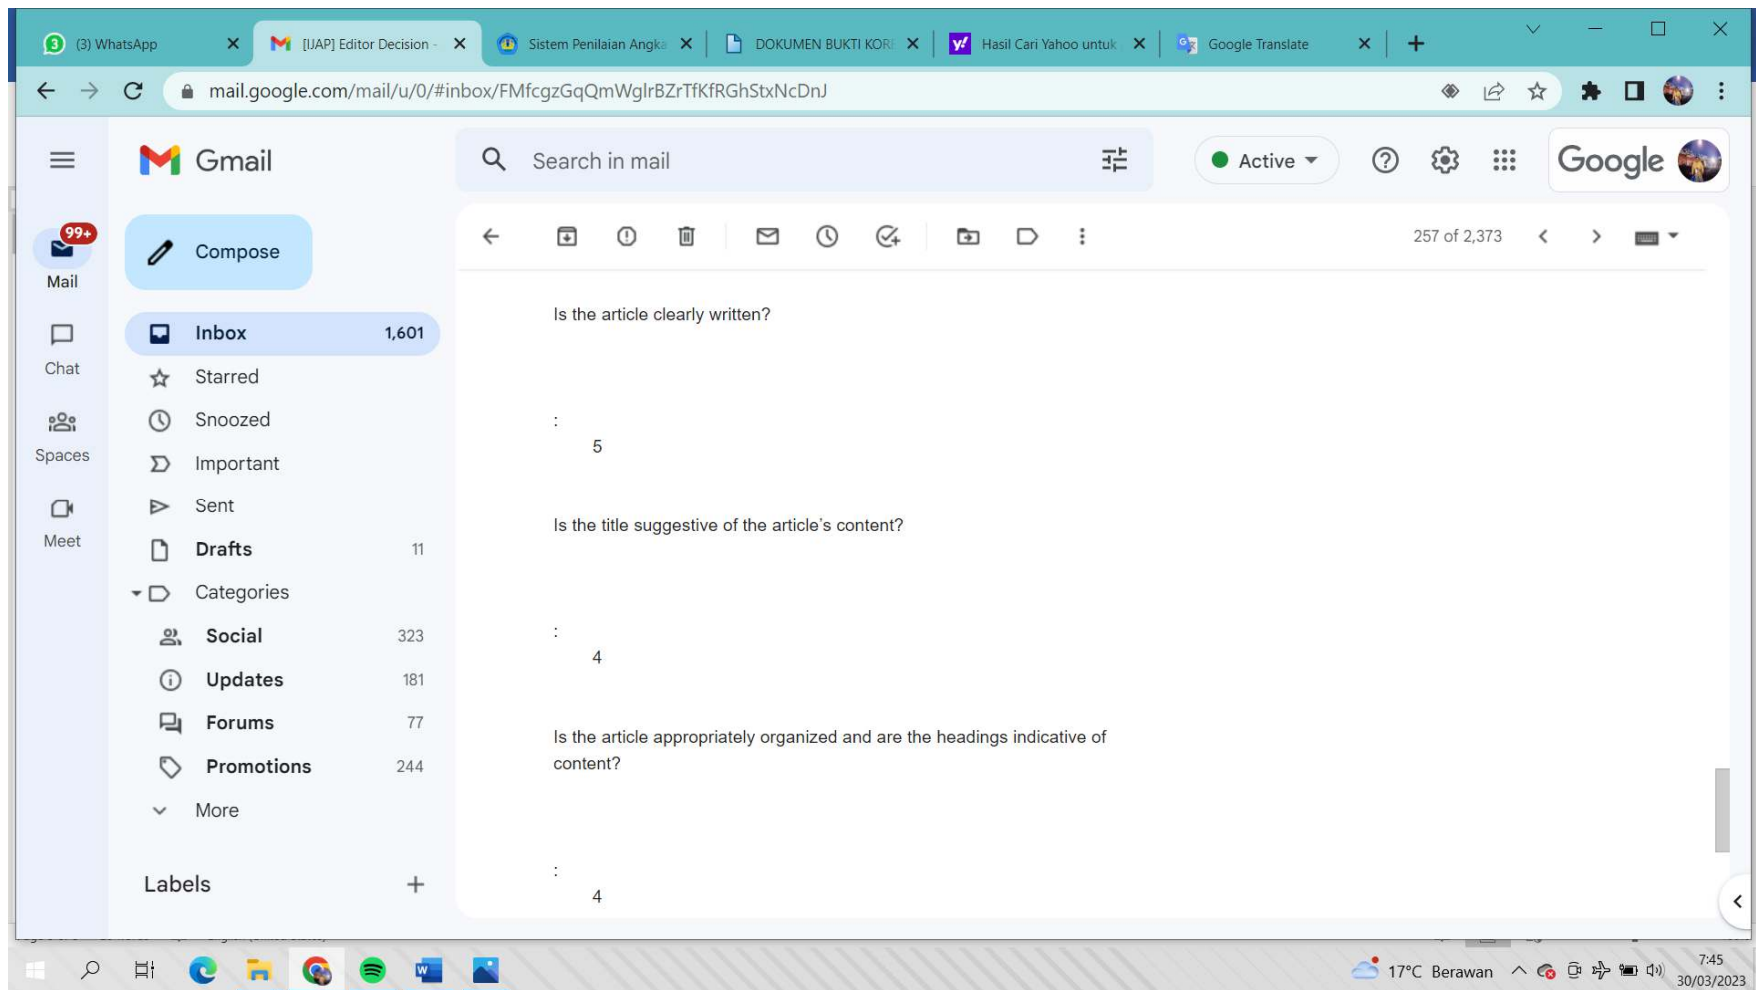

The screenshot shows a Gmail interface in a web browser. The browser's address bar displays the URL: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmWglrBZrTfKfRGhStxNcDnJ. The Gmail sidebar on the left lists folders: Mail (99+), Compose, Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and Labels (+). The main content area shows an email with the following text:

4


Reviewer's comments to the authors:

Author(s) need to revise the manuscript.

INDONESIAN JOURNAL OF APPLIED PHYSICS
<https://jurnal.uns.ac.id/index.php/ijap>

At the bottom of the email content are buttons for Reply and Forward. The Windows taskbar at the bottom shows the system tray with a temperature of 17°C Berawan, the time 7:45, and the date 30/03/2023.

5. [IJAP] SUBMISSION ACKNOWLEDGEMENT

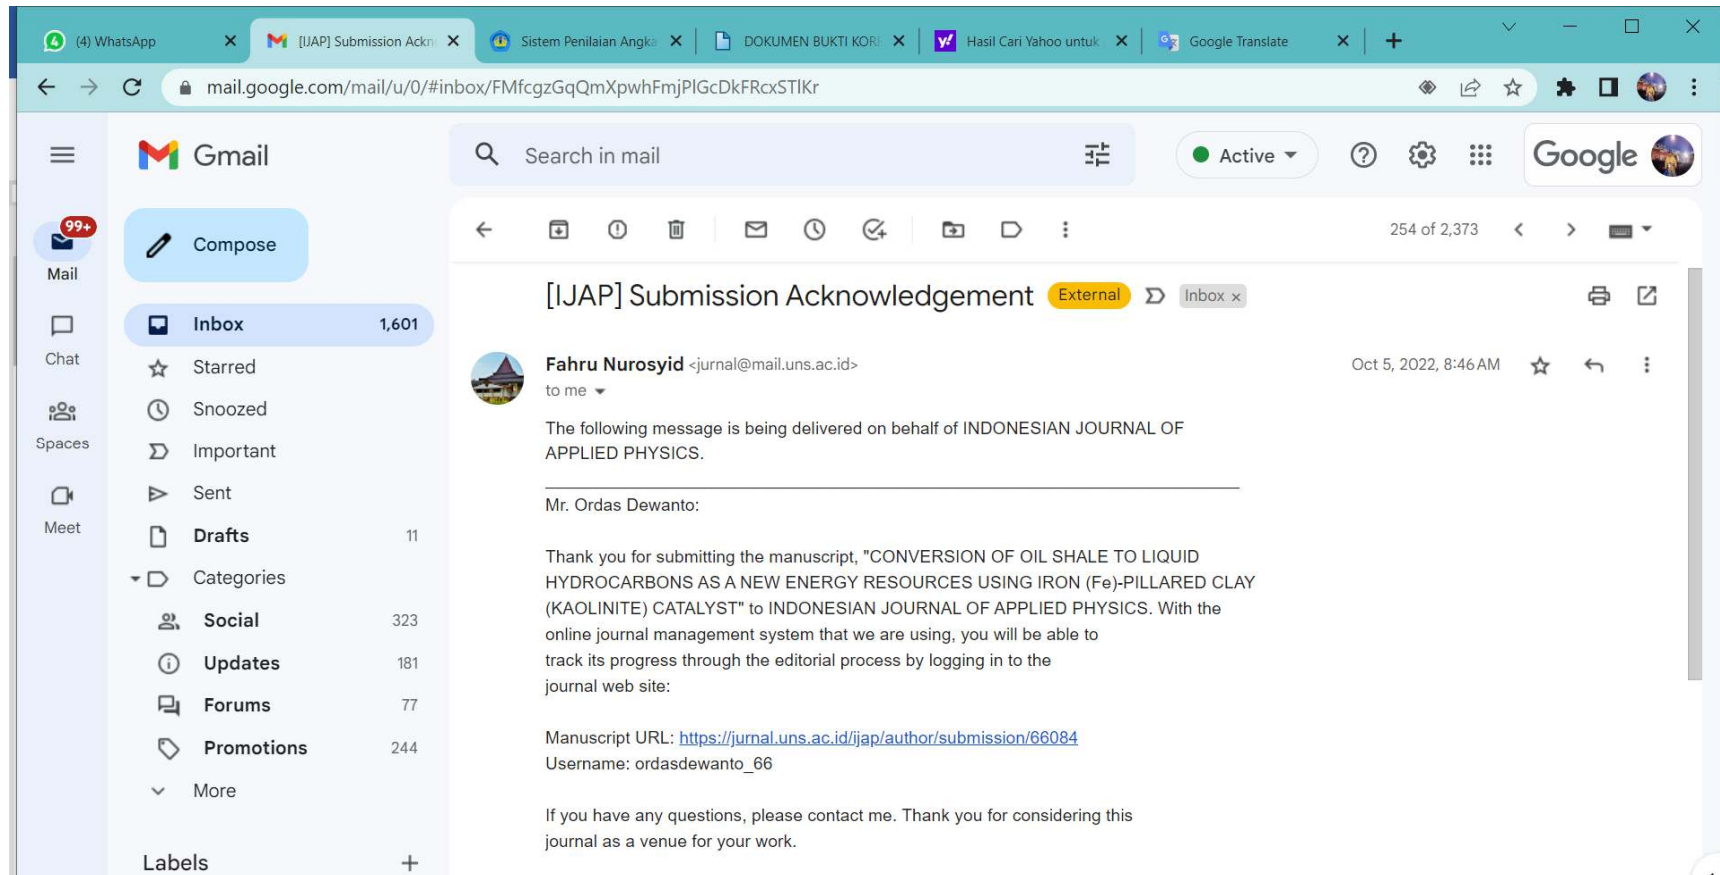

The screenshot displays a Gmail interface with a browser window. The address bar shows the URL: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmXpwhFmjPIGcDkFRcxSTIKr. The left sidebar contains navigation options: Mail (99+), Compose, Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and More. The main content area shows an email from Fahru Nurosyid (journal@mail.uns.ac.id) dated Oct 5, 2022, 8:46 AM. The email subject is "[IJAP] Submission Acknowledgement" and is marked as "External" and "Inbox x". The body text reads: "The following message is being delivered on behalf of INDONESIA JOURNAL OF APPLIED PHYSICS. Mr. Ordas Dewanto: Thank you for submitting the manuscript, "CONVERSION OF OIL SHALE TO LIQUID HYDROCARBONS AS A NEW ENERGY RESOURCES USING IRON (Fe)-PILLARED CLAY (KAOLINITE) CATALYST" to INDONESIA JOURNAL OF APPLIED PHYSICS. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site: Manuscript URL: <https://jurnal.uns.ac.id/ijap/author/submission/66084> Username: ordasdewanto_66 If you have any questions, please contact me. Thank you for considering this journal as a venue for your work."

The screenshot shows an email client interface. On the left is a sidebar with a navigation menu:

- Categories
- Social 323
- Updates 181
- Forums 77
- Promotions 244
- More
- Labels +

The main content area displays an email from Fahru Nurosyid with the subject "INDONESIAN JOURNAL OF APPLIED PHYSICS". The body of the email contains the text "INDONESIAN JOURNAL OF APPLIED PHYSICS" and a blue hyperlink: <https://jurnal.uns.ac.id/index.php/ijap>. Below the text are two buttons: "Reply" and "Forward".

The Windows taskbar at the bottom shows the system tray with a temperature of 17°C Berawan, the time 8:56, and the date 30/03/2023. The taskbar also contains icons for various applications including Microsoft Edge, File Explorer, Google Chrome, Spotify, and Microsoft Word.

6. [IJAP] EDITOR DECISION

The screenshot shows a Gmail interface with a browser window. The browser tabs include WhatsApp, [IJAP] Editor Decision, Sistem Penilaian Angka, DOKUMEN BUKTI KOR, Hasil Cari Yahoo untuk, and Google Translate. The address bar shows the Gmail URL. The Gmail interface includes a search bar, a left sidebar with navigation options (Compose, Mail, Chat, Spaces, Meet), and a main content area displaying an email.

[IJAP] Editor Decision External Inbox x

Fahru Nurosyid <jurnal@mail.uns.ac.id> to me Wed, Oct 5, 2022, 9:46 AM

The following message is being delivered on behalf of **INDONESIAN JOURNAL OF APPLIED PHYSICS**.

Dear Dr. Ordas Dewanto:

We have reached a decision regarding your submission to **INDONESIAN JOURNAL OF APPLIED PHYSICS**, "Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst".

Our decision is to: **Accept Submission**

Sorja Koesuma
(SCOPUS ID: 56596816400, h-index : 3), Physics Department, Universitas
Sebelas Maret
sorja@staff.uns.ac.id

INDONESIAN JOURNAL OF APPLIED PHYSICS
<https://jurnal.uns.ac.id/index.php/ijap>

The Windows taskbar at the bottom shows the system tray with the date 30/03/2023 and time 9:03, and a stock market indicator for IHSG at +1.17%.

The screenshot shows a Gmail interface in a web browser. The browser's address bar displays the URL: mail.google.com/mail/u/0/#inbox/FMfcgZGqQmXpwmkrvggkSQWZsGBtQQzh. The Gmail sidebar on the left lists folders: Mail (99+), Compose, Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and More. The main content area shows an email titled "[IJAP] Editor Decision" with an "External" label and "Inbox" tag. The sender is Fahru Nurosyid (jurnal@mail.uns.ac.id) and the date is Wednesday, October 5, 2022, at 9:46 AM. The email body contains the following text:

The following message is being delivered on behalf of **INDONESIAN JOURNAL OF APPLIED PHYSICS**.

Dear Dr. Ordas Dewanto:

We have reached a decision regarding your submission to **INDONESIAN JOURNAL OF APPLIED PHYSICS**, "Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst".

Our decision is to: Accept Submission

Sorja Koesuma
(SCOPUS ID: 56596816400, h-index : 3), Physics Department, Universitas
Sebelas Maret
sorja@staff.uns.ac.id

INDONESIAN JOURNAL OF APPLIED PHYSICS
<https://jurnal.uns.ac.id/index.php/ijap>

The Windows taskbar at the bottom shows the system tray with the date 30/03/2023 and time 9:06, and the text "Hujan hari ini" (It rains today).

7. [IJAP] COPYEDITING REVIEW REQUEST

The screenshot shows a Gmail interface with a browser window. The browser tabs include (4) WhatsApp, [IJAP] Copyediting Review, Sistem Penilaian Angka, DOKUMEN BUKTI KOR, Hasil Cari Yahoo untuk, and Google Translate. The address bar shows the Gmail URL. The Gmail interface includes a search bar, a left sidebar with navigation options (Compose, Mail, Chat, Spaces, Meet), and a main content area displaying an email.

[IJAP] Copyediting Review Request External

Fahru Nurosyid <jurnal@mail.uns.ac.id> to me

Wed, Oct 5, 2022, 9:48 AM

The following message is being delivered on behalf of **INDONESIAN JOURNAL OF APPLIED PHYSICS**.

Dear Dr. Ordas Dewanto:

Your submission "Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst" for **INDONESIAN JOURNAL OF APPLIED PHYSICS** has been through the first step of copyediting, and is available for you to review by following these steps.

1. Click on the Submission URL below.
2. Log into the journal and click on the File that appears in Step 1.
3. Open the downloaded submission.
4. Review the text, including copyediting proposals and Author Queries.
5. Make any copyediting changes that would further improve the text.
6. When completed, upload the file in Step 2.
7. Click on METADATA to check indexing information for completeness and accuracy.

The bottom of the screenshot shows the Windows taskbar with the system tray displaying 21°C Berawan, 9:11, and 30/03/2023.

The screenshot shows a Gmail inbox on a desktop browser. The left sidebar contains navigation options: Mail (99+), Compose, Inbox (1,601), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and Labels (+). The main content area displays an email with the following text:

7. Click on METADATA to check indexing information for completeness and accuracy.
8. Send the COMPLETE email to the editor and copyeditor.

Submission URL: <https://jurnal.uns.ac.id/ijap/author/submissionEditing/58414>
Username: ordasdewanto_66

This is the last opportunity to make substantial copyediting changes to the submission. The proofreading stage, that follows the preparation of the galleys, is restricted to correcting typographical and layout errors.

If you are unable to undertake this work at this time or have any questions, please contact me. Thank you for your contribution to this journal.

Sorja Koesuma
(SCOPUS ID: 56596816400, h-index : 3), Physics Department, Universitas
Sebelas Maret
sorja@staff.uns.ac.id

INDONESIAN JOURNAL OF APPLIED PHYSICS
<https://jurnal.uns.ac.id/index.php/ijap>

The browser's address bar shows the URL: mail.google.com/mail/u/0/#inbox/FMfcgzGqQmXpwmICCZNHNFDcDfZwqHxD. The Windows taskbar at the bottom shows the date and time as 9:12 on 30/03/2023, and the temperature as 21°C in Berawan.

8. HASIL REVISI TELAH DISUBMIT KEMBALI

User


You are logged in as...
ordasdewanto_66

» [My Journals](#)











» [My Profile](#)


» [Log Out](#)

00110999
[View My Stats](#)

 **statcounter**



Visitors

 69,390	 238
 7,065	 235
 754	 203
 307	 192
 293	 150

 **FLAG counter**

Editor Decision

Decision: Accept Submission 2022-10-05

Notify Editor:  Editor/Author Email Record  2022-10-05


Editor Version: **58414-183962-1-ED.doc** 2022-10-05


Author Version: **58414-183958-1-ED.doc** 2022-10-05 [Delete](#)

Upload Author Version: No file chosen

Citedness

as Scopus Secondary Documents

 Scopus


 The new, enhanced version of the search results page is available. [View the new](#)

41 secondary document results

Results from references for query: 00110999 ("Indonesia journal of applied physics")

(last Updated : Sept 30 th 2022)

Citations according to [Google Scholar](#): 823 (h-index: 13)

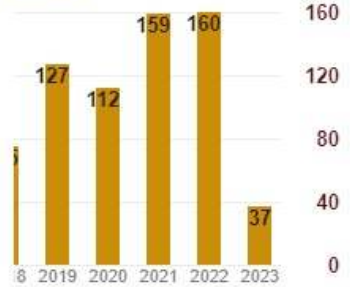

Year	Citations
2018	10
2019	127
2020	112
2021	159
2022	160
2023	37

Citation Statistic by [Author My ID](#)

9. REVISI DAN HASIL REVISI

CONVERSION OF OIL SHALE TO LIQUID HYDROCARBONS AS A NEW ENERGY RESOURCES USING IRON (Fe)-PILLARED CLAY (KAOLINITE) CATALYST

Ordas Dewanto¹ and Istifani Ferucha²

¹Geophysical Engineering, University of Lampung, Lampung
ordas.dewanto@eng.unila.ac.id

²Geophysical Engineering, Bandung Institute of Technology, Bandung
istifaniferucha@gmail.com

Received, Revised, Accepted, Published

ABSTRACT

In the context of new energy exploration, oil shale is currently a source of energy that is being developed so that it can be used as an alternative energy in the future. Based on this background, it is important to research the conversion method of oil shale to liquid hydrocarbons. The method used is using clay (kaolinite) catalyst and iron (Fe)-pillared clay (kaolinite) catalyst. Clay catalyst products are capable of making organic mature faster and even requiring a lower temperature for the changes (through thermal cracking of non-volatile organic material). The addition of Fe metal in the clay catalyst product to oil shale, causing the surface area of the natural clays were significantly increased, then the volume of micro pore were also increased, it causes the organic material to mature faster and the temperature required for the change is less than the shale material without Fe. The catalyst method by the pillarization technique able to increase the surface area and pore volume, thus accelerating the reaction and changing the reaction rate to be greater. It is observed that clay catalyst products can serve as catalysts for accelerating organic maturation reactions. if compared between the clay material of OD1-Ast1 (50% clay-50% organic), OD1-Ast2 (33% clay-67% organic), and the OD1-Ast3 shale material (67% clay - 33% organic), then OD1-Ast3 has a faster reaction rate. Comparison of clay material is smaller than organic, then the properties of the catalyst product to accelerate the reaction are reduced, such as the OD1-Ast2 shale material has a slow reaction rate compared to the OD1-Ast3 shale material. The addition of Fe metal in the clay catalyst product to the OD1-Ast2 shale material, resulting in OD1-Ast2-Fe shale material (75% OD1-Ast2 and 25% Fe) having a faster reaction rate than before the addition of Fe metal. The design of heavy (%) clay (kaolinite) and Fe pilaration on oil shale were greatly influence the change of TOC values when heated, then affecting maturation and Tmax. The temperature of maturation and Tmax as the main parameters of conversion of oil shale to liquid hydrocarbon. This method supports the development of science and technology in the field of exploitation and processing of natural resources.

Keywords : oil shale, clay, iron (Fe)-pillared, maturation, TOC, Tmax.

INTRODUCTION

The consumption of fossil fuel is still increasing, but the oil reserves are decreasing. The serious problem faced by the Indonesian nation is the provision of energy for the next ten years, and it is predicted that oil and gas will remain an important source of primary energy, particularly to meet the needs of the transportation and industrial sectors. According to Barkia et al [1], energy supply has been a worldwide problem for the last few decades.

Commented [TBN1]: Paraphrase the sentence

Commented [nr2R1]: already justified

Many countries have sought to cope with rising oil prices and their effects on the economy. Mobilization of national energy resources becomes an important task for many countries for economic development and social progress. Al-Hamaiedh [2] said that in Jordan high oil consumption and reduction of crude oil reserves are expected to increase the energy crisis, therefore the search for alternative energy exploration becomes so important. The cost of imported energy is a burden to the national economy and there are still some countries experiencing similar problems.

Currently, exploration of new and renewable energy sources is still a top priority in the exploration of energy sources. According to Kantsler and Cook [3], oil shale contains a lot of immature organic material, when heated to a certain temperature, its organic content matures and changes physically and chemically, so as to produce new energy that is fluid hydrocarbon.

Berraja et al [4] initiated research on thermal analysis study on oil shale burning in Tarfaya. Although the methods used are not efficient yet, but the results of the study produce a fairly sophisticated heating theory today, namely pyrolysis method.

Then Bartis et al [5] conducted research by collecting oil shale, then stored in a place and burn directly to be used as a source of electrical energy. Bartis et al also did the mining of underground oil shale using space and pillar method. Burnham et al [6] continued Bartis's research by extracting the results of oil shale processing, which is done on the ground (ex-situ processing), although there were several new technologies extracting the results of underground shale processing at the site or in-situ processing .

Research on conversion technology involving oil shale heating in the absence of oxygen to the temperature at which the material decomposes into gas, condensed oil, and solid residue. This usually occurs at temperatures between 450°C (842°F) and 500°C (932°F) [7]. The decomposition process begins at a relatively low temperature (300°C/570°F), but faster and more complete results are obtained at higher temperatures [8].

Subono and Siswoyo [9] research on the nature of material undergoing physical, biological and chemical changes caused by heat, temperature and physical changes, based on the development of thermal technology in order to meet those needs, a new indicator is made to know the level maturity of organic materials, using thermal methods associated with geochemical technology and petrophysical parameters. The data can show the level of maturation of organic materials such as TAI, TTI, Ro, and so on.

Nagendrappa's [10] study of all clay minerals can catalyze various organic reactions occurring on the surface and interstitial spaces. The use of catalysts in industrial petroleum in recent years has undergone tremendous expansion, the most important of these catalysts used in the cracking process, as a consequence of the growth of catalytic cracking, became a major industry.

Xiufeng Xu et al [11] conducted a study by adding Ti into the organic clay, thus functioning as a catalyst of Clay-Organic. The results lead to high catalytic performance for methane combustion under reaction temperature 400°C-550°C. Catrinescu et al [12] presented a catalytic performance evaluation of Fe and Al based clay using powder method. Both pillared clays are very active in phenol removal, allowing the total elimination of phenol. Then Huan-Yan Xu et al [13] conducted a study of a clay catalyst based Fe-bearing that was successfully prepared and used as a heterogeneous catalyst in the Fenton system as for the acid-color change in fuchsine wastewater.

Eman and Emam [14] conducted a study of clay catalysts that have attracted much interest in catalytic applications in the petroleum industry. Clay is widely used for various processes such as catalytic cracking, hydrocracking, reformation, isomerization, hydrogenation, alkylation. The most important clays used in the manufacture of catalysts are kaolinite and monmorillonite. There are still many experts used various methods who successfully use clay as a catalyst in relation to organic,

Widjaya [15] undertook research on the development of another type of acid catalyst derived from polarized clay (bentonite) and a catalyst with two oxides (bi-oxide) in this study. Clay is used as a catalyst feedstock because it is widely available in Indonesia, and can be adjusted to a certain degree of acidity and pore size through a method of pillarization. The process of conversion of ethanol into biogasolin requires a catalyst with a sufficiently high acidity level and ranges between 2 mmol / g to 5 mmol / g. Polarized bentonite with Cr has a high acidity level of 4.09 mmol / g, whereas HZSM-5 is a commercial zeolite having 2.62 mmol / g.

Indrati et al [16] conducted a study on the determination of pellet activation energy (Th, U) Oz at the grain growth stage using dilatometer and Scanning Electron Microscope (SEM). The method is calculated by a method based on the pellet shrinkage curve. Cahyadi et al [17] conducted a study on the behavior of ignition of Indonesian coal particles using Thermogravimetric Analysis under O₂ / N₂ and O₂ / CO₂ conditions. Sato et al [18] conducted research on free energy activation that has dependence on temperature. Temperature dependence was found to be greater for calculations. The determination of activation energy, the pre-exponential factor and the reaction rate of TGA analysis refers to some of the previous research findings, such as: Katarzyna et al [19], Himawanto [20], Himawanto et al [21], Riyanto [22], Eman A. Emam [14], Yan and Zhang [23], Sugondo [24], Sukma [25], Malika et al [26], Martono dkk [27], Suyitno [28], Minarsih [29].

The amount of shale material in Indonesia is very much, so it is expected that in the next few years there will be many sources of oil and gas available. If we wait for the process of shale material into oil and gas, it will take a long time. Therefore, it is necessary to continue research of Dewanto et al [30, 31, 32 and 33] about the process of conversion of shale material into oil and gas done in the laboratory.

In response, researchers are trying to develop new energy sources and renewable energy sources, one of which is the use of oil shale as fuel. One alternative of direct utilization of oil shale is to convert oil shale into oil and hydrocarbon gas catalytically. The use of this catalytic process is very promising because all organic material in oil shale is expected to convert all into oil and hydrocarbon gas in quick time with small T_{max} value, therefore it is necessary to select suitable catalyst for the catalytic process of oil shale into hydrocarbon oil. The material used for the catalyst is clay and Fe metal. The design of heavy clay (kaolinite/illite) and Fe pillaration on oil shale greatly influenced the change of TOC values when heated thus affecting maturation and T_{max}. This temperature (T_{max}) as conversion parameter of oil shale to hydrocarbon oil.

In addition to Pyrolysis (TOC determination), other tests performed are SEM, XRD and TGA. The clay catalyst product can serve as a catalyst for accelerating organic maturation reactions. Clay material smaller than organic, the nature of the catalyst to accelerate the reaction becomes reduced. The level of organic maturation requires a long reaction process of three steps of reaction. Vice versa. The clay metal polarized clay catalyst product to the oil shale causes the heating process in oil shale material to have a faster

reaction rate than before the Fe is added. Clay catalyst products were capable of making organic mature faster, even requiring a lower temperature for the changes (through thermal cracking of non-volatile organic material). In addition to Pyrolysis (TOC determination), other tests performed are SEM, XRD and TGA. The clay catalyst product can serve as a catalyst for accelerating organic maturation reactions. Clay material smaller than organic, the nature of the catalyst to accelerate the reaction becomes reduced. The level of organic maturation requires a long reaction process of three steps of reaction. Vice versa. The clay metal polarized clay catalyst product to the oil shale causes the heating process in oil shale material to have a faster reaction rate than before the Fe is added. Clay catalyst products are capable of making organic mature faster and even the temperature required for change (through thermal cracking of non-volatile organic material) is smaller. Clay (kaolinite) is able to decrease the activation energy (E_a) of a reaction, so it is more easily exceeded by reactant molecules consequently the reaction becomes faster. The catalyst method by the pillarization technique able to increase the surface area and pore volume, thus accelerating the reaction and changing the reaction rate to be greater.

METHOD OF RESEARCH

Research Tools

The equipment used were glassware for preparation and rock cutting equipment, X-ray Diffraction (XRD) for the distribution of oxides, TGA, SEM to determine the concentration of species/oxide characteristics, Pyrolysis, FTIR.

Main Research Materials

In this research, the materials used were oil shale ($TOC \geq 12\%$) and natural clay (kaolinite/illite) obtained from the coring at a certain depth in the area of X Sumatra.

Method

Figure 1 shows coring on facies type A, B and C.

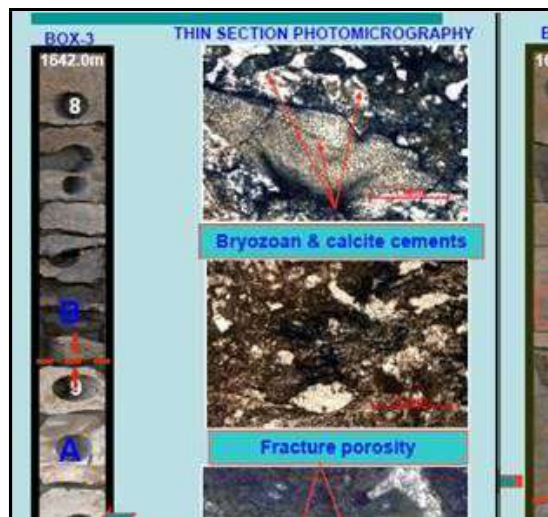


Figure 1. Type of material extracted from the Core on Facies A, B and C.

Commented [TBN3]: I strongly suggest that you mention the location/ area of research because it describes the origin of core/ rock cutting

Commented [nr4R3]: Sumatera Selatan

Determination of Oil Shale Material

The stage of material determination was the most important stage in material selection. Selecting the material from the drilling coring results, then grouped, namely the calcite type oil shale (CaCO_3) and the kaolinite or illite oil shale group.

Characterization of Oil Shale Materials

The tools used for oil shale characterization are SEM and XRD, to determine the identity of the material. SEM for information about the state of the material, eg the type of elements present, and the distribution, topography or surface shape. XRD techniques can also model the type of compound, the percentage of the compound and its crystallographic characteristics.

TGA Test on Clay-Organic Materials

Thermogravimetry is a technique for measuring the weight change of a compound as a function of temperature or time. The result is a continuous diagram recording; schematic one-stage decomposition reactions. The two main types of thermal analysis techniques are thermogravimetric analyzers (TGAs), which automatically record changes in sample weight as a function of temperature and time, and thermal differential analysis (DTA) that measures temperature differences, T , between samples with inverted referent material as function temperature.

Pyrolysis Testing

Pyrolysis analysis was used to identify the type and maturity of shale materials as well as to detect the hydrocarbon content in shale material. The sample selected for Pyrolysis analysis is the previously destroyed sample then dried. The Pyrolysis Method consists of a temperature heater (oven) at an inert atmospheric temperature (helium) and a sample of 100 mg to determine:

- a. Free hydrocarbons in the sample (clay-shale, carbonate-shale and oil shale).
- b. Hydrocarbon and oxygen compounds that evaporate from the cracking process of organic material material in the sample (clay-shale, carbonate-shale and oil shale).

Maximum Temperature (T_{max})

T_{max} is the maximum temperature to release hydrocarbons from the cracking process of material mixtures that occur during pyrolysis (peak S2). The recorded T_{max} value is influenced by several types of material mixtures mentioned above. Thermal maturity level was measured from T_{max} . For example: If the value of $T_{max} < 435^\circ\text{C}$ shows the clay-shale, the above-mentioned carbonate-shale and oil shale were still immature. If the T_{max} value between $435\text{-}470^\circ\text{C}$ indicates in the condition of thermal maturity. Whereas if $T_{max} > 470^\circ\text{C}$ indicates over mature. The pyrolysis graphic is called a pirogram.

Material Testing of Oil Shale To Liquid Hydrocarbons Conversion

To know the reaction of oil shale to liquid hydrocarbon conversion, we used some analysis and testing data on oil shale material (clay and carbonate). T_{max} value were one of the chemical parameters used to determine the maturity level of oil shale. The process was part of the pyrolysis test which is the initial test of shale material in the conversion reaction. Pyrolysis analysis was also used to identify the type and maturity of shale materials as well as to detect the hydrocarbon content in shale material. T_{max} is the maximum temperature for removing hydrocarbons from the cracking process of material

Commented [TBN5]: Explain more about pyrolysis testing/ experiment in sentences e.g. room temperature, pyrolysis furnace, etc

Commented [nr6R5]: has been briefly explained

mixtures occurring during pyrolysis (peak S2), then the oil shale has become a testable oil with a heating according to the analysis, then conducted simple combustion.

RESULTS AND DISCUSSION

Result of Material Determination

Determination of Oil Shale Material

The stage of material determination was the most important stage in material selection. Starting from coring on each known material, then grouped according to requirement. Materials needed were clay material kaolinite or illite type.



Figure 2. Clay material that has been formed into pellets.

The clay material that has been formed into a pellet with variations in diameter size is shown in Figure 2, where the material was dry. Some clay materials used were materials with sample numbers OD1 and OD2.

Determination of Organic Materials

The selected organic material were organic material of cyclic group of compounds: naphthalene and salicylic acid and aliphatic organic compounds in the form of: stearic acid and lauric acid. Organic materials used were materials with Ast sample numbers (Stearic Acid) and Asl (Salicylic Acid). Used the organic material because it corresponds to the content present in oil shale. The amount of organic content of rocks or shale materials is usually expressed at the price of TOC (Total Organic Carbon).

Clay-Organic Material Sampling

The results of pyrolysis testing showed that organic clay (OD1-Ast, OD2-Ast) were successfully prepared as samples such as shale material, since they have the same main characteristics, as shown in Table 1.

Table 1. The results of pyrolysis testing on clay-organic synthesis and organic-carbonate synthesis.

Shale Materials (Kerogen Type II)	Clay-Organic (Synthesis)
<ul style="list-style-type: none"> • Shale or clay • Organic materials • TOC > 12,0% 	<ul style="list-style-type: none"> • Clay (kaolinite/illite) • Stearic acid • TOC ≥ 12,0%

Figure 3 shows the description of the type of material up to the processing in the laboratory, starting from the coring process, material selection, clay-organic material sampling, up to the tests. The results of pyrolysis testing on clay-organic synthesis indicate that the synthesis of the material was very good as shale material.

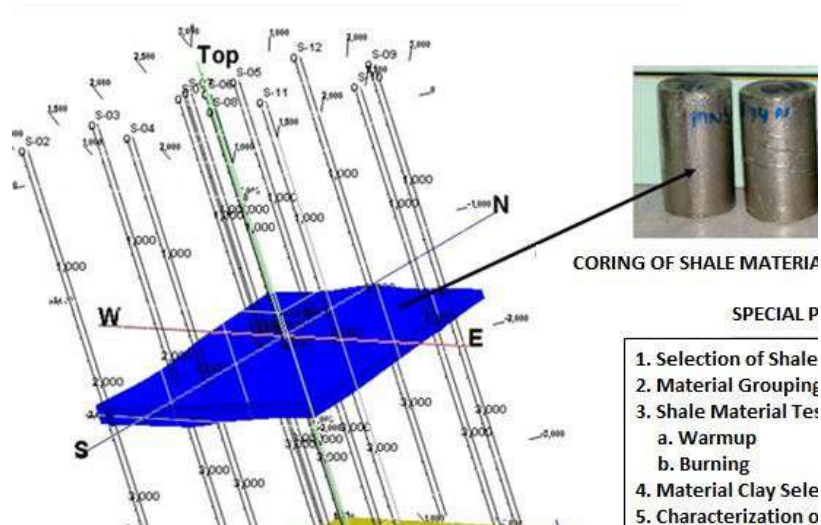


Figure 3. The coring process, starting from the determination of the type of material to the processing in the lab.

TOC (Total Organic Carbon) Test Results

TOC testing was successfully performed on clay-organic material samples (OD2-Ast). TOC test results on the shale material samples are shown in Table 3.2. This TOC values were used as one of the parameters for the initial selection stage of the material selection to be used as shale material.

Table 2. TOC (Total Organic Carbon) Test Results

Sample Name	TOC (%)
OD2-Ast1 (Clay 50% + Organic 50%)	19.94
OD2-Ast2 (Clay 33% + Organic 67%)	34.38
OD2-Ast3 (Clay 67% + Organic 33%)	11.98

Shale material can be separated between shale materials that were good or not good to serve as the basis for further processing on shale materials. Two clay-organic materials have shown excellent quality, which has TOC value of 12.0%, while an organic clay material (OD2-Ast3) shows good quality, although TOC value was only close to 12.0%, but can still be used as shale material to be tested.

Commented [TBN7]: Excellent quality, over or exact 12%?

Commented [nr8R7]: right in theory

Results of Analysis Using SEM

The selected shale material was characterized using SEM. The purpose was to know the morphology, particle size, material content, pores of the material and the elements contained.

SEM Analysis of Clay Material

Figure 4 shows the Edax-SEM result of clay material OD2 and Figure 5 is the result of a SEM image of clay material OD1, visible cubby shapes covered in white like snow. Such

conditions indicate that the clay has the dominant kaolinite type. Seen in Figure 4 and 5 that the main constituent minerals are clay minerals.


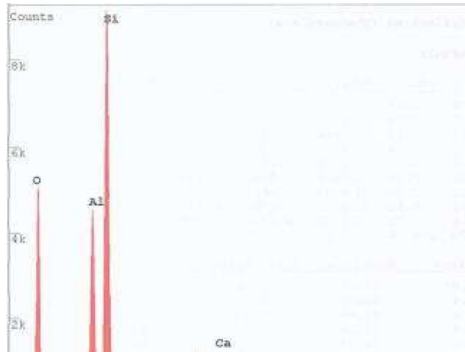


Figure 4. SEM results of clay material OD2.

In more detail the constituent is dominated by alloys of ilit and kaolinite clay, which show the texture of crenulation and hairy. Also present oil traces or oil droplets/bitumen. It also appears that the shale have undergone a diagenetic process characterized by the presence of autogenic clay minerals that form alloys of clay sheets. From the results of Edax, OD1 and OD2 materials have a very large content of Al, Si and O (dominant).

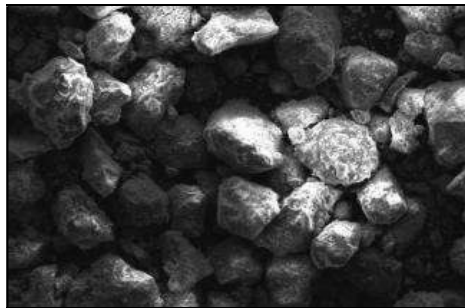

Element	Wt %	Mol %	K-Ratio	Z	A
Na2O	1.91	2.02	0.0058	0.9618	0.42
MgO	4.91	7.99	0.0168	0.9859	0.57
Al2O3	18.92	12.18	0.0661	0.9570	0.68
SiO2	67.03	73.21	0.2169	0.9849	0.70
SO3	1.08	0.89	0.0029	0.9692	0.68
K2O	1.84	1.28	0.0127	0.9338	0.88
CaO	0.56	0.65	0.0035	0.9560	0.91
TiO2	0.57	0.47	0.0029	0.8730	0.96

Figure 5. SEM image results of clay material OD1.

From the result of analysis by using SEM, it was known that clay morphology was kaolinite type (OD2 and OD1). Both images show a similarity that has a morphology with a large particle size and wider space, it indicates that the specific surface area was larger, so the volume of micro part was also larger. Since the nature of this clay can not expand upon contact with water, it was substantially expanded by expanding the surface area and cavities.

SEM Analysis of Organic Materials

Figure 6 shows the results of SEM and Edax image of stearic acid organic material ($C_{17}H_{35}COOH$), which is a moderately large number of chelated aliphatic (over C_{25}) compounds and most of the naphthene (cyclic chain). While the organic material salicylic acid ($C_7H_6O_2$) is shown in Figure 7.

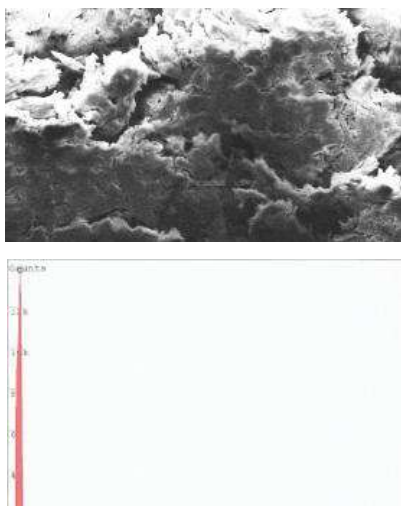


Figure 6. SEM photo results of organic material Stearic Acid (Ast).

From the Edax results, the organic material has a very large C and O content (dominant). Both organic materials were included in Kerogen type II which can be formed from several different sources of marine algae, pollen and spores, plant wax layers, fossil resins, and otherwise can also come from plant fat. This occurs as a result of the mixing of an autochthon organic material in the form of phytoplankton (and possibly also zooplankton and bacteria) together with allochthon material dominated by materials from plants such as pollen and spores.

This mixing shows a combination of characteristics between type I and type III kerogen. In this type of material was also often found large amounts of sulfur in cyclic chain and possibly also in sulphide bonds. The result of the SEM photo looks like a white blob that binds to each other. In this type of material was also often found large amounts of sulfur in cyclic chain and possibly also in sulphide bonds.

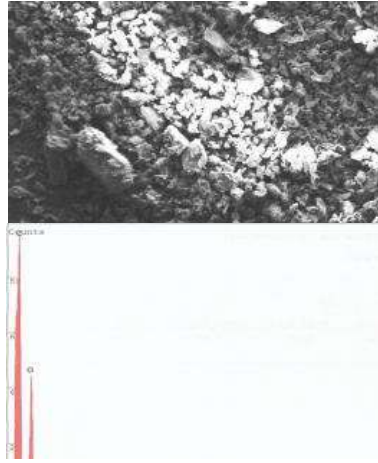


Figure 7. SEM photo results of organic material Salicylic acid (Asl).

SEM Analysis of Shale Material

After obtaining the appropriate organic container, the material was made of clay-organic OD1-Ast2, OD2-Ast2 (with 33% kaolinite mixture composition and 67% stearate acid on both sizes of the powder). Then the mixture was stirred and pressed slowly, then stored for 48 hours and stirred again and pressed again slowly, aiming for the organic material to fill evenly across the pores of the clay container material. Furthermore, the shale material was kept for at least 48 hours, the goal was for organic materials trapped (fill) pores and more binding and compact. The pores of shale material that has been filled organic become smaller, it can be indicated clay container was successfully filled / bound by organic, because it becomes smaller pores.

The pores were narrowed due to the organic matter and the pores were also covered by kaolinite evenly, in the picture the organic material is clearly identified, can be seen from the results of SEM analysis in Figure 8 and 9. The most important characteristic was that the shale material that has been made has a TOC value of $\geq 12\%$, which indicates the properties of a good oil shale according to the reference. With the synthesis method as mentioned above, the results obtained in Figures 8 and 9.

Clay-shale that have formed have small pores, not even seen at all, because all the pores were filled with organic material and accumulate and strongly bonded with kaolinite or some other small material percentage. The material that covered the pores that were filled with organic material, is evident in Figures 8 and 9. White color like the sky shows clay that binds strongly with organic material, so the shape of the clay shale becomes like a clump of white cloud, which covers all the pores evenly. This condition was expected, because the clay-shale was successfully represent the oil shale to be tested for the basis of processing oil shale into crude oil (STM).

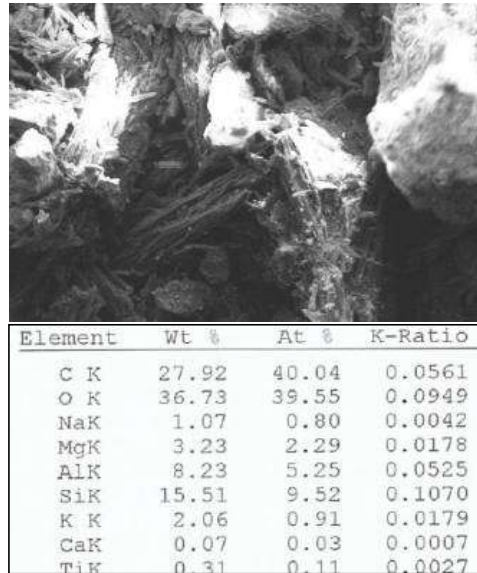


Figure 8. SEM image results of OD1-Ast2 material

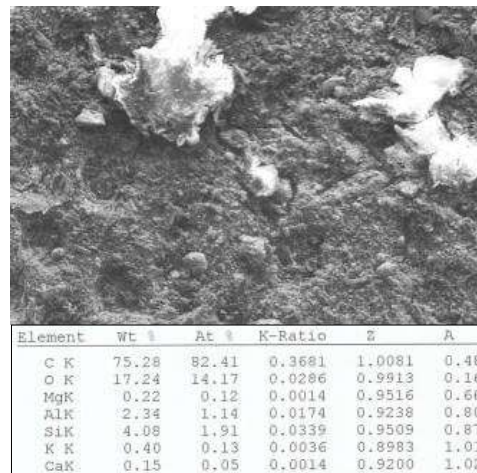


Figure 9. SEM image results of OD2-Ast2 material.

The results of Edax SEM of clay-shale OD2-Ast2 contain several elements with (wt,%) as follows: Carbon (75.28%), Oxygen (17.24%), Magnesium (0.22%), Aluminum (2.34%), Silicon (4.08%), Potassium (0.40%), Calcium (0.15) and Iron (0.29%). The results of Edax SEM of clay-shale OD1-Ast2 contain several elements with (wt,%) as follows: Carbon (27.92%), Oxygen (36.73%), Sodium (1.07%), Magnesium (3.23%), Aluminum (8.23%), Silicon (15.51%), Potassium (2.06%), Calcium (0.07), Ti (0.31%) and Iron (4.86%).

Then made the same clay material, ie clay-shale OD2-Ast1 (with 50% kaolinite mixture composition and 50% stearate acid on both sizes of the powder), OD1-Ast3 (with a mixture of 67% kaolinite and stearic acid 33% on both sizes of the powder). The result of the SEM image was not much different from OD1-Ast2 and OD2-ast2, the difference was only on its Edax result, ie content (wt%) in C, O and Si.

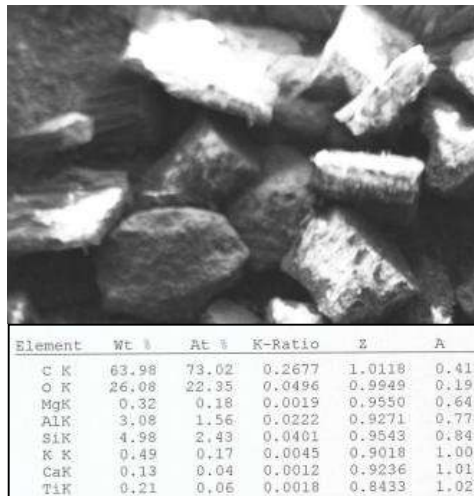


Figure 10. SEM image results of clay shale-Fe OD2-Ast2.

Then analyze clay shale-Fe with SEM and Edax images. From the overall results of SEM analysis on clay shale obtained SEM-Edax image results from clay-organic (clay shale) and clay shale-Fe. Both images when observed will show the difference that clay shale (see OD2-Ast2) have denser morphologies and smaller particle sizes than clay shale-Fe. clay shale-Fe have large particle sizes and their sockets were also wider, indicating that they were homogeneous and there has been a pillarization of the Fe metal, so that the specific surface area was larger, so the micro volume of the chamber was also larger. The Edax results was not differ greatly for the two materials, the only difference was in the material which arises from the Fe element more artificially, and the addition of Fe makes the surface area and pore volume larger, so it was expected to accelerate the reaction of organic changes. Comparison of SEM and Edax results of clay shale and clay shale-Fe can be seen in Figures 8, 9 and 10.

X-ray Diffraction (XRD) Measurement

The characterization of x-ray diffraction in clay-organic material aims to determine the distance of basal space (d_{001}) of natural kaolinite and clay which has been mixed with organic material (stearic acid and salicylic acid). With the same purpose the characterization of x-ray diffraction is also done on the organic-calcite material.

Figure 11 shows graphs of XRD results of shale materials (clay-organic) OD1-Ast1, OD1-Ast2, OD1-Ast3 and OD1-Ast3-Fe. XDD test results on OD1-Ast1 shale material when viewed with HSP (High Score Plus) software for the OD1-Ast1 shale material, obtained the 2 highest peaks at different 2-theta angles.

From Figure 11 it can be seen that in the sample material (clay-organic) OD1-Ast1 has 2 peak at position 2θ 21.6470 $^{\circ}$ and 26.6948 $^{\circ}$ with the intensity value captured by X-ray detector was 45724.46 cts and 14014.17 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

Then for samples of shale material (clay-organic) OD1-Ast2 also has 2 peak at 2θ position 21.6407 $^{\circ}$ and 26.6894 $^{\circ}$ with intensity value caught by X-ray detector were 63968.05 cts and 8967.09 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

Then for samples of shale material (clay-organic) OD1-Ast2 also has 2 peak at 2θ position 21.6407 $^{\circ}$ and 26.6894 $^{\circ}$ with intensity value caught by X-ray detector were 63968.05 cts and 8967.09 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

The shale material (clay-organic) OD1-Ast3 also has the 2 highest peaks (peak) at 2θ positions 21,5889 $^{\circ}$ and 26.6296 $^{\circ}$ with intensity values captured by X-ray detectors respectively 25422.63 cts and 19293.06 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

The results of the last XRD characterization were performed on the shale material added with Fe. From Figure 11 it can be seen that in the sample material of clay (organic clay) OD1-Ast3-Fe also has two peak at the same angle position with OD1-Ast1, OD1-Ast2, and OD1-Ast3 at angles 21.6150 $^{\circ}$ and 26.6665 $^{\circ}$ with intensity values captured by X-ray detectors were 6800.48 cts and 1059.31 cts respectively. The peak formed was also the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

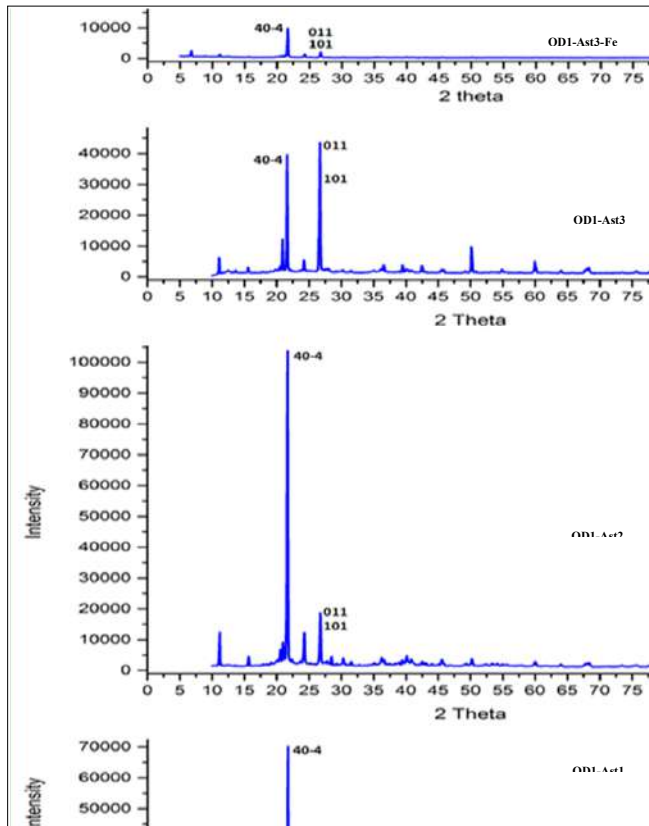


Figure 11. Result of XRD characterization of shale material (clay-organic) and +Fe.

The Result of Thermogravimetry Analysis (TGA)

Thermal analysis can be defined as measuring the physical and chemical properties of the material as a function of temperature. The two main types of thermal analysis techniques are thermogravimetric analyzers (TGA), which automatically record changes in sample weight as a function of temperature and time, and thermal differential analysis (DTA) that measures temperature differences, T , between samples with inverted referent material as function of temperature.

The Result of TGA Test of Clay-Organic Materials (Kaolinite and C18H36O2)

Further testing with TGA was done on OD1-Ast2 material ie testing on clay shale with mixed clay 33% composition and 67% stearic acid on both sizes of the powder. Testing of this mixture to determine the damage to the structure on the material when heated at high temperatures (more than 400°C), because it can provide an overview of the process of mass changes in a material. From the results of testing with TGA, obtained graphs in Figure 12.

Commented [TBN9]: Need correction

Commented [nr10R9]: already justified

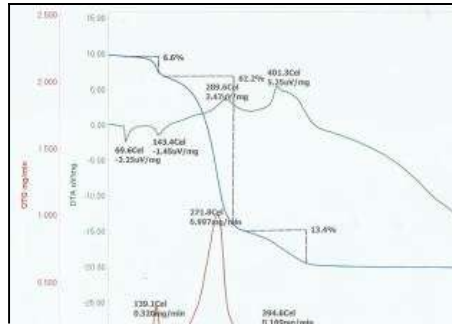


Figure 12. Graph of Thermogravimetry Analysis (TGA) of clay (OD1-Ast2).

From the results of the TGA test on OD1-Ast2 as shown in Figure above, it was found that the perfect phase change occurs at a temperature of about 305 °C, thus slightly higher than that of the perfect phase change in clay shale (OD1-Ast3). The first weight change at temperatures of about 160 ° C is the loss of water molecules contained in the crystal structure. While at a temperature of 305 ° C represents a significant second change of weight indicated was a structural change in clay material (OD1-Ast2) and the loss of water molecules chemically. When calcination was done at 470 ° C, many molecules in the clay shale (OD1-Ast2) was removed, which will affect the pore size change.

Then, a TGA test was performed on an OD1-Ast1 material that was tested on clay shale with a clay mixture composition of 50% and 50% stearate acid on both sizes of the powder. This test was performed to determine the structural damage to the material at the time of heating at high temperature (more than 400 ° C), because it can give description of the process of mass change of a material. From the test results with the TGA, the graphs obtained as shown in Figure 13.

From the results of the TGA test on clay shale as shown in Figure 13, it was found that the decrease in the percentage weight of clay shale occurred at $\pm 198^{\circ}\text{C}$ temperature, indicating that the water molecule was detached from the crystal structure on the clay shale. Then another decline occurs which is a perfect phase change occurs at temperatures around $\pm 285^{\circ}\text{C}$. The first weight change was the loss of water molecules contained in the crystal structure, whereas a significant second weight change was indicated a structural change in clay shale material and the loss of water molecules chemically. The weight loss before the decline at the last temperature was indicated the maximum temperature required for clay shale to start turning into oil shale. Whereas when calcination continues until from the last decline to constant, ie, at 425°C , many molecules in the clay shale was removed, so that there was a part of the shale in the pores that are released as well. This condition was referred to as over mature, where the graph line has shown a horizontal straight tendency with increasing temperatures up to 800°C , indicating that the material has been damaged and can not be used as oil shale material. Physically it can also be seen that the material that has been calcined at temperatures above 525°C becomes blackish. Thus the temperature required for the process of converting oil shale into crude oil required an ambient temperature of $\pm (285^{\circ}\text{C}-425^{\circ}\text{C})$.

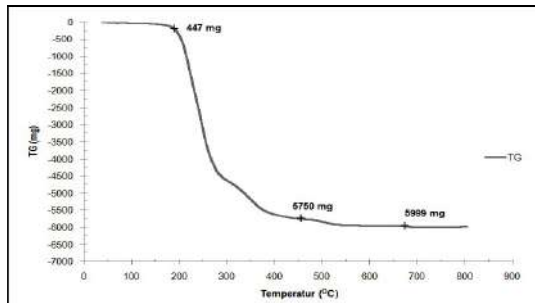


Figure 3.12. Graph of Thermogravimetry Analysis (TGA) of clay (OD1-Ast1)

Next, TGA testing was performed on OD1-Ast3 material that material with mixture composition of 67% clay and 33% stearic acid on both sizes of the powder. From the test results with the TGA, the graphs obtained as shown in Figure 3.13.

The results of the TGA test shown in Figure 3.13, it was found that the percentage decrease in weight of clay shale (OD1-Ast3) occurred at $\pm 140^\circ\text{C}$, indicating the water molecule detached from the crystal structure of the oil shale. Then another drop occurs which is a perfect phase change occurring at a temperature of about $\pm 300^\circ\text{C}$

The first weight change was the loss of water molecules contained in the crystal structure, whereas a significant second weight change was indicated a structural change in oil shale material and the loss of water molecules chemically. The weight loss before the decline at the last temperature indicated the maximum temperature required for clay shale to start turning into oil shale. Whereas when calcination continues until from the last decline to constant, ie, at 400°C , many molecules were present in the oil shale off, so that there was a part of the shale in the pores that was released as well. This condition was referred to as over mature, where the graph line has already shown a horizontal straight tendency with increasing temperatures up to 800°C , indicating that the material has been damaged and can not be used as a reference to other shale materials. Physically it can also be seen that the material has been calcined at temperatures above 600°C the color becomes blackish. Thus the temperature required to process the reaction of the shale material to crude oil requires an ambient temperature between $\pm 300^\circ\text{C}$, lower than that of OD1-Ast1 ie testing on clay shale with composition of 50% clay mixture and 50% salicylic acid, and OD1-Ast2 with a mixture composition of 33% clay and salicylic acid 67%.

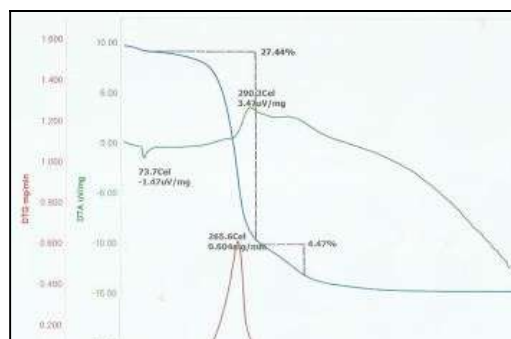


Figure 14. Graph of Thermogravimetry Analysis (TGA) of clay shale (OD1-Ast3)

TGA Test Result of Clay Material Added by Fe

The TGA test was performed on clay material (OD1-Ast2) added Fe (25%) to determine the temperature when cracking the material thermally on the material when heated at high temperatures (over 400 ° C), as it can provide an overview the process of changing the mass of a material. The test results with TGA are shown in Figure 15.

The clay material (OD1-Ast2) modified with the addition of metal material (Fe) was aimed at increasing the surface area and pore diameter, so it was expected to accelerate the reaction (the required temperature was smaller and also the time was faster). From the TGA test results on the Fe-organic clay as in Figure 15, it was found that the percentage decrease in weight occurred at ± 140 ° C temperature, indicating the water molecule detached from the crystal structure on the organic clay-Fe. Then another drop occurs which is a perfect phase change occurring at a temperature of about 290°C.

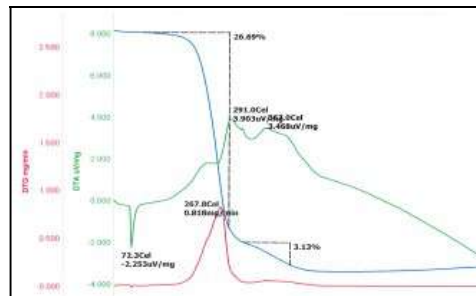


Figure 15. Graph of Thermogravimetry Analysis (TGA) for clay material (OD1-Ast2) added by Fe (25%)

The first weight change was the loss of water molecules contained in the crystal structure. While significant second-weight changes were indicated structural changes in the Fe-Clay organic material and the loss of water molecules chemically. Then calcination was done at 410°C, so many of the molecules in the kaolinite-stearic acid were released, so that part of the pillar was released as well. Based on the temperature data from the TGA test apparatus, it can be seen that the heating resistance at high temperatures possessed by clay shale-Fe was less than 410°C. If the calcination was done back to a temperature above 410°C, then many molecules in the OD1-Ast2-Fe material were released, so that it will affect the pore size change, and the result was gas.

Oil Shale Material Heating Duration

The heating process starts from the beginning until the remaining substances that have been damaged, it turns out for two variations of mixture and addition of Fe metals require a diverse time. Figure 16 shows a graph of decreasing the mass of clay-organic samples over time. OD1-Ast3, OD1-Ast2-Fe and CEC clearly show that the three materials undergo a faster heating process than others.

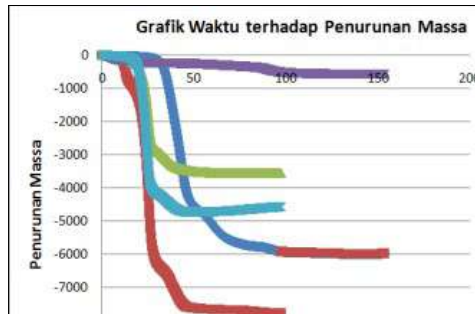


Figure 16. Graph of decline in time to reaction time on each clay-organic material and the addition of Fe.

CONCLUSION

From the results of this study, it can be concluded TOC (Total Organic Carbon) Test Result OD2-Ast1 (Clay 50% + Organic 50%) = 19.94%, OD2-Ast2 (Clay 33% + Organic 67%) = 34.38%, OD2-Ast3 (Clay 67% + Organic 33%) = 11.98%.

The clay catalyst product may serve as a catalyst for accelerating organic maturation reactions. When compared with the clay material OD1-Ast1 (50% clay-50% organic), OD1-Ast2 (33% clay-67% organic), the OD1-Ast3 shale material (67% clay - 33% organic) has a reaction rate which is faster.

Comparison of clay material is smaller than organic, hence the catalyst properties to accelerate the reaction become decreased, such as OD1-Ast2 shale material has a slow reaction speed compared to OD1-Ast3 shale material, so that in the organic maturation OD1-Ast2 material requires reaction process as much three stages (long reaction).

The addition of Fe metal into the clay catalyst product on the OD1-Ast2 shale material, the OD1-Ast2-Fe shale material (75% OD1-Ast2 and 25% Fe) has a faster reaction rate than before the Fe added.

CEC 2 (close to oil shale) in the heating process with clay catalyst and clay + Fe products requires a small reaction zone, because the material contains a lot of SiO₂ and Al which acts as a catalyst, in addition supported also by the condition of organic materials that have begun mature.

ACKNOWLEDGEMENT

The researcher would like to thank to (1) Dikti who has provided research funding assistance,

1. LPPM of Lampung University which has provided research opportunities and support.
2. Physics and Chemistry Laboratory at University of Indonesia and University of Lampung, which has provided measurement and testing opportunities so that this research can be completed.


REFERENCES

1. Barkia, H., Belkbir, L. and Jayaweera, S.A.A. 2004. Thermal analysis studies of oil shale residual carbon. *Journal of Thermal Analysis and Calorimetry*. 76 (2), pp.615-622.
2. Al-Hamaiedh, H., Maaitah, O., and Mahadin, S. 2010. Using Oil Shale Ash in Concrete Binder. *EJGE* Vol. 15, Bund. F. P. 601-608.
3. Kantsler, A.J., Cook, A.C., and Smith, G.C. 1978. Rank variation, calculated paleotemperatures in understanding oil, gas occurrence. *Oil and Gas Journal*. No. 20, p.196-205.
4. Berraja, T., Barkia, H., Belkbir, L., and Jayaweera, S.A.A. 1988. Thermal analysis studies of the combustion of Tarfaya oil shale. *Proceeding of an International Conference on Carbon, Carbon'88*, Eds. B. McEnaney and T.J. Mays, Univ. Newcastle Upon Tyne, UK, 18-23.
5. Bartis, James T.; LaTourrette, Tom; Dixon, Lloyd; Peterson, D.J.; Cecchine, and Gary. 2005. (PDF). *Oil Shale Development in the United States. Prospects and Policy Issues. Prepared for the National Energy Technology Laboratory of the U.S. Department of Energy*.
6. Burnham, Alan K.; McConaghy, and James R. 2006. "Comparison of the Acceptability of Various Oil Shale Processes" (<https://e-reports-ext.llnl.gov/pdf/341283.pdf>) (PDF). 26th Oil Shale Symposium. Golden, Colorado: Lawrence Livermore National Laboratory. UCRL-CONF-226717. Retrieved 2007-06-23.
7. Youngquist and Walter. 1998. "Shale Oil-The Elusive Energy" (http://hubbert.mines.edu/news/Youngquist_98-4.pdf) (PDF). *Hubbert Center Newsletter* (Colorado School of Mines) (4). Retrieved 2008-04-1
8. Koel and Mihkel. 1999. "Estonian oil shale" (<http://www.kirj.ee/public/oilshale/Est-OS.htm>). *Oil Shale. A Scientific-Technical Journal* (Estonian Academy Publishers) (Extra). ISSN 0208-189X. Retrieved 2007-07-21.
9. Subono, S. and Siswoyo. 1995. *Thermal Studies of Indonesian Oil Basin. CCOP Technical Bulletin*. March, Vol. 25, pp. 37 to 54.
10. Nagendrapa, G. 2002. *Organic Synthesis using Clay Catalyst*. J. Resonance. p: 64-77.
11. Xiufeng Xu, Yanfei Pan, Xiaoyan Cui, and Zhanghuai Suo. 2004. Catalytic Combustion of Methane Over Ti-Pillared Clay Supported Copper Catalysts. *Journal of Natural Gas Chemistry*. Vol. 13 No.4.
12. Catrinescu, C., Teodosiu, C., Macoveanu, M., Brendle, J.M., and Le Dred, R. 2002. Iron Containing Pillared Bentonites as Heterogeneous Fenton-Type Catalysts for The Oxidation Of Phenol In Wastewaters. *Environmental Engineering and Management Journal*. "Gh. Asachi" Technical University of Iasi, Romania. Vol.1, No.4, 561-569.
13. Huan-Yan Xu, Xiu-Lan He, Ze Wu, Lian-Wei Shan, and Wei-Dong Zhang. 2009. Iron-loaded Natural Clay as Heterogeneous Catalyst for Fenton-like Discoloration of Dyeing Wastewater. *Bull. Korean Chem. Soc.*, Vol.30, No.10.
14. Eman A. and Emam. 2013. Clays as Catalysts in Petroleum Refining Industry. *ARPJ Journal of Science and Technology*. Vol.3, No.4, ISSN: 2225-7217. Department of Petroleum Refining Eng. and Petrochemicals, Faculty of Petroleum and Mining Eng., Suez University, Suez, Egypt.
15. Widjaya, R.R. 2012. Bentonit Pilarisasi Cr dan Zeolit HZSM-5 Sebagai Katalis Pada Proses Konversi Ethanol Menjadi Biogasolin. Tesis S2. Program Studi Ilmu Material Pascasarjana Fakultas Matematika Dan Ilmu Pengetahuan Alam. Universitas Indonesia.

16. Indrati T.Y., Hartati, P., and Murdani. 2000. Penentuan Energi Aktivasi Sinter Pelet (Th,U)O₂ Pada Tahap Pertumbuhan Butir. *Prosiding Penemuan dan Presentasi Ilmiah Penelitian Dasar Ilmu Pengetahuan dan Teknologi Nuklir*. P3TM-BATAN Yogyakarta. 25.
17. Cahyadi and Yulianto, S.N. 2011. Studi Perilaku Penyalaan Partikel Batubara Indonesia Menggunakan Thermogravimetric Analysis Dalam Kondisi O₂/n₂ dan O₂/CO₂. *Jurnal Ilmiah Teknologi Energi (JITE)*. Volume 1 Nomor 13 Agustus 2011, ISSN 1858 – 3466. Balai Besar Teknologi Energi-BPPT Jurnal Ilmiah Teknologi Energi.
18. Sato, K., Takizawa, S. and Mohri, T. 2010. Theoretical Calculation of Activation Free Energy for Self-Diffusion in Prototype Crystal. *Materials Transactions, The Japan Institute of Metals*. Vol. 51, No. 9 (2010) pp. 1521 to 1525.
19. Katarzyna Slopiecka, Pietro Bartocci, and Francesco Fantozzi. 2011. *Thermogravimetric analysis and Kinetic study of poplar wood pyrolysis*. Third International Conference on Applied Energy. Perugia, Italy. pages 1687-1698.
20. Himawanto, D.A., Indarto, Saptoadi, H. and Rohmat, T.A. 2013. Thermogravimetric Analysis of Single-Particle RDF Combustion. *Modern Applied Science*: Vol. 7, No. 11. Hal: 34. ISSN 1913-1844 E-ISSN 1913-1852.
21. Himawanto, D.A. 2011. Penentuan Energi Aktivasi Pembakaran Briket Char Sampah Kota dengan Menggunakan Metoda Thermogravimetry dan Iso Thermal Furnace. *Jurnal Teknik Mesin Rotasi*. Vol. 15, No. 3, hal: 35-42.
22. Riyanto, S. 2009. *Uji Kualitas Fisik Dan Uji Kinetika Pembakaran Briket Jerami Padi Dengan Dan Tanpa Bahan Pengikat*. Skripsi. Jurusan Teknik Mesin Fakultas Teknik Universitas Sebelas Maret Surakarta.
23. Yan Y.F., Zhang Z.E., Zhang L. and Zhang L. 2014. Influence of coal properties on the co-combustion characteristics of low-grade coal and city mud. *Global NEST Journal*. Vol. 16, No 2. pp 329-338. Printed in Greece. All rights reserved.
24. Sugondo. 2012. Kinetika Pertumbuhan Butir Paduan Zry-4 Sn Rendah. *Urania*. Vol. 18 No. 3. Hal: 120-181. ISSN 0852-4777.
25. Sukma, H.L. 2012. *Analisis Thermogravimetry Dan Pembuatan Briket Tandan Kosong Dengan Proses Pirolisis Lambat*. Tugas Akhir Konversi Energi. Fakultas Teknologi Industri. Institut Teknologi Sepuluh Nopember Surabaya.
26. Malika. A., Mohammed, A. and Boukhlifi, A. 2014. Kinetic And Energy Study Of Thermal Degradation Of Biomass Materials Under Oxidative Atmosphere Using TGA, DTA And DSC. *Journal of Multidisciplinary Engineering Science and Technology (JMEST)*. ISSN: 3159-0040 Vol. 1 Issue 5, December 2014.
27. Martono, Y., Sari, Y.E.P., and Hidarto, J. 2012. Penggunaan Model Arrhenius Untuk Pendugaan Masa Simpan Produk Minuman Kemasan Berdasarkan Kandungan Vit C. Paper. Program Studi Kimia, Fakultas Sains dan Matematika. Universitas Kristen Satya Wacana.
28. Suyitno. 2009. Perumusan Laju Reaksi dan Sifat-Sifat Pirolisis Lambat Sekam Padi Menggunakan Metode Analisis Termogravimetri. *Jurnal Teknik Mesin* Vol. 11, No. 1, 12-18. UNS, Surakarta.
29. Minarsih, T. 2011. Penentuan Energi Aktivasi Amlodipin Besilat Pada pH 1, 6 Dan 10 Dengan Metode Kromatografi Cair Kinerja Tinggi. *PHARMACY*. Vol.06 No.01 Agustus 2011. ISSN 1693-3591.
30. Dewanto, O., Bahri, S. and Atmojo, J.P. 2008. Analisis Perubahan Sifat-Sifat Fisika Batuan Organik terhadap Aliran Panas Bumi di Daerah 'X' Sumatera, untuk Menentukan Kandungan dan Daerah Oil Shale sebagai Sumber Energi Baru.

- Prosiding Pertemuan Ilmiah Tahunan, HAGI 33rd Annual Convention & Exhibition, Hyatt Regency Bandung. ISBN: 978-979-8126-05-5.*
31. Dewanto, O., Soegiyono, and B., Suharso. 2014. Comparison of Calcite (CaCO_3) and Clay (Illite/Kaolinite) Toward the Influence of Maturation and Organic Material Potential for Processing of Oil Shale Material. *International Journal of Basic & Applied Sciences IJBAS*. Vol:14, No: 05. October 2014.
 32. Dewanto, O., Mulyanto, B.S., Rustadi, and Wibowo, R.C. 2017. Determining the Temperature of Shale Material Conversion Into Crude Oil Based on Organic Clay and Organic Carbonate Test Outside Reservoir. *International Journal of Mechanical and Mechatronics Engineering IJMME-IJENS*. 173105-4848. Vol:17 No:05. P 84-89.

10. ADMINISTRATIVE FEE FOR PUBLISHING IN IJAP

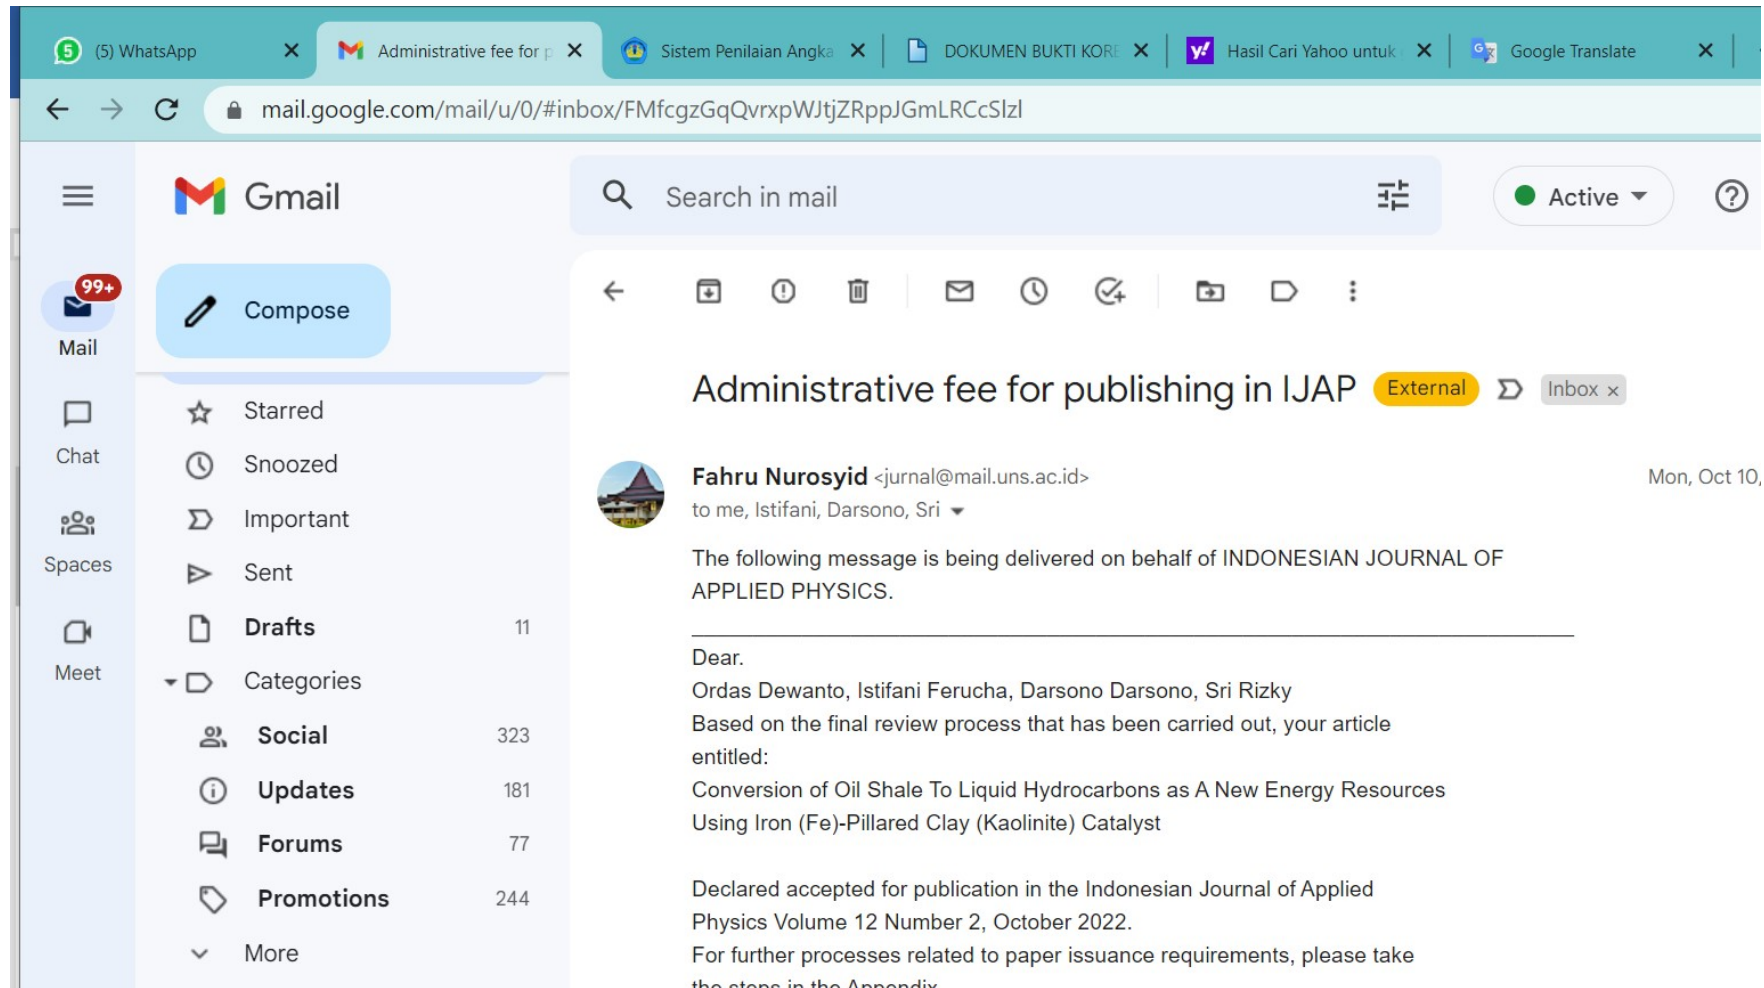

The screenshot shows a Gmail interface with a browser window. The browser tabs include WhatsApp, 'Administrative fee for p...', 'Sistem Penilaian Angka', 'DOKUMEN BUKTI KORE', 'Hasil Cari Yahoo untuk', and 'Google Translate'. The address bar shows the URL: mail.google.com/mail/u/0/#inbox/FMfcgZGqQvrxpWJtjZRppJGmLRCcSlzl.

The Gmail interface features a left sidebar with navigation options: Mail (99+), Chat, Spaces, and Meet. The main content area shows a search bar and a list of folders: Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), Promotions (244), and More.

The selected email is titled 'Administrative fee for publishing in IJAP' and is marked as 'External' and 'Inbox x'. It is from 'Fahru Nurosyid <jurnal@mail.uns.ac.id>' and is dated 'Mon, Oct 10, 2022'. The email content reads:

The following message is being delivered on behalf of INDONESIA JOURNAL OF APPLIED PHYSICS.

Dear,
Ordas Dewanto, Istifani Ferucha, Darsono Darsono, Sri Rizky
Based on the final review process that has been carried out, your article entitled:
Conversion of Oil Shale To Liquid Hydrocarbons as A New Energy Resources Using Iron (Fe)-Pillared Clay (Kaolinite) Catalyst

Declared accepted for publication in the Indonesian Journal of Applied Physics Volume 12 Number 2, October 2022.
For further processes related to paper issuance requirements, please take the steps in the Appendix

(5) WhatsApp x Administrative fee for p x Sistem Penilaian Angka x DOKUMEN BUKTI KOR x Hasil Cari Yahoo untuk x Google Translate x

mail.google.com/mail/u/0/#inbox/FMfcgzGqQvrpWJtjZRppJGmLRCcSlzl

Gmail Search in mail Active

99+ Compose

Mail

- Starred
- Snoozed
- Important
- Sent
- Drafts** 11
- Categories
- Social** 323
- Updates** 181
- Forums** 77
- Promotions** 244
- More

Surakarta, 10 October 2022
Chief Editor

Dr Fahru Nurosyid

Note:

For further processing related to paper issuance requirements, please perform the following steps:

The administrative fee for publishing the Indonesian Journal of Applied Physics is Rp. 500.000,- per paper.
Payment is made via:

Bank BNI
Account Number: 0421525511 On behalf of Kusumandari

Furthermore, proof of payment is sent via email: ijap@mipa.uns.ac.id
transfer confirmation via 08562814634 (Managing Editor LIAP)

Meet	Categories	
	Social	323
	Updates	181
	Forums	77
	Promotions	244
	More	

Physics is Rp. 500.000,- per paper.

Payment is made via:

Bank BNI

Account Number: 0421525511 On behalf of Kusumandari

Furthermore, proof of payment is sent via email: ijap@mipa.uns.ac.id transfer confirmation via 08562814634 (Managing Editor IJAP)

The paper will be published after the payment administration process is complete and after the final process/proofreading, which we will inform

11. FILE YANG SUDAH DIEDIT FINAL

p-ISSN 2089- 0133 e-ISSN 2477-6116 Indonesian Journal of Applied Physics (IJAP) Vol. 12 No. 21
url: <https://journal.uns.ac.id/ijap/article/view/58414> DOI: <https://doi.org/10.13007/ijap.2022.12.21.2101>

CONVERSION OF OIL SHALE TO LIQUID HYDROCARBONS AS A NEW ENERGY RESOURCES USING IRON (Fe)-PILLARED CI (KAOLINITE) CATALYST

Ordas Dewanto^{1*}, Istifani Ferucha², Darsono³ and Sri Rizky⁴

¹Geophysical Engineering, University of Lampung, Lampung, Indonesia

²Geophysical Engineering, Bandung Institute of Technology, Bandung, Indonesia

³Department of Physics, Faculty of Mathematics and Natural Sciences, Sebelas Maret University, Indonesia

⁴Petroleum Engineering, School of Minerals and Energy Resources Engineering, Austri

*corresponding author: ordas.dewanto@eng.unila.ac.id

Received 21-01-2022, Revised 04-10-2022, Accepted 05-10-2022
Available Online 11-10-2022, Published Regularly October 2022

ABSTRACT

In the context of new energy exploration, oil shale is currently a source of energy that is developed so that it can be used as an alternative energy in the future. Based on this background it is important to research the conversion method of oil shale to liquid hydrocarbons. The method used is using clay (kaolinite) catalyst and iron (Fe)-pillared clay (kaolinite) catalyst. Catalyst products are capable of making organic mature faster and even requiring a lower temperature for the changes (through thermal cracking of non-volatile organic material). Addition of Fe metal in the clay catalyst product to oil shale, causing the surface area of natural clays were significantly increased, then the volume of micro pore were also increase causes the organic material to mature faster and the temperature required for the change is than the shale material without Fe. The catalyst method by the pillardization technique can increase the surface area and pore volume, thus accelerating the reaction and changing reaction rate to be greater. It is observed that clay catalyst products can serve as catalyst accelerating organic maturation reactions, if compared between the clay material of OD1- (50% clay-50% organic), OD1-As2 (33% clay-67% organic), and the OD1-As3 shale mat (67% clay - 33% organic), then OD1-As3 has a faster reaction rate. Comparison of clay mat is smaller than organic, then the properties of the catalyst product to accelerate the reaction reduced, such as the OD1-As2 shale material has a slow reaction rate compared to the OD1-As3 shale material. The addition of Fe metal in the clay catalyst product to the OD1-As2 material, resulting in OD1-As2-Fe shale material (75% OD1-As2 and 25% Fe) having a faster reaction rate than before the addition of Fe metal. The design of heavy (h) clay (kaolinite) Fe pillardation on oil shale were greatly influence the change of TOC values when heated, affecting maturation and Tmax. The temperature of maturation and Tmax as the main parameters of conversion of oil shale to liquid hydrocarbon. This method supports the development science and technology in the field of exploitation and processing of natural resources.

12. BUKTI PEMBAYARAN

The screenshot shows a Gmail interface on a desktop browser. The browser's address bar displays the URL: `mail.google.com/mail/u/0/#search/ijap%40mipa.uns.ac.id/KtbxLzGLhtxdTGZpCIngDSfgxhHSBIHXFL`. The Gmail search bar contains the email address `ijap@mipa.uns.ac.id`. The left sidebar shows the navigation menu with categories: Mail (99+), Chat, Spaces, and Meet. The main inbox list includes: Compose, Inbox (1,600), Starred, Snoozed, Important, Sent, Drafts (11), Categories, Social (323), Updates (181), Forums (77), and Promotions (244). The selected email is titled "BUKTI PEMBAYARAN" and is from "ORDAS DEWANTO <ordas.dewanto@eng.unila.ac.id>" sent on Tuesday, October 1st. The email body contains the following text: "YTH. Managing Editor IJAP", "Berikut saya kirimkan bukti pembayaran untuk Biaya administrasi penerbitan Jurnal Terapan Indonesia Fisika", and "Terima kasih Dr. Ordas Dewanto". Below the text, there is one attachment labeled "One attachment • Scanned by Gmail" which is a scanned image of a receipt or invoice.

NO. TRX : 88116 660354 1007045 4
NO. RRS : 441325511 KUSUMANDARI 04 9022
JUMLAH : IDR 500.000,00 TRANSFER DAR
142 - TANJUNG KARANG

Formulir Pemindahbukuan

NO. TRX : 88116 660354 000054 4
NO. RRS : 111362153 Ibu DWI MUKTI ASRI
JUMLAH : IDR 500.000,00 - TRANSFER KE
142 - TANJUNG KARANG

Penetina
Nama : Kusumandari
Nomor Rekening : 0421525511
Nama Cabang : Bank B.XI1

Penerima
Nama : Dwi Mukti Asri
Nomor Rekening : 1115622153
Nama Cabang : BNI

Jumlah : Rp 500.000,-
Terbilang : Lima Ratus Ribu Rupiah

Keterangan

BIAYA ADMINISTRASI, JENJER BIAW
JUE XIAL TERPAKAI LADOKRESIA
CJUEXAL (DAR)
a.n. P. ORPAS DEWARTO WILIA
LAMPUNG

Pejabat Bank



Pembohon

17/10/2022 08:39
111362153 Ibu DWI MUKTI ASRI
500.000,00 - TRANSFER KE
142 - TANJUNG KARANG

13. BERTANYA ARTIKEL KAPAN PUBLISH KEPADA PANITIA



13. ARTIKEL YANG TELAH PUBLISH DI INDONESIAN JOURNAL OF APPLIED PHYSICS VOLUME 12 NUMBER 2, OCTOBER 2022



CONVERSION OF OIL SHALE TO LIQUID HYDROCARBONS AS A NEW ENERGY RESOURCES USING IRON (Fe)-PILLARED CLAY (KAOLINITE) CATALYST

Ordas Dewanto*¹, Istifani Ferucha², Darsono³ and Sri Rizky⁴

¹Geophysical Engineering, University of Lampung, Lampung, Indonesia

²Geophysical Engineering, Bandung Institute of Technology, Bandung, Indonesia

³Department of Physics, Faculty of Mathematics and Natural Sciences, Sebelas Maret University, Surakarta, Indonesia

⁴Petroleum Engineering, School of Minerals and Energy Resources Engineering, Australia

*corresponding author: ordas.dewanto@eng.unila.ac.id

Received 21-01-2022, Revised 04-10-2022, Accepted 05-10-2022

Available Online 11-10-2022, Published Regularly October 2022

ABSTRACT

In the context of new energy exploration, oil shale is currently a source of energy that is being developed so that it can be used as an alternative energy in the future. Based on this background, it is important to research the conversion method of oil shale to liquid hydrocarbons. The method used is using clay (kaolinite) catalyst and iron (Fe)-pillared clay (kaolinite) catalyst. Clay catalyst products are capable of making organic mature faster and even requiring a lower temperature for the changes (through thermal cracking of non-volatile organic material). The addition of Fe metal in the clay catalyst product to oil shale, causing the surface area of the natural clays were significantly increased, then the volume of micro pore were also increased, it causes the organic material to mature faster and the temperature required for the change is less than the shale material without Fe. The catalyst method by the pillarization technique able to increase the surface area and pore volume, thus accelerating the reaction and changing the reaction rate to be greater. It is observed that clay catalyst products can serve as catalysts for accelerating organic maturation reactions. if compared between the clay material of OD1-Ast1 (50% clay-50% organic), OD1-Ast2 (33% clay-67% organic), and the OD1-Ast3 shale material (67% clay - 33% organic), then OD1-Ast3 has a faster reaction rate. Comparison of clay material is smaller than organic, then the properties of the catalyst product to accelerate the reaction are reduced, such as the OD1-Ast2 shale material has a slow reaction rate compared to the OD1-Ast3 shale material. The addition of Fe metal in the clay catalyst product to the OD1-Ast2 shale material, resulting in OD1-Ast2-Fe shale material (75% OD1-Ast2 and 25% Fe) having a faster reaction rate than before the addition of Fe metal. The design of heavy (%) clay (kaolinite) and Fe pilaration on oil shale were greatly influence the change of TOC values when heated, then affecting maturation and Tmax. The temperature of maturation and Tmax as the main parameters of conversion of oil shale to liquid hydrocarbon. This method supports the development of science and technology in the field of exploitation and processing of natural resources.

Keywords: clay; iron (Fe)-pillared; maturation; oil shale; TOC; Tmax

INTRODUCTION

The consumption of fossil fuel is still increasing, but the oil reserves are decreasing. The serious problem faced by the Indonesian nation is the provision of energy for the next ten years, and it is predicted that oil and gas will remain an important source of primary energy,

particularly to meet the needs of the transportation and industrial sectors. According to Barkia et al^[1], energy supply has been a worldwide problem for the last few decades.

Many countries have sought to cope with rising oil prices and their effects on the economy. Mobilization of national energy resources becomes an important task for many countries for economic development and social progress. Al-Hamaiedh^[2] said that in Jordan high oil consumption and reduction of crude oil reserves are expected to increase the energy crisis, therefore the search for alternative energy exploration becomes so important. The cost of imported energy is a burden to the national economy and there are still some countries experiencing similar problems.

Currently, exploration of new and renewable energy sources is still a top priority in the exploration of energy sources. According to Kantsler and Cook^[3], oil shale contains a lot of immature organic material, when heated to a certain temperature, its organic content matures and changes physically and chemically, so as to produce new energy that is fluid hydrocarbon.

Berraja et al^[4] initiated research on thermal analysis study on oil shale burning in Tarfaya. Although the methods used are not efficient yet, but the results of the study produce a fairly sophisticated heating theory today, namely pyrolysis method.

Then Bartis et al^[5] conducted research by collecting oil shale, then stored in a place and burn directly to be used as a source of electrical energy. Bartis et al also did the mining of underground oil shale using space and pillar method. Burnham et al^[6] continued Bartis's research by extracting the results of oil shale processing, which is done on the ground (ex-situ processing), although there were several new technologies extracting the results of underground shale processing at the site or in-situ processing .

Research on conversion technology involving oil shale heating in the absence of oxygen to the temperature at which the material decomposes into gas, condensed oil, and solid residue. This usually occurs at temperatures between 450°C (842°F) and 500°C (932°F)^[7]. The decomposition process begins at a relatively low temperature (300°C/570°F), but faster and more complete results are obtained at higher temperatures^[8].

Subono and Siswoyo^[9] research on the nature of material undergoing physical, biological and chemical changes caused by heat, temperature and physical changes, based on the development of thermal technology in order to meet those needs, a new indicator is made to know the level maturity of organic materials, using thermal methods associated with geochemical technology and petrophysical parameters. The data can show the level of maturation of organic materials such as TAI, TTI, Ro, and so on.

Nagendrappa's^[10] study of all clay minerals can catalyze various organic reactions occurring on the surface and interstitial spaces. The use of catalysts in industrial petroleum in recent years has undergone tremendous expansion, the most important of these catalysts used in the cracking process, as a consequence of the growth of catalytic cracking, became a major industry.

Xiufeng Xu et al^[11] conducted a study by adding Ti into the organic clay, thus functioning as a catalyst of Clay-Organic. The results lead to high catalytic performance for methane combustion under reaction temperature 400°C-550°C. Catrinescu et al^[12] presented a catalytic performance evaluation of Fe and Al based clay using powder method. Both pillared clays are very active in phenol removal, allowing the total elimination of phenol. Then Huan-Yan Xu et al^[13] conducted a study of a clay catalyst based Fe-bearing that was

successfully prepared and used as a heterogeneous catalyst in the Fenton system as for the acid-color change in fuchsine wastewater.

Eman and Emam^[14] conducted a study of clay catalysts that have attracted much interest in catalytic applications in the petroleum industry. Clay is widely used for various processes such as catalytic cracking, hydrocracking, reformation, isomerization, hydrogenation, alkylation. The most important clays used in the manufacture of catalysts are kaolinite and monmorillonite. There are still many experts used various methods who successfully use clay as a catalyst in relation to organic,

Widjaya^[15] undertook research on the development of another type of acid catalyst derived from polarized clay (bentonite) and a catalyst with two oxides (bi-oxide) in this study. Clay is used as a catalyst feedstock because it is widely available in Indonesia, and can be adjusted to a certain degree of acidity and pore size through a method of pillarization. The process of conversion of ethanol into biogasolin requires a catalyst with a sufficiently high acidity level and ranges between 2 mmol / g to 5 mmol / g. Polarized bentonite with Cr has a high acidity level of 4.09 mmol / g, whereas HZSM-5 is a commercial zeolite having 2.62 mmol / g.

Indrati et al^[16] conducted a study on the determination of pellet activation energy (Th, U) Oz at the grain growth stage using dilatometer and Scanning Electrone Microscope (SEM). The method is calculated by a method based on the pellet shrinkage curve. Cahyadi et al^[17] conducted a study on the behavior of ignition of Indonesian coal particles using Thermogravimetric Analysis under O₂ / N₂ and O₂ / CO₂ conditions. Sato et al^[18] conducted research on free energy activation that has dependence on temperature. Temperature dependence was found to be greater for calculations. The determination of activation energy, the pre-exponential factor and the reaction rate of TGA analysis refers to some of the previous research findings, such as: Katarzyna et al^[19], Himawanto^[20], Himawanto et al^[21], Riyanto^[22], Eman A. Emam^[14], Yan and Zhang^[23], Sugondo^[24], Sukma^[25], Malika et al^[26], Martono dkk^[27], Suyitno^[28], Minarsih^[29].

The amount of shale material in Indonesia is very much, so it is expected that in the next few years there will be many sources of oil and gas available. If we wait for the process of shale material into oil and gas, it will take a long time. Therefore, it is necessary to continue research of Dewanto et al^[30-33] about the process of conversion of shale material into oil and gas done in the laboratory.

In response, researchers are trying to develop new energy sources and renewable energy sources, one of which is the use of oil shale as fuel. One alternative of direct utilization of oil shale is to convert oil shale into oil and hydrocarbon gas catalytically. The use of this catalytic process is very promising because all organic material in oil shale is expected to convert all into oil and hydrocarbon gas in quick time with small Tmax value, therefore it is necessary to select suitable catalyst for the catalytic process of oil shale into hydrocarbon oil. The material used for the catalyst is clay and Fe metal. The design of heavy clay (kaolinite/illite) and Fe pilaration on oil shale greatly influenced the change of TOC values when heated thus affecting maturation and Tmax. This temperature (Tmax) as conversion parameter of oil shale to hydrocarbon oil.

In addition to Pyrolysis (TOC determination), other tests performed are SEM, XRD and TGA. The clay catalyst product can serve as a catalyst for accelerating organic maturation reactions. Clay material smaller than organic, the nature of the catalyst to accelerate the reaction becomes reduced. The level of organic maturation requires a long reaction process of three steps of reaction. Vice versa. The clay metal polarized clay catalyst product to the

oil shale causes the heating process in oil shale material to have a faster reaction rate than before the Fe is added. Clay catalyst products were capable of making organic mature faster, even requiring a lower temperature for the changes (through thermal cracking of non-volatile organic material). In addition to Pyrolysis (TOC determination), other tests performed are SEM, XRD and TGA. The clay catalyst product can serve as a catalyst for accelerating organic maturation reactions. Clay material smaller than organic, the nature of the catalyst to accelerate the reaction becomes reduced. The level of organic maturation requires a long reaction process of three steps of reaction. Vice versa. The clay metal polarized clay catalyst product to the oil shale causes the heating process in oil shale material to have a faster reaction rate than before the Fe is added. Clay catalyst products are capable of making organic mature faster and even the temperature required for change (through thermal cracking of non-volatile organic material) is smaller. Clay (kaolinite) is able to decrease the activation energy (E_a) of a reaction, so it is more easily exceeded by reactant molecules consequently the reaction becomes faster. The catalyst method by the pillarization technique able to increase the surface area and pore volume, thus accelerating the reaction and changing the reaction rate to be greater.

METHOD

Research Tools

The equipment used were glassware for preparation and rock cutting equipment, X-ray Diffraction (XRD) for the distribution of oxides, TGA, SEM to determine the concentration of species/oxide characteristics, Pyrolysis, FTIR.

Main Research Materials

In this research, the materials used were oil shale ($\text{TOC} \geq 12\%$) and natural clay (kaolinite/illite) obtained from the coring at a certain depth in the area of X Sumatra. Figure 1 shows coring on facies type A, B and C.

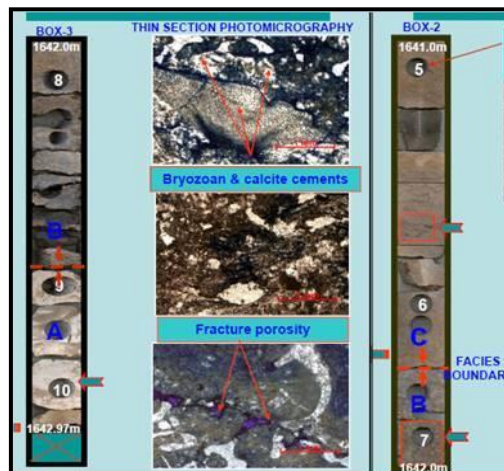


Figure 1. Type of material extracted from the Core on Facies A, B and C.

Determination of Oil Shale Material

The stage of material determination was the most important stage in material selection. Selecting the material from the drilling coring results, then grouped, namely the calcite type oil shale (CaCO_3) and the kaolinite or illite oil shale group.

Characterization of Oil Shale Materials

The tools used for oil shale characterization are SEM and XRD, to determine the identity of the material. SEM for information about the state of the material, eg the type of elements present, and the distribution, topography or surface shape. XRD techniques can also model the type of compound, the percentage of the compound and its crystallographic characteristics.

TGA Test on Clay-Organic Materials

Thermogravimetry is a technique for measuring the weight change of a compound as a function of temperature or time. The result is a continuous diagram recording; schematic one-stage decomposition reactions. The two main types of thermal analysis techniques are thogogravimetric analyzers (TGAs), which automatically record changes in sample weight as a function of temperature and time, and thermal differential analysis (DTA) that measures temperature differences, T, between samples with inverted referent material as function temperature.

Pyrolysis Testing

Pyrolysis analysis was used to identify the type and maturity of shale materials as well as to detect the hydrocarbon content in shale material. The sample selected for Pyrolysis analysis is the previously destroyed sample then dried. The Pyrolysis Method consists of a temperature heater (oven) at an inert atmospheric temperature (helium) and a sample of 100 mg to determine:

- a. Free hydrocarbons in the sample (clay-shale, carbonate-shale and oil shale).
- b. Hydrocarbon and oxygen compounds that evaporate from the cracking process of organic material material in the sample (clay-shale, carbonate-shale and oil shale).

Maximum Temperature (Tmax)

Tmax is the maximum temperature to release hydrocarbons from the cracking process of material mixtures that occur during pyrolysis (peak S2). The recorded Tmax value is influenced by several types of material mixtures mentioned above. Thermal maturity level was measured from Tmax. For example: If the value of Tmax < 435°C shows the clay-shale, the above-mentioned carbonate-shale and oil shale were still immature. If the Tmax value between 435-470°C indicates in the condition of thermal maturity. Whereas if Tmax > 470°C indicates over mature. The pyrolysis graphic is called a pirogram.

Material Testing of Oil Shale To Liquid Hydrocarbons Conversion

To know the reaction of oil shale to liquid hydrocarbon conversion, we used some analysis and testing data on oil shale material (clay and carbonate). Tmax value were one of the chemical parameters used to determine the maturity level of oil shale. The process was part of the pyrolysis test which is the initial test of shale material in the conversion reaction. Pyrolysis analysis was also used to identify the type and maturity of shale materials as well as to detect the hydrocarbon content in shale material. Tmax is the maximum temperature for removing hydrocarbons from the cracking process of material mixtures occurring during pyrolysis (peak S2), then the oil shale has become a testable oil with a heating according to the analysis, then conducted simple combustion.

RESULTS AND DISCUSSION

Result of Material Determination

Determination of Oil Shale Material

The stage of material determination was the most important stage in material selection. Starting from coring on each known material, then grouped according to requirement. Materials needed were clay material kaolinite or illite type.



Figure 2. Clay material that has been formed into pellets.

The clay material that has been formed into a pellet with variations in diameter size is shown in Figure 2, where the material was dry. Some clay materials used were materials with sample numbers OD1 and OD2.

Determination of Organic Materials

The selected organic material were organic material of cyclic group of compounds: naphthalene and salicylic acid and aliphatic organic compounds in the form of: stearic acid and lauric acid. Organic materials used were materials with Ast sample numbers (Stearic Acid) and Asl (Salicylic Acid). Used the organic material because it corresponds to the content present in oil shale. The amount of organic content of rocks or shale materials is usually expressed at the price of TOC (Total Organic Carbon).

Clay-Organic Material Sampling

The results of pyrolysis testing showed that organic clay (OD1-Ast, OD2-Ast) were successfully prepared as samples such as shale material, since they have the same main characteristics, as shown in Table 1.

Table 1. The results of pyrolysis testing on clay-organic synthesis and organic-carbonate synthesis.

Shale Materials (Kerogen Type II)	Clay-Organic (Synthesis)
<ul style="list-style-type: none"> • Shale or clay • Organic materials • TOC > 12,0% 	<ul style="list-style-type: none"> • Clay (kaolinite/illite) • Stearic acid • TOC ≥ 12,0%

Figure 3 shows the description of the type of material up to the processing in the laboratory, starting from the coring process, material selection, clay-organic material sampling, up to the tests. The results of pyrolysis testing on clay-organic synthesis indicate that the synthesis of the material was very good as shale material.

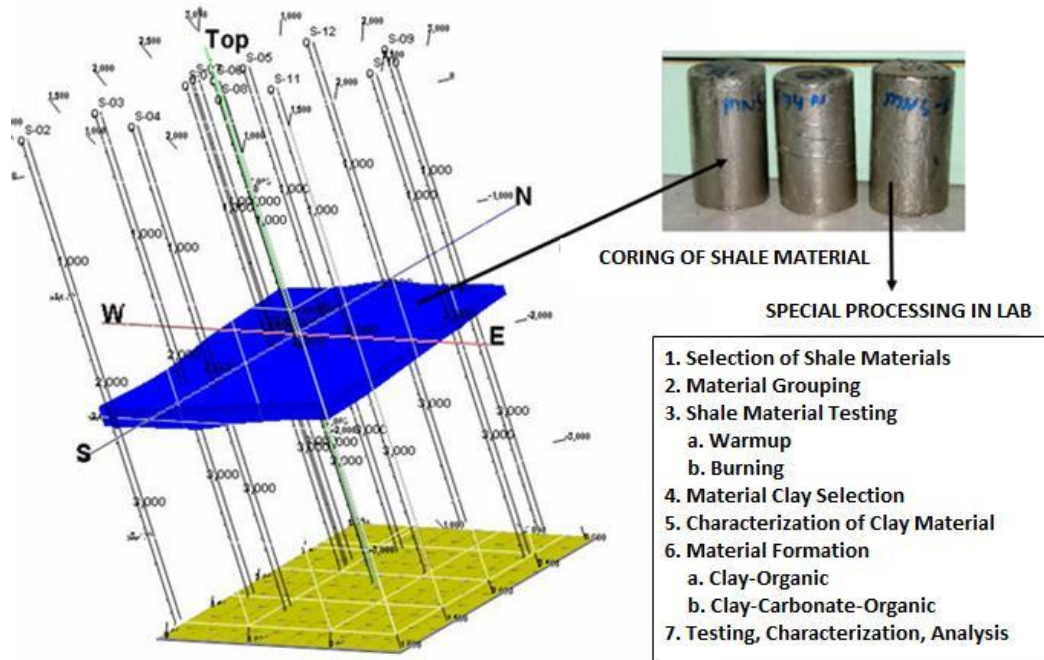


Figure 3. The coring process, starting from the determination of the type of material to the processing in the lab.

TOC (Total Organic Carbon) Test Results

TOC testing was successfully performed on clay-organic material samples (OD2-Ast). TOC test results on the shale material samples are shown in Table 3.2. This TOC values were used as one of the parameters for the initial selection stage of the material selection to be used as shale material.

Table 2. TOC (Total Organic Carbon) Test Results

Sample Name	TOC (%)
OD2-Ast1 (Clay 50% + Organic 50%)	19.94
OD2-Ast2 (Clay 33% + Organic 67%)	34.38
OD2-Ast3 (Clay 67% + Organic 33%)	11.98

Shale material can be separated between shale materials that were good or not good to serve as the basis for further processing on shale materials. Two clay-organic materials have shown excellent quality, which has TOC value of 12.0%, while an organic clay material (OD2-Ast3) shows good quality, although TOC value was only close to 12.0%, but can still be used as shale material to be tested.

Results of Analysis Using SEM

The selected shale material was characterized using SEM. The purpose was to know the morphology, particle size, material content, pores of the material and the elements contained.

SEM Analysis of Clay Material

Figure 4 shows the Edax-SEM result of clay material OD2 and Figure 5 is the result of a SEM image of clay material OD1, visible cubby shapes covered in white like snow. Such

conditions indicate that the clay has the dominant kaolinite type. Seen in Figure 4 and 5 that the main constituent minerals are clay minerals.


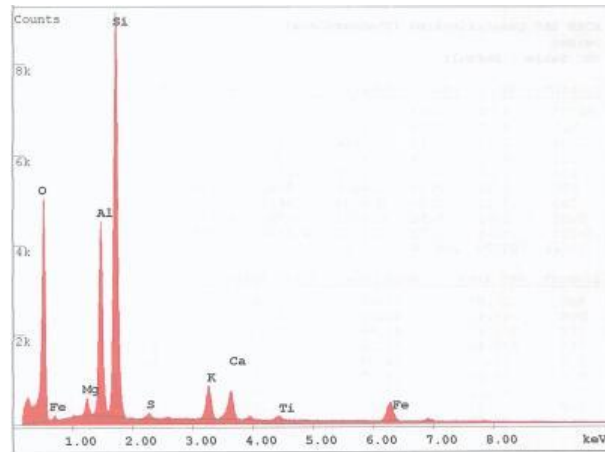


Figure 4. SEM results of clay material OD2.

In more detail the constituent is dominated by alloys of illit and kaolinite clay, which show the texture of crenulation and hairy. Also present oil traces or oil droplets/bitumen. It also appears that the shale have undergone a diagenetic process characterized by the presence of autogenic clay minerals that form alloys of clay sheets. From the results of Edax, OD1 and OD2 materials have a very large content of Al, Si and O (dominant).

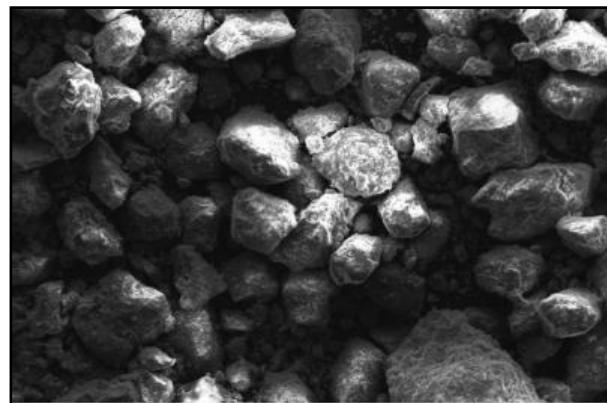

Element	Wt %	Mol %	K-Ratio	Z	A	F
Na2O	1.91	2.02	0.0058	0.9618	0.4244	1.0049
MgO	4.91	7.99	0.0168	0.9859	0.5702	1.0088
Al2O3	18.92	12.18	0.0661	0.9570	0.6816	1.0116
SiO2	67.03	73.21	0.2169	0.9849	0.7026	1.0005
SO3	1.08	0.89	0.0029	0.9692	0.6888	1.0009
K2O	1.84	1.28	0.0127	0.9338	0.8899	1.0015
CaO	0.56	0.65	0.0035	0.9560	0.9199	1.0016
TiO2	0.57	0.47	0.0029	0.8730	0.9654	1.0030
Fe2O3	3.18	1.31	0.0193	0.8682	0.9995	1.0000
Total	100.00	100.00				

Figure 5. SEM image results of clay material OD1.

From the result of analysis by using SEM, it was known that clay morphology was kaolinite type (OD2 and OD1). Both images show a similarity that has a morphology with a large particle size and wider space, it indicates that the specific surface area was larger, so the volume of micro part was also larger. Since the nature of this clay can not expand upon contact with water, it was substantially expanded by expanding the surface area and cavities.

SEM Analysis of Organic Materials

Figure 6 shows the results of SEM and Edax image of stearic acid organic material ($C_{17}H_{35}COOH$), which is a moderately large number of chelated aliphatic (over C_{25}) compounds and most of the naphthene (cyclic chain). While the organic material salicylic acid ($C_7H_6O_2$) is shown in Figure 7.

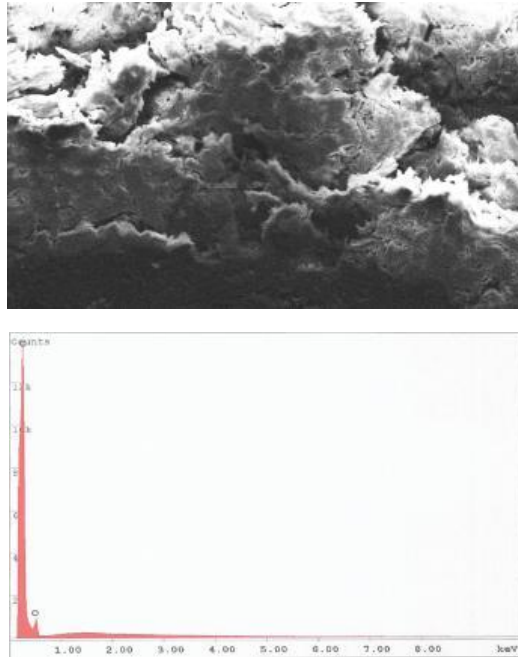


Figure 6. SEM photo results of organic material Stearic Acid (Ast).

From the Edax results, the organic material has a very large C and O content (dominant). Both organic materials were included in Kerogen type II which can be formed from several different sources of marine algae, pollen and spores, plant wax layers, fossil resins, and otherwise can also come from plant fat. This occurs as a result of the mixing of an autochthon organic material in the form of phytoplankton (and possibly also zooplankton and bacteria) together with allochthon material dominated by materials from plants such as pollen and spores.

This mixing shows a combination of characteristics between type I and type III kerogen. In this type of material was also often found large amounts of sulfur in cyclic chain and possibly also in sulphide bonds. The result of the SEM photo looks like a white blob that binds to each other. In this type of material was also often found large amounts of sulfur in cyclic chain and possibly also in sulphide bonds.

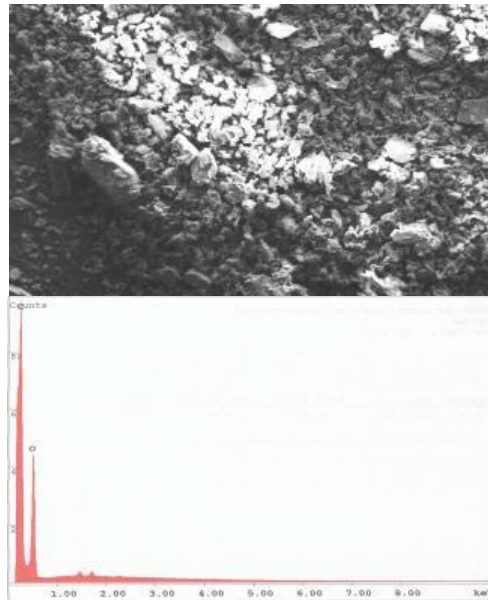


Figure 7. SEM photo results of organic material Salicylic acid (Asl).

SEM Analysis of Shale Material

After obtaining the appropriate organic container, the material was made of clay-organic OD1-Ast2, OD2-Ast2 (with 33% kaolinite mixture composition and 67% stearate acid on both sizes of the powder). Then the mixture was stirred and pressed slowly, then stored for 48 hours and stirred again and pressed again slowly, aiming for the organic material to fill evenly across the pores of the clay container material. Furthermore, the shale material was kept for at least 48 hours, the goal was for organic materials trapped (fill) pores and more binding and compact. The pores of shale material that has been filled organic become smaller, it can be indicated clay container was successfully filled / bound by organic, because it becomes smaller pores.

The pores were narrowed due to the organic matter and the pores were also covered by kaolinite evenly, in the picture the organic material is clearly identified, can be seen from the results of SEM analysis in Figure 8 and 9. The most important characteristic was that the shale material that has been made has a TOC value of $\geq 12\%$, which indicates the properties of a good oil shale according to the reference. With the synthesis method as mentioned above, the results obtained in Figures 8 and 9.

Clay-shale that have formed have small pores, not even seen at all, because all the pores were filled with organic material and accumulate and strongly bonded with kaolinite or some other small material percentage. The material that covered the pores that were filled with organic material, is evident in Figures 8 and 9. White color like the sky shows clay that binds strongly with organic material, so the shape of the clay shale becomes like a clump of white cloud, which covers all the pores evenly. This condition was expected, because the clay-shale was successfully represent the oil shale to be tested for the basis of processing oil shale into crude oil (STM).

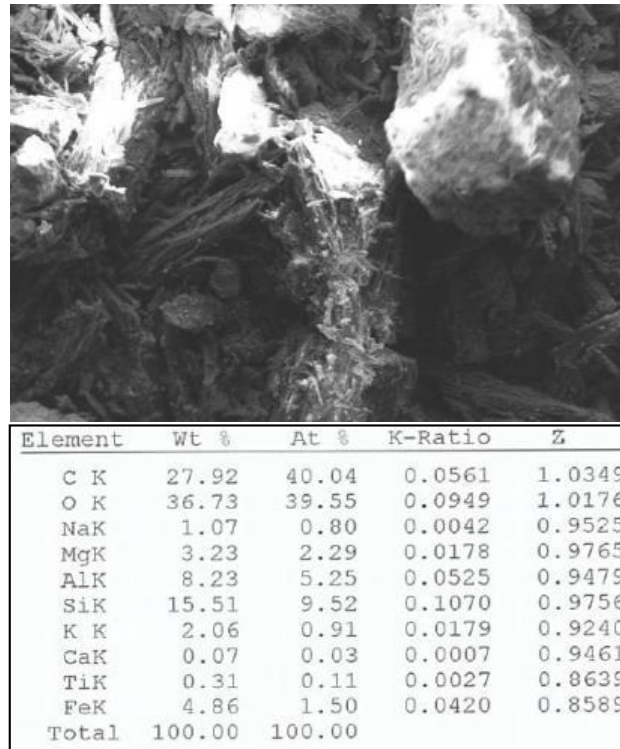


Figure 8. SEM image results of OD1-Ast2 material

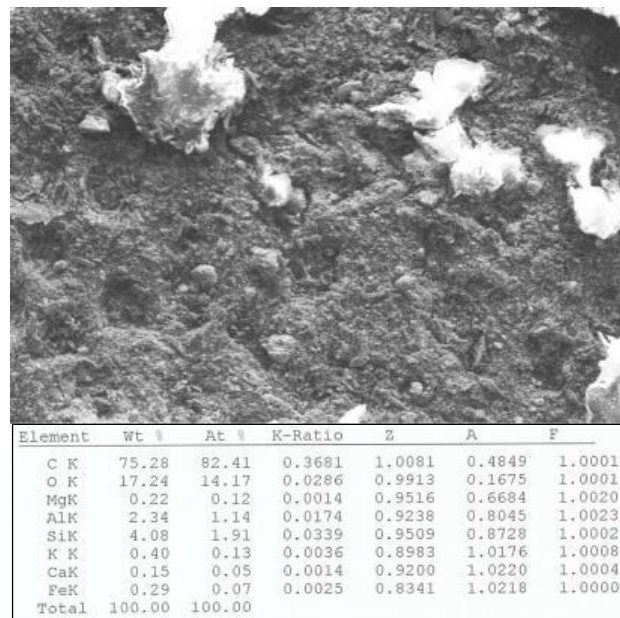


Figure 9. SEM image results of OD2-Ast2 material.

The results of Edax SEM of clay-shale OD2-Ast2 contain several elements with (wt,%) as follows: Carbon (75.28%), Oxygen (17.24%), Magnesium (0.22%), Aluminum (2.34%), Silicon (4.08%), Potassium (0.40%), Calcium (0.15) and Iron (0.29%). The results of Edax SEM of clay-shale OD1-Ast2 contain several elements with (wt,%) as follows: Carbon (27.92%), Oxygen (36.73%), Sodium (1.07%), Magnesium (3.23%), Aluminum (8.23%), Silicon (15.51%), Potassium (2.06%), Calcium (0.07), Ti (0.31%) and Iron (4.86%).

Then made the same clay material, ie clay-shale OD2-Ast1 (with 50% kaolinite mixture composition and 50% stearate acid on both sizes of the powder), OD1-Ast3 (with a mixture of 67% kaolinite and stearic acid 33% on both sizes of the powder). The result of the SEM image was not much different from OD1-Ast2 and OD2-ast2, the difference was only on its Edax result, ie content (wt%) in C, O and Si.

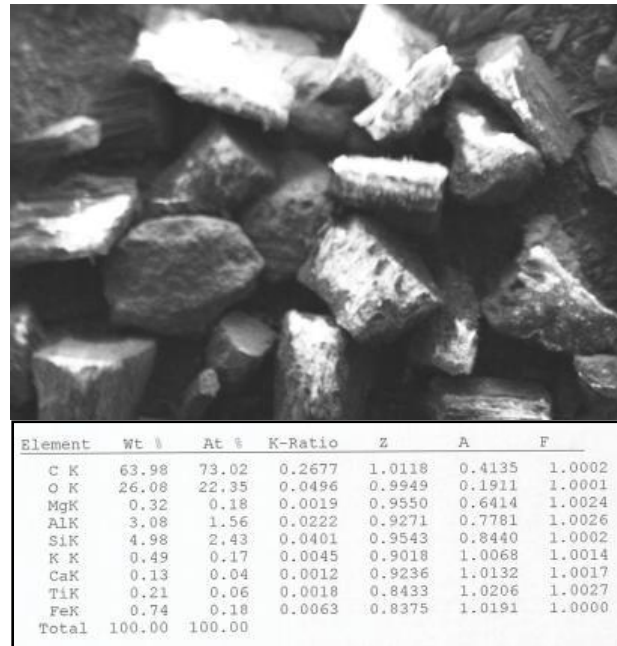


Figure 10. SEM image results of clay shale-Fe OD2-Ast2.

Then analyze clay shale-Fe with SEM and Edax images. From the overall results of SEM analysis on clay shale obtained SEM-Edax image results from clay-organic (clay shale) and clay shale-Fe. Both images when observed will show the difference that clay shale (see OD2-Ast2) have denser morphologies and smaller particle sizes than clay shale-Fe. clay shale-Fe have large particle sizes and their sockets were also wider, indicating that they were homogeneous and there has been a pillarization of the Fe metal, so that the specific surface area was larger, so the micro volume of the chamber was also larger. The Edax results was not differ greatly for the two materials, the only difference was in the material which arises from the Fe element more artificially, and the addition of Fe makes the surface area and pore volume larger, so it was expected to accelerate the reaction of organic changes. Comparison of SEM and Edax results of clay shale and clay shale-Fe can be seen in Figures 8, 9 and 10.

X-ray Diffraction (XRD) Measurement

The characterization of x-ray diffraction in clay-organic material aims to determine the distance of basal space (d001) of natural kaolinite and clay which has been mixed with organic material (stearic acid and salicylic acid). With the same purpose the characterization of x-ray diffraction is also done on the organic-calcite material.

Figure 11 shows graphs of XRD results of shale materials (clay-organic) OD1-Ast1, OD1-Ast2, OD1-Ast3 and OD1-Ast3-Fe. XDD test results on OD1-Ast1 shale material when viewed with HSP (High Score Plus) software for the OD1-Ast1 shale material, obtained the 2 highest peaks at different 2-theta angles.

From Figure 11 it can be seen that in the sample material (clay-organic) OD1-Ast1 has 2 peak at position 2θ 21.64700 and 26.69480 with the intensity value captured by X-ray

detector was 45724.46 cts and 14014.17 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

Then for samples of shale material (clay-organic) OD1-Ast2 also has 2 peak at 2θ position 21.64070 and 26.68940 with intensity value caught by X-ray detector were 63968.05 cts and 8967.09 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

Then for samples of shale material (clay-organic) OD1-Ast2 also has 2 peak at 2θ position 21.64070 and 26.68940 with intensity value caught by X-ray detector were 63968.05 cts and 8967.09 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

The shale material (clay-organic) OD1-Ast3 also has the 2 highest peaks (peak) at 2θ positions 21,58890 and 26.62960 with intensity values captured by X-ray detectors respectively 25422.63 cts and 19293.06 cts. It can be concluded that the peak formed was the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

The results of the last XRD characterization were performed on the shale material added with Fe. From Figure 11 it can be seen that in the sample material of clay (organic clay) OD1-Ast3-Fe also has two peak at the same angle position with OD1-Ast1, OD1-Ast2, and OD1-Ast3 at angles 21.61500 and 26.66650 with intensity values captured by X-ray detectors were 6800.48 cts and 1059.31 cts respectively. The peak formed was also the peak of the SiO₂ (Tridymite low) crystals and can be known to the crystal plane or the Miller hkl indices (40-4). While at the 2nd peak was the peak of the crystals SiO₂ (Quartz low) with the orientation hkl (011).

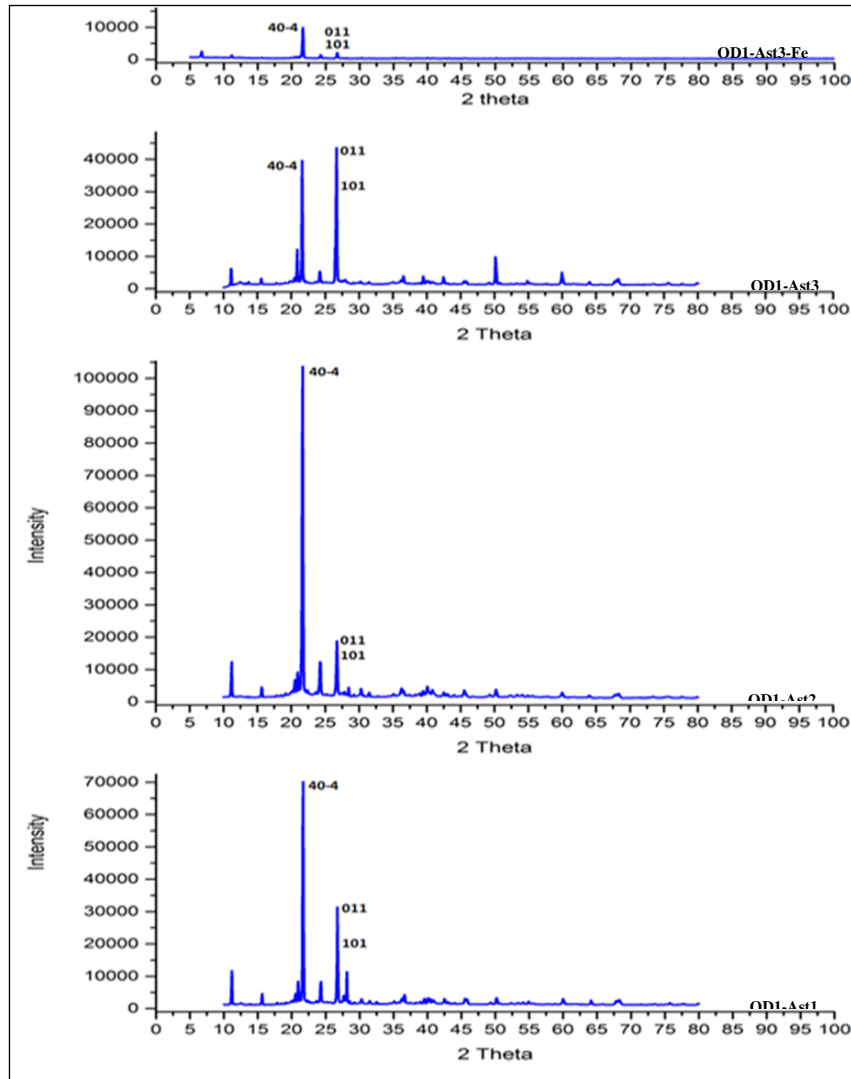


Figure 11. Result of XRD characterization of shale material (clay-organic) and +Fe.

The Result of Thermogravimetry Analysis (TGA)

Thermal analysis can be defined as measuring the physical and chemical properties of the material as a function of temperature. The two main types of thermal analysis techniques are thermogravimetric analyzers (TGAs), which automatically record changes in sample weight as a function of temperature and time, and thermal differential analysis (DTA) that measures temperature differences, T , between samples with inverted referent material as function of temperature.

The Result of TGA Test of Clay-Organic Materials (Kaolinite and C18H36O2)

Further testing with TGA was done on OD1-Ast2 material ie testing on clay shale with mixed clay 33% composition and 67% stearic acid on both sizes of the powder. Testing of this mixture to determine the damage to the structure on the material when heated at high temperatures (more than 400°C), because it can provide an overview of the process of mass changes in a material. From the results of testing with TGA, obtained graphs in Figure 12.

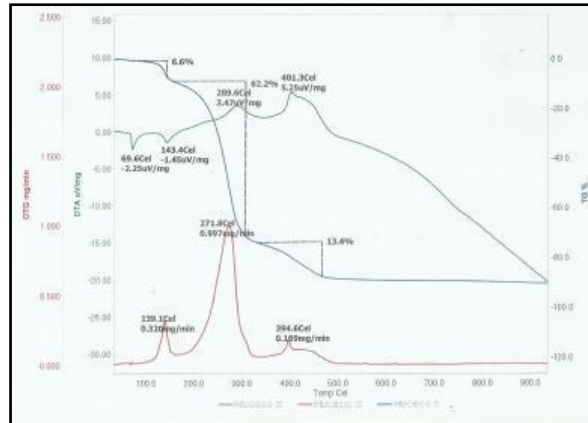


Figure 12. Graph of Thermogravimetry Analysis (TGA) of clay (OD1-Ast2).

From the results of the TGA test on OD1-Ast2 as shown in Figure above, it was found that the perfect phase change occurs at a temperature of about 305 °C, thus slightly higher than that of the perfect phase change in clay shale (OD1-Ast3). The first weight change at temperatures of about 160 ° C is the loss of water molecules contained in the crystal structure. While at a temperature of 305 ° C represents a significant second change of weight indicated was a structural change in clay material (OD1-Ast2) and the loss of water molecules chemically. When calcination was done at 470 ° C, many molecules in the clay shale (OD1-Ast2) was removed, which will affect the pore size change.

Then, a TGA test was performed on an OD1-Ast1 material that was tested on clay shale with a clay mixture composition of 50% and 50% stearate acid on both sizes of the powder. This test was performed to determine the structural damage to the material at the time of heating at high temperature (more than 400 ° C), because it can give description of the process of mass change of a material. From the test results with the TGA, the graphs obtained as shown in Figure 13.

From the results of the TGA test on clay shale as shown in Figure 13, it was found that the decrease in the percentage weight of clay shale occurred at $\pm 198^{\circ}\text{C}$ temperature, indicating that the water molecule was detached from the crystal structure on the clay shale. Then another decline occurs which is a perfect phase change occurs at temperatures around $\pm 285^{\circ}\text{C}$. The first weight change was the loss of water molecules contained in the crystal structure, whereas a significant second weight change was indicated a structural change in clay shale material and the loss of water molecules chemically. The weight loss before the decline at the last temperature was indicated the maximum temperature required for clay shale to start turning into oil shale. Whereas when calcination continues until from the last decline to constant, ie, at 425°C , many molecules in the clay shale was removed, so that there was a part of the shale in the pores that are released as well. This condition was referred to as over mature, where the graph line has shown a horizontal straight tendency with increasing temperatures up to 800°C , indicating that the material has been damaged and can not be used as oil shale material. Physically it can also be seen that the material that has been calcined at temperatures above 525°C becomes blackish. Thus the temperature required for the process of converting oil shale into crude oil required an ambient temperature of $\pm (285^{\circ}\text{C}-425^{\circ}\text{C})$.

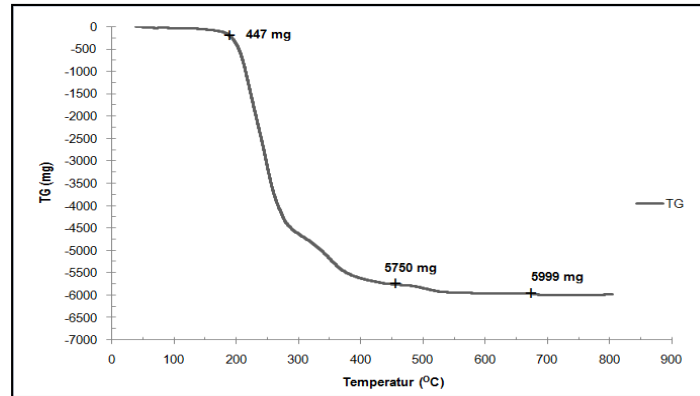


Figure 13. Graph of Thermogravimetry Analysis (TGA) of clay (OD1-Ast1)

Next, TGA testing was performed on OD1-Ast3 material that material with mixture composition of 67% clay and 33% stearic acid on both sizes of the powder. From the test results with the TGA, the graphs obtained as shown in Figure 13.

The results of the TGA test shown in Figure 13, it was found that the percentage decrease in weight of clay shale (OD1-Ast3) occurred at $\pm 140^\circ\text{C}$, indicating the water molecule detached from the crystal structure of the oil shale. Then another drop occurs which is a perfect phase change occurring at a temperature of about $\pm 300^\circ\text{C}$

The first weight change was the loss of water molecules contained in the crystal structure, whereas a significant second weight change was indicated a structural change in oil shale material and the loss of water molecules chemically. The weight loss before the decline at the last temperature indicated the maximum temperature required for clay shale to start turning into oil shale. Whereas when calcination continues until from the last decline to constant, ie, at 400°C , many molecules were present in the oil shale off, so that there was a part of the shale in the pores that was released as well. This condition was referred to as over mature, where the graph line has already shown a horizontal straight tendency with increasing temperatures up to 800°C , indicating that the material has been damaged and can not be used as a reference to other shale materials. Physically it can also be seen that the material has been calcined at temperatures above 600°C the color becomes blackish. Thus the temperature required to process the reaction of the shale material to crude oil requires an ambient temperature between $\pm 300^\circ\text{C}$, lower than that of OD1-Ast1 ie testing on clay shale with composition of 50% clay mixture and 50% salicylic acid, and OD1-Ast2 with a mixture composition of 33% clay and salicylic acid 67%.

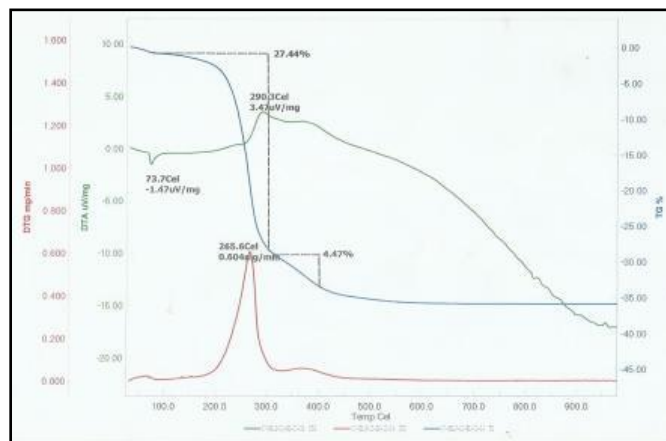


Figure 14. Graph of Thermogravimetry Analysis (TGA) of clay shale (OD1-Ast3)

TGA Test Result of Clay Material Added by Fe

The TGA test was performed on clay material (OD1-Ast2) added Fe (25%) to determine the temperature when cracking the material thermally on the material when heated at high temperatures (over 400 ° C), as it can provide an overview the process of changing the mass of a material. The test results with TGA are shown in Figure 15.

The clay material (OD1-Ast2) modified with the addition of metal material (Fe) was aimed at increasing the surface area and pore diameter, so it was expected to accelerate the reaction (the required temperature was smaller and also the time was faster). From the TGA test results on the Fe-organic clay as in Figure 15, it was found that the percentage decrease in weight occurred at ± 140 ° C temperature, indicating the water molecule detached from the crystal structure on the organic clay-Fe. Then another drop occurs which is a perfect phase change occurring at a temperature of about 290°C.

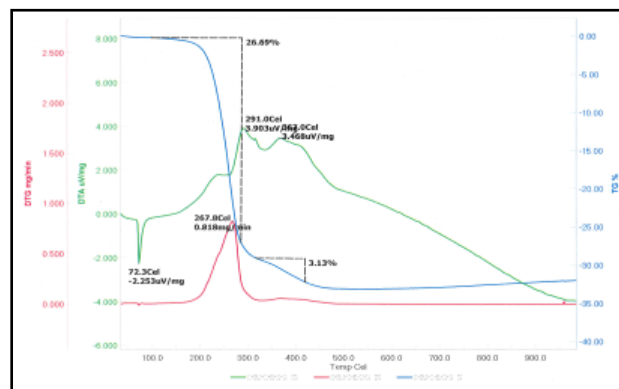


Figure 15. Graph of Thermogravimetry Analysis (TGA) for clay material (OD1-Ast2) added by Fe (25%)

The first weight change was the loss of water molecules contained in the crystal structure. While significant second-weight changes were indicated structural changes in the Fe-Clay organic material and the loss of water molecules chemically. Then calcination was done at 410°C, so many of the molecules in the kaolinite-stearic acid were released, so that part of the pillar was released as well. Based on the temperature data from the TGA test apparatus, it can be seen that the heating resistance at high temperatures possessed by clay shale-Fe was less than 410°C. If the calcination was done back to a temperature above 410°C, then many molecules in the OD1-Ast2-Fe material were released, so that it will affect the pore size change, and the result was gas.

Oil Shale Material Heating Duration

The heating process starts from the beginning until the remaining substances that have been damaged, it turns out for two variations of mixture and addition of Fe metals require a diverse time. Figure 16 shows a graph of decreasing the mass of clay-organic samples over time. OD1-Ast3, OD1-Ast2-Fe and CEC clearly show that the three materials undergo a faster heating process than others.

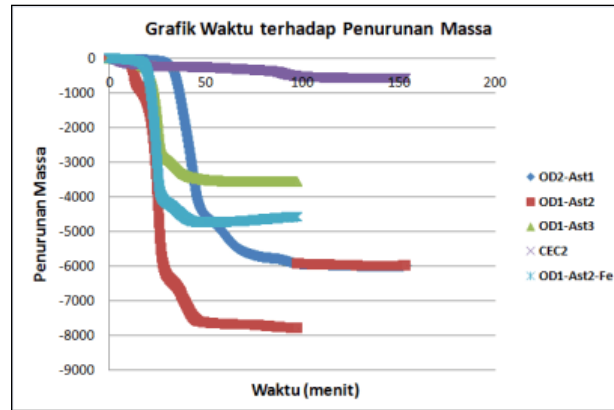


Figure 16. Graph of decline in time to reaction time on each clay-organic material and the addition of Fe.

CONCLUSION

From the results of this study, it can be concluded TOC (Total Organic Carbon) Test Result OD2-Ast1 (Clay 50% + Organic 50%) = 19.94%, OD2-Ast2 (Clay 33% + Organic 67%) = 34.38%, OD2-Ast3 (Clay 67% + Organic 33%) = 11.98%. The clay catalyst product may serve as a catalyst for accelerating organic maturation reactions. When compared with the clay material OD1-Ast1 (50% clay-50% organic), OD1-Ast2 (33% clay-67% organic), the OD1-Ast3 shale material (67% clay - 33% organic) has a reaction rate which is faster.

Comparison of clay material is smaller than organic, hence the catalyst properties to accelerate the reaction become decreased, such as OD1-Ast2 shale material has a slow reaction speed compared to OD1-Ast3 shale material, so that in the organic maturation OD1-Ast2 material requires reaction process as much three stages (long reaction). The addition of Fe metal into the clay catalyst product on the OD1-Ast2 shale material, the OD1-Ast2-Fe shale material (75% OD1-Ast2 and 25% Fe) has a faster reaction rate than before the Fe added.

CEC 2 (close to oil shale) in the heating process with clay catalyst and clay + Fe products requires a small reaction zone, because the material contains a lot of SiO₂ and Al which acts as a catalyst, in addition supported also by the condition of organic materials that have begun mature.

ACKNOWLEDGEMENT

The researcher would like to thank to Dikti who has provided research funding assistance, LPPM of Lampung University which has provided research opportunities and support, and Physics and Chemistry Laboratory at University of Indonesia and University of Lampung, which has provided measurement and testing opportunities so that this research can be completed.

REFERENCES

1. Barkia, H., Belkbir, L. and Jayaweera, S.A.A. 2004. Thermal analysis studies of oil shale residual carbon. *Journal of Thermal Analysis and Calorimetry*. 76 (2), pp.615-622.
2. Al-Hamaiedh, H., Maaitah, O., & Mahadin, S. 2010. Using oil shale ash in concrete binder. *Ejge*, 15, 601-608.
3. Kantsler, A. J., Cook, A. C., & Smith, G. C. 1978. Rank variation, calculated paleotemperatures in understanding oil, gas occurrence. *Oil and Gas Journal*, 20, 196-205.

4. Berraja, T., Barkia, H., Belkbir, L., & Jayaweera, S. A. A. 1988. Thermal analysis studies of the combustion of Tarfaya oil shale. In *Proceeding of an International Conference on Carbon, Carbon*, 88, pp. 18-23.
5. Bartis, James T.; LaTourrette, Tom; Dixon, Lloyd; Peterson, D.J.; Cecchine, and Gary. 2005. *Oil Shale Development in the United States. Prospects and Policy Issues. Prepared for the National Energy Technology Laboratory of the U.S. Department of Energy.*
6. Burnham, Alan K.; McConaghy, and James R. 2006. Comparison of the Acceptability of Various Oil Shale Processes. *26th Oil Shale Symposium. Golden, Colorado: Lawrence Livermore National Laboratory.*
7. Youngquist & Walter. 1998. Shale Oil-The Elusive Energy. *Hubbert Center Newsletter.*
8. Koel and Mihkel. 1999. Estonian oil shale. *Oil Shale. A Scientific-Technical Journal*
9. Subono, S. and Siswoyo. 1995. Thermal Studies of Indonesian Oil Basin. *CCOP Technical Bulletin*, 25, 37 -54.
10. Nagendrapa, G. 2002. *Organic Syntesis using Clay Catalyst.* J. Resonance. P. 64-77.
11. Xiufeng Xu, Yanfei Pan, Xiaoyan Cui, and Zhanghuai Suo. 2004. Catalytic Combustion of Methane Over Ti-Pillared Clay Supported Copper Catalysts. *Journal of Natural Gas Chemistry*, 13(4), 204.
12. Catrinescu, C., Teodosiu, C., Macoveanu, M., Mische-Brendle, J., & Le Dred, R. 2002. Iron containing pillared bentonites as heterogeneous fenton-type catalysts for the oxidation of phenol in wastewaters. *Environmental Engineering & Management Journal (EEMJ)*, 1(4).
13. Huan-Yan Xu, Xiu-Lan He, Ze Wu, Lian-Wei Shan, and Wei-Dong Zhang. 2009. Iron-loaded Natural Clay as Heterogeneous Catalyst for Fenton-like Discoloration of Dyeing Wastewater. *Bull. Korean Chem. Soc.*, 30(10).
14. Emam, E. A. 2013. Clays as catalysts in petroleum refining industry. *ARPN Journal of Science and Technology*, 3(4), 356-375.
15. Widjaya, R.R. 2012. *Bentonit Pilarisasi Cr dan Zeolit HZSM-5 Sebagai Katalis Pada Proses Konversi Ethanol Menjadi Biogasolin.* Master Tesis. Program Studi Ilmu Material Pascasarjana Fakultas Matematika Dan Ilmu Pengetahuan Alam. Universitas Indonesia.
16. Indrati T.Y., Hartati, P., and Murdani. 2000. Penentuan Energi Aktivasi Sinter Pelet (Th,U)O₂ Pada Tahap Pertumbuhan Butir. *Prosiding Penemuan dan Presentasi Ilmiah Penelitian Dasar Ilmu Pengetahuan dan Teknologi Nuklir.* P3TM-BATAN Yogyakarta. 25.
17. Cahyadi and Yulianto, S.N. 2011. Studi Perilaku Penyalaan Partikel Batubara Indonesia Menggunakan Thermogravimetric Analysis Dalam Kondisi O₂/n₂ dan O₂/CO₂. *Jurnal Ilmiah Teknologi Energi (JITE)*, 1(13), 24-33.
18. Sato, K., Takizawa, S., & Mohri, T. 2010. Theoretical calculation of activation free energy for self-diffusion in prototype crystal. *Materials transactions*, 51(9), 1521-1525.
19. Katarzyna Slopicka, Pietro Bartocci, and Francesco Fantozzi. 2011. *Thermogravimetric analysis and Kinetic study of poplar wood pyrolysis.* Third International Conference on Applied Energy. Perugia, Italy. pages 1687-1698.
20. Himawanto, D.A., Indarto, Saptoadi, H. and Rohmat, T.A. 2013. Thermogravimetric Analysis of Single-Particle RDF Combustion. *Modern Applied Science.*, 7(11), 34.
21. Himawanto, D. A. 2013. Penentuan Energi Aktivasi Pembakaran Briket Char Sampah Kota Dengan Menggunakan Metoda Thermogravimetry Dan Isothermal Furnace. *Rotasi*, 15(3), 35-42.

22. Riyanto, S. 2009. *Uji Kualitas Fisik Dan Uji Kinetika Pembakaran Briket Jerami Padi Dengan Dan Tanpa Bahan Pengikat*. Skripsi. Jurusan Teknik Mesin Fakultas Teknik Universitas Sebelas Maret Surakarta.
23. Yan Y.F., Zhang Z.E., Zhang L. and Zhang L. 2014. Influence of coal properties on the co-combustion characteristics of low-grade coal and city mud. *Global NEST Journal*, 16(2), 329-338.
24. Sugondo. 2012. Kinetika Pertumbuhan Butir Paduan Zry-4 Sn Rendah. *Urania*, 18(3), 120-181.
25. Sukma, H.L. 2012. *Analisis Thermogravimetry Dan Pembuatan Briket Tandan Kosong Dengan Proses Pirolisis Lambat*. Tugas Akhir Konversi Energi. Fakultas Teknologi Industri. Institut Teknologi Sepuluh Nopember Surabaya.
26. Malika. A., Mohammed, A. and Boukhelifi, A. 2014. Kinetic And Energy Study Of Thermal Degradation Of Biomass Materials Under Oxidative Atmosphere Using TGA, DTA And DSC. *Journal of Multidisciplinary Engineering Science and Technology (JMEST)*, 1(5).
27. Martono, Y., Sari, Y.E.P., and Hidarto, J. 2012. Penggunaan Model Arrhenius Untuk Pendugaan Masa Simpan Produk Minuman Kemasan Berdasarkan Kandungan Vit C. Paper. Program Studi Kimia, Fakultas Sains dan Matematika. Universitas Kristen Satya Wacana.
28. Suyitno. 2009. Perumusan Laju Reaksi dan Sifat-Sifat Pirolisis Lambat Sekam Padi Menggunakan Metode Analisis Termogravimetri. *Jurnal Teknik Mesin*, 11(1), 12-18.
29. Minarsih, T. 2011. Penentuan Energi Aktivasi Amlodipin Besilat Pada pH 1, 6 Dan 10 Dengan Metode Kromatografi Cair Kinerja Tinggi. *PHARMACY*. 6(1).
30. Dewanto, O., Bahri, S. and Atmojo, J.P. 2008. Analisis Perubahan Sifat-Sifat Fisika Batuan Organik terhadap Aliran Panas Bumi di Daerah 'X' Sumatera, untuk Menentukan Kandungan dan Daerah Oil Shale sebagai Sumber Energi Baru. *Prosiding Pertemuan Ilmiah Tahunan, HAGI 33rd Annual Convention & Exhibition*, Hyatt Regency Bandung.
31. Dewanto, O., Soegiyono, and B., Suharso. 2014. Comparison of Calcite (CaCO₃) and Clay (Illite/Kaolinite) Toward the Influence of Maturation and Organic Material Potential for Processing of Oil Shale Material. *International Journal of Basic & Applied Sciences IJBAS*, 14(5).
32. Dewanto, O., Spto Mulyanto, B., & Rustadi, R. (2017). Determining the Temperature of Shale Material Conversion Into Crude Oil Based on Organic Clay and Organic Carbonate Test Outside Reservoir. *International Journal of Mechanical & Mechatronics Engineering IJMME-IJENS*, 17(05), 84-89.