

# [JESR] Submission Acknowledgement

1 message

**JESR - Managing Editor** <jesr@eng.unila.ac.id> To: Irza Sukmana <irza.sukmana@gmail.com> Mon, Oct 17, 2022 at 9:31 PM

Irza Sukmana:

Thank you for submitting the manuscript, "The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series" to Journal of Engineering and Scientific Research. With the online journal management system that we are using, you will be able to track its progress through the editorial process by logging in to the journal web site:

Submission URL: https://jesr.eng.unila.ac.id/index.php/ojs/authorDashboard/submission/109 Username: isukmana

If you have any questions, please contact me. Thank you for considering this journal as a venue for your work.

JESR - Managing Editor

Journal of Engineering and Scientific Research

Journal of Engineering and Scie	ntific Research Tasks 44	
Since Journal of Engineering and Scientific Research Development of Engineering and Scientific Research Development of the science sector science scienc	ت English 109 / <b>Sukmana</b> / The Effect of Pin Sh	
Submissions	Markflere Publication	
Issues	Workflow Publication	
Announcements	Submission Review Copyed	diting
Settings	Production	
Users & Roles	Round 1	
Tools		
Statistics	<b>Round 1 Status</b> Submission accepted.	
	Notifications	
	[JESR] Editor Decision	2022-10-19 05:05 PM
	[JESR] Editor Decision	2022-10-19 05:06 PM
	[JESR] Editor Decision	2022-10-19 05:18 PM
	[JESR] Editor Decision	2022-10-19 05:19 PM
	<b>Reviewer's Attachments</b>	Q Search
	510-1, JESR Irza June2022_Reviewer comments_CB.docx	October 17, 2022

Revisions

Journal of Engineering and Scientific	Research Tasks 44	)		
	<ul> <li>513-1 Article</li> <li>9 V4E1 June 2022 re</li> </ul>	C English Text, Article ev.docx	<ul> <li>View Site</li> <li>October</li> <li>19,</li> <li>2022</li> </ul>	2 isukmana Article Text
	Review Discussion	S	Add disc	cussion
	Name	From Last Repl		Closed
		No Items		
		Platform & workflow by	<i>,</i>	
		OJS / PKF	)	

# The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series

## Irza Sukmana\*, Mad Nur, Agus Sugiri, Zulhanif, Nafrizal, and Harnowo Supriadi

Department of Mechanical Engineering, Faculty of Engineering, Universitas Lampung, Jl. Prof. Soemantri Brojonegoro No. 1 Bandar Lampung 35145. \*Email korespondensi: Irza.Sukmana@eng.unila.ac.id

Received: Accepted: Available online:

#### ABSTRACT

Aluminum is a material that is soft, lightweight, resistant to corrosion, and has good electrical and thermal conductivity. Aluminum has a specific gravity of about 2.65-2.8 kg/dm<sup>3</sup>, a melting point of 658°C, and tensile strength of 90 MPa. Aluminum 1100 series is an aluminum alloy mixed with other materials, such as copper, iron, chrome, manganese, and zinc, with an aluminum content of 99,0%. Welding is the joining of two metals in a liquid state with or without filler. FSW (friction stir welding) is friction welding; the process does not require filler material. The heat used to melt the metal is obtained from the friction between the indenter and the workpiece. In the research, the shape of the indenter pin used is, ovale shape, cone shape, and changing spiral form with a tool rotation of 2000 rpm and a welding rate of 16 mm/minute. The tests carried out are Rockwell hardness testing and tensile tests. From the results of research conducted, it was found that the shape of the indenter pin greatly affects the quality of the weld. The indenter pin changing spiral form results in better weld quality compared to the other two pin shapes.

Keywords: Aluminum, AA1100, pin shape, friction stir welding

## INTRODUCTION

Aluminum is a chemical element with the symbol Al and has the atomic number 13. Pure aluminum contains 66% bauxite and 33% clay. Aluminum has several physical properties, including a specific gravity of about 2.65-2.8 kg/dm<sup>3</sup>, a melting point of 658°C, a tensile strength of 90 MPa in pure aluminum or about 200-600 MPa in aluminum alloys, the atomic arrangement of an aluminum lattice is FCC or Face Centered Cubic. In addition, aluminum is soft, lightweight, corrosion resistant, and has a relatively good electrical and heat conductor (Prasetyana, 2016).

The use of aluminum metal is increasing from year to year, such as in the world of printing for photoengraved plate materials, the construction sector and the industrial world of machinery as a material for motor vehicles and also materials for aircraft fuselages, even for household appliances. However, in general, the use of these metals uses the type of rivet and solder connection. Both kinds of splicing have drawbacks and limitations; for example, splicing using a rivet will increase thickness, the use of added material, and the presence of wasted material from the rest of the drilling. To overcome this, the connection process uses the welding method.

Commented [U1]: Please use our official template

Commented [U3]: The citation style please use the JESR

1

Commented [U2]: Please state the conclution in line with the title

However, because aluminum has different physical characteristics from other metals, the welding process is challenging, and the welding results are not good. One welding method suitable for aluminum is Friction Stir Welding, as mentioned elsewhere (Rahayu, 2012).

FSW welding was initially developed by Wayne Thomas of The Welding Institute (TWI) in 1991 to research aluminum alloy material applications. FSW is a welding method in the solid-state welding category. The process takes place below the melting point of the workpiece. Therefore, FSW can be applied to connect similar materials or metals (similar metals) or different metals (dissimilar metals) (Pratisna et al, 2016).

The FSW method produces a smaller Thermomechanic Affected Zone (TMAZ) area than the Shield Metal Arc Welding (SMAW) welding method. Therefore, this welding method can reduce the potential for welding failure due to additives. In the FSW welding method, several parameters can affect the quality of welding, including tool rotation speed (rpm), tool translation speed (feeding), tool slope during welding, downforce, plunge depth tool, and tool design and material (Rahayu, 2012).

#### MATERIALS AND METHOD

In this study, Aluminum AA1100 series was carried out for friction stir welding method using different variation of tool design. In the following information the detail of samples preparation, FSW process, and the mechanical testing of the welded materials will be presented.

#### Materials

In this study, friction stir welding process was carried out using a VHF3 milling machine under the tool's rotation speed of 2000 rpm and 16 mm/minute of welding speed. The figure of VHF3 milling machine is presented on Fig. 1



Figure 1. Milling machine.

Aluminum series AA1100 is an alloy containing other elements, including copper, iron, chrome, manganese, and zinc. The minimum content of Aluminum was 99.0%. Aluminum and its alloys are classified as the light metals compared to iron or steel, with high strength, corrosion 2

Commented [U4]: Please add the aim of this study

resistance, and good electrical conductivity. Aluminum alloys, especially the AA1100 series has been applied broadly in the industrial fields. It was widely used as pressure vessels, heat exchangers, pipes, and others (Sukmana and Sustiono, 2016). The 1100 series aluminum welding process uses a length of 65 mm, a width of 50 mm, and a thickness of 6 mm.




Figure 2. Specimen dimensions

The indenter used for this welding is VCN steel, with three variations: ovale shave, cone shape, and changing spiral form. VCN steel is a type of steel with very high strength (ultrahigh strength steel). This type of steel has very high flexibility, toughness, and strength. This material is widely used to withstand impact loads with high strength. VCN steel is a type of low alloy steel or low alloy steel with an alloying element content of less than 5%. The chemical composition of this type of VCN steel is 0.38% C, 0.20% Si, and 0.70% Mn. 1.50% Cr, 96.79% Fe, 0.20% Mo and 1.64% Ni (Herlina et al, 2016).




Figure 3. FSW Pin Shapes (a) Ovale shape, (b) Cone shape, and (c) Changing spiral form.

#### Specimen for Mechanical Testing

After the specimens AA1100 are welded, hardness tests and tensile tests are carried out. The hardness test is a Rockwell hardness test using the HRf standard, as presented on figure 4. The tensile test was carried out on the welding results using the ASTM E8/E8M standard, with the dimensions of the test specimen as shown in fig. 5 below.



Figure 4. Hardness test equipment.




Figure 5. Tensile test specimen

#### **RESULTS AND DISCUSSION**

#### **Rockwell Hardness Test**

Material hardness can be defined as the material's resistance to the compressive force of a different, more rigid material. There are three pressing methods: the scratch, the reflected, and the press. The amount of load and the type of indenter to be used varies according to the kind of material to be tested. However, in the Brinell test, the type of indenter and the load used are smaller so that a slight indentation and a smooth surface are obtained. This method is widely used in the industrial world because the procedure is carried out faster (Nugroho, 2010).

The hardness test used is a Rockwell hardness test with a scale of f with a steel ball indenter with a diameter of 1/16", a minor load (F0) of 10 kgf, a major load (F1) of 90 kgf, with a total load (F) of 100 kgf. The tests included six specimens from friction stir welding and one original sample (raw material). For samples resulting from friction stir welding, hardness tests were carried out in the Weld Nugget (WN), Thermomechanically Affected Zone (TMAZ), and Heat-Affected Zone (HAZ) areas with three points each. The following are the results of the Rockwell hardness test as presented on table 1.

Table 1. Rockwell hardness test data

Commented [U5]: Table and title should be in the same page

N-	Pin No shapes		N V		HRf			HRf Average		
NO	<b>F</b>	(rpm)	(mm/min)	BM	TMAZ	HAZ	BM	TMAZ	HAZ	
				47	44	41				
1				45	41	41	45.33	41.33	41	
	Oval	2000	16	44	39	41				
	Shape	2000	10	47	40	40				
2				36	40	41	41	41.33	40.67	
				40	44	41				
		Х	(average)				43.165	41.33	40,835	
		2000		45	43	38	42.67	42.67	38.33	
3			0 16	42	40	35				
	Cone			41	45	42				
	Shapes			42	43	38	42.33	42.67	40	
4				43	42	41				
				42	43	41				
		Х	(average)				42.5	42.67	39.165	
				45	42	39				
5	Changing			45	44	41	45.33	43.67	40.33	
	Changing Spiral	2000	16	46	45	41				
	Form	2000	10	44	41	41				
6	TOTIL			45	43	40	44.67	42.67	41	
				45	44	42				
		Х	(average)				45	43.17	40,605	
	Raw N	/laterial		52	53	51		52		

The results of the Rockwell hardness test in the Weld Nugget (WN) area showed that the highest hardness value is in the indenter changing spiral form, which is 45, and the lowest value is in the indenter cone shape, which is 42.5. In the Thermomechanically Affected Zone (TMAZ) area, the highest hardness value is found in the indenter changing spiral form, which is 43.17, and the lowest value is in the ovale shape indenter, which is 41.33. In the Heat-Affected Zone (HAZ) area, the highest hardness value is found in the ovale shape indenter, which is 40.835, and the lowest hardness value is in the cone shape indenter is 39.165, as presented on fig. 6.




Figure 6. Graph of Rockwell hardness values

The hardness values of the three types of indenter pins used in the weld area being tested for hardness, namely Weld Nugget (WN), Thermomechanically Affected Zone (TMAZ), and Heat-Affected Zone (HAZ), almost always decrease compared to the base material area. In the WN area, the hardness value decreases because this area is completely recrystallized; the

decrease is also caused because the FSW welding process does not use filler material. In the TMAZ area, the hardness value also decreases below the WN value; this is because, in that area, the plastic deformation of the material is caused by the influence of heat. Finally, in the HAZ area, the decrease is most significant because, in this area, the material undergoes a thermal cycle which causes changes in the microstructure.

#### **Tensile Test**

The tensile test is a method used to determine the strength of a material by applying a load with an axial force. The test is carried out by clamping at both ends of the test specimen on the tensile test load frame and the results were presented on Table 2. At the time of testing, the tensile force used for testing is obtained from a universal testing machine which will cause an elongation of the specimen until the specimen breaks (Dowling & Norman, 1999).

Tabla	2	Tensile	tost	roculte
I able	2.	Tensne	test	results.

Specimen	Pin Shapes	N (rpm)	v (mm/min)	UTS (MPa)	Yield Strength (MPa)	Fracture Area
1	Orial Shamaa	2000	16	64,105	50,001	SZ
2	Oval Shapes	2000	10	65.045	50.943	SZ
	x (average)		64.575	50,472		
3	Cone Shanes	2000	16	64,935	54.586	SZ
4	Cone Shapes	2000		59,370	49,260	SZ
	x (average)			62.153	52,058	
5	Changing	2000	16	100.570	59,660	SZ
6	Spiral Form	2000	16	91,866	59,295	SZ
	x (average)		96.218	59,478		
	Raw Materia	ıl	209,764	92.587		

The tensile test results have the highest ultimate stress value of 96,218 MPa with an indenter changing spiral form and the lowest maximum stress value of 63,153 MPa with a cone shape indenter. Meanwhile, the highest yield strength value is 59.478 MPa with an indenter changing spiral form, and the lowest yield strength value is 50.472 MPa with an ovale shape indenter. From the results of the tensile test, the shape of the indenter changing spiral form is superior compared to the ovale and cone shape indenter. This is because the shape of the indenter changing spiral form has a larger mixing area so that when welding, the surface of the specimen is penetrated more broadly and evenly. In addition, this shape of the indenter also has a larger surface area, so the holding time of five minutes can be done quickly and produce a better heating area and heat. The following is a graph of the tensile test results as on Fig. 7.


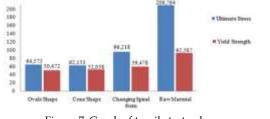


Figure 7. Graph of tensile test value

#### Welding Defects

In friction stir welding, several defects often occur, namely lack of penetration, surface tearing, and internal voids. Lack of penetration is a defect in the weld nugget (WN) where the weld does not entirely reach the bottom of the welded specimen. This defect occurs because the length of the indenter pin is less than the thickness of the sample being welded. The data of welding defect is presented on Table 3. At the same time, the surface tearing defect occurs on the surface of the weld where the surface is cracked or uneven. This defect occurs due to several factors, including the rotation speed of the indenter and the welding speed being too fast or too low, the indenter pressure on the specimen not perfect, and the sample placement being uneven.

#### Table 3. Welding defects



From the results of visual observations on the effects of friction stir welding of aluminum 1100 series, as shown in table 8, there are defects in each welding performed; only the quantity of defects is different. In specimens that use the ovale shape indenter, there are many defects of lack of penetration, surface tearing, and internal voids. Samples using cone shape indenters experienced the most lack of penetration and internal voids when compared to specimens using other types of indenters. The specimens that use the kind of indenter changing spiral form the slightest defects. Welding defects that occur in the sample significantly affect the quality of the welding of the specimen. The results of welding using an indenter changing spiral form have slight imperfections, so the quality of the welding results is outstanding, as indicated by the high hardness and tensile test values. While welding using an Ovale Shape indenter which has many defects, the quality of the welding results decreases with the results of the hardness test and tensile test being low.

#### CONCLUSION

The highest hardness value in the Weld Nugget (WN) area is found in the changing spiral form indenter, which is 45, and the lowest value is located in the cone shape indenter, which is 42.5. In the Thermomechanically Affected Zone (TMAZ) area, the highest hardness value is found in the changing spiral form indenter, which is 43.17, and the lowest value is in the ovale shape indenter, which is 41.33. In the Heat-Affected Zone (HAZ) area, the highest hardness value is found in the ovale shape indenter, which is 40.835, and the lowest hardness value is in the cone shape indenter is 39.165. The highest ultimate stress value is 96.218 MPa with a changing spiral form indenter.

7

**Commented [U6]:** The space is there, please use all space for better view presentation

The highest yield strength value is 59.478 MPa with an indenter changing spiral form, and the lowest yield strength value is 50 472 MPa with an oval shape indenter. This type of indenterchanging spiral form has a high quality of welding, resulting in both hardness and tensile strength.

#### ACKNOWLEDGEMENTS

The author declares that all the authors involved in this writing are the main contributors. Violence testing is supported by the Directorate of Infrastructure and Innovation of the Indonesian National Research and Innovation Agency.

#### REFERENCES

- Dowling, N. E. 2013. "Mechanical Behavior of Materials: Engineering Methods for Deformation, Fracture, and Fatigue". 4th Edition. Prentice Hall, New Jersey 07458, United States of America.
- Herlina, F., Firman, M., Najib, M. 2016. "Analisa Kekerasan Baja VCN 150 pada Poros Baling-baling Pisau Mesin Crusher". UNISKA Journal of Mechanical Engineering Vol. 01 No. 02, pp. 26-32.
- Sakura, R. R., Junus, S., Jatisukamto, G., & Septian, R. 2017. "Pengaruh Variasi Waktu Gesek Friction Welding pada Baja AISI 1045 Dengan Sudut *Chamfer* 15<sup>o</sup> Terhadap Sifat Mekaniknya. Elemen Jurnal Teknik Mesin, Vol. 4, no. 2, pp. 113-116.
- Prasetyana. D. 2016. "Pengaruh Kedalaman Pin (*Depth Plunge*) Terhadap Kekuatan Sambungan Las Pada Pengelasan Adukan Gesek Sisi Ganda (*Double Sided Friction Stir Welding*) Aluminium Seri 5083". Skripsi, University Muhammadiyah Surakarta, Kartosuro - Surakarta.
- Pratisna, P., Anggertyo, I., Adhiptya, P. N. A. 2017. "Sifat Fisik dan Mekanik Sambungan Las Friction Stir Welding (FSW) AA 5083 dengan Variasi Bentuk dan Kecepatan Putar Probe Pada Konstruksi Kapal".
   Prosiding Seminar National XI - Rekayasa Teknologi Industri dan Informasi. Sekolah Tinggi Teknologi Nasional (STTN), Yogyakarta.
- Rahayu, D. 2012. "Analisis Proses Friction Stir Welding (FSW) pada Plat Tipis Aluminium". Laporan Skipsi. Universitas Indonesia, Depok, Indonesia.
- Sukmana, I., & Sustiono, A. 2016. "Pengaruh Kecepatan Putar Indentor Las Gesek Puntir (Friction Stir Welding (FSW) Terhadap Kualitas Hasil Pengelasan Aluminium 1100-H18". Jurnal Mechanical. Vol. 7, No. 1, p. 15-19.

**Commented [U7]:** It is not clear the purpose of this acknowledgement. You may remove if nothing to inform

Commented [U8]: Please use the jesr official template

5/23, 9:17 PM	Irza Sukmana, The Effect	of Pin Shape on the Fr	iction Stir Welding Qu	ality of Aluminum AA1	100 Series
Journal of Engineering ar	nd Scientific Research	Tasks 45	English	View Site	占 isukn
JESR Ita Journal of Engineering and Scientific Research Home page. http://programia.co.il/index.php/cjs	Territori ante anti				
nu di da la man	109 / <b>Sukm</b> a	ana / The Effect	t of Pin Shape or	n the Friction Stir	Library
ubmissions					
ssues	Workflow	Publication			
ssues					
Announcements	Submission	n Review	Copyediting		
settings	Production	I.			
Jsers & Roles					
	Round 1				
ools					
statistics	Round	1 Status			
		sion accepted.			
	Notificati	- 19 G			
	Notificati	OIIS			
	[JESR] Ed	itor Decision		2022-10-19 0	5:05 PM
	[JESR] Ed	itor Decision		2022-10-19 0	5:06 PM
	[JESR] Ed	itor Decision		2022-10-19 0	5:18 PM
	[JESR] Ed	itor Decision		2022-10-19 0	5:19 PM
	Reviewe	er's Attachmer	nts	Q S	earch
	₩ 510-	1 , JESR Irza June	e	October	
	2022_Rev	viewer comments	_CB.docx	17, 2022	
	Revisior	าร	Q S	earch Uploa	d File

Irza Sukmana, The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series

Journal of Engineering and Scientific	Research	Tasks 45	🔇 Engli	ish	• View Site	💄 isukı	mana
	V4E1 Ju	une 2022 rev.docx			,	Text	
				2	2022		
	Review	Discussions			Add disc	ussion	
	Name		From	Last Reply	Replies	Closed	
			No Items				

Platform & workflow by OJS / PKP

# The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series

Irza Sukmana<sup>1,\*</sup>, Mad Nur<sup>1</sup>, Agus Sugiri<sup>1</sup>, Sugiyanto<sup>1</sup>, and Irfan Hilmy<sup>2</sup>

<sup>1</sup>Department of Mechanical Engineering, Faculty of Engineering, Universitas Lampung, Jl. Prof. Sumantri Brojonegoro no. 1 Bandar Lampung 35145, Indonesia

<sup>2</sup>Department of Mechanical Engineering, Faculty of Engineering, Higher College of Technology, Fujairah Campus, Sheikh Khalifa Bin Zayed Rd, Near City Center Fujairah - Fujairah - Uni Emirat Arab

\*Email: Irza.Sukmana@eng.unila.ac.id

Article Information:	Abstract
Received: 6 March 2022	Aluminum is a material that is soft, lightweight, resistant to corrosion, and has good electrical and thermal conductivity. Aluminum has a specific gravity of about 2.65-2.8 kg/dm <sup>3</sup> , a melting point of 658°C, and tensile strength of 90 MPa.
Received in revised form: 22 May 2022	Aluminum 1100 series is an aluminum alloy mixed with other materials, such as copper, iron, chrome, manganese, and zinc, with an aluminum content of 99,0%. Welding is the joining of two metals in a liquid state with or without filler. FSW (friction stir welding) is friction welding; the process does not require filler
Accepted: 25 June 2022	material. The heat used to melt the metal is obtained from the friction between the indenter and the workpiece. In the research, the shape of the indenter pin used is, oval shape, cone shape, and changing spiral form with a tool rotation of 2000 rpm
Volume 4, Issue 1, June 2022 pp. 45 – 49	and a welding rate of 16 mm/minute. The tests carried out are Rockwell hardness testing and tensile tests. From the results of research conducted, it was found that the shape of the indenter pin greatly affects the quality of the weld. The indenter pin changing spiral form results in better weld quality compared to the other two pin shapes.
http://doi.org/10.23960/jesr.v4i1.109	Keywords: Aluminum, AA1100, pin shape, friction stir welding

# I. INTRODUCTION

A luminum is a chemical element with the symbol Al and has the atomic number 13. Pure aluminum contains 66% bauxite and 33% clay. Aluminum has several physical properties, including a specific gravity of about 2.65-2.8 kg/dm<sup>3</sup>, a melting point of 658°C, a tensile strength of 90 MPa in pure aluminum or about 200-600 MPa in aluminum alloys, the atomic arrangement of an aluminum lattice is FCC or Face Centered Cubic. In addition, aluminum is soft, lightweight, corrosion resistant, and has a relatively good electrical and heat conductor [1].

The use of aluminum metal is increasing from year to year, such as in the world of printing for photoengraved plate materials, the construction sector and the industrial world of machinery as a material for motor vehicles and also materials for aircraft fuselages, even for household appliances. However, in general, the use of these metals uses the type of rivet and solder connection. Both kinds of splicing have drawbacks and limitations; for example, splicing using a rivet will increase thickness, the use of added material, and the presence of wasted material from the rest of the drilling. To overcome this, the connection process uses the welding method. However, because aluminum has different physical characteristics from other metals, the welding process is challenging, and the welding results are not good. One welding method suitable for aluminum is Friction Stir Welding, as mentioned elsewhere [2].

FSW welding was initially developed by Wayne Thomas of The Welding Institute (TWI) in 1991 to research aluminum alloy material applications. FSW is a welding method in the solid-state welding category. The process takes place below the melting point of the workpiece. Therefore, FSW can be applied to connect similar materials or dissimilar metals [3].

The FSW method produces a smaller Thermomechanical Affected Zone (TMAZ) area than the Shield Metal Arc Welding (SMAW) welding method. Therefore, this welding method can reduce the potential for welding failure due to additives. In the FSW welding method, several parameters can affect the quality of welding, including tool rotation speed (rpm), tool translation speed (feeding), tool slope during welding, downforce, plunge depth tool, and tool design and material [2].

# **II. MATERIALS AND METHODS**

In this study, Aluminum AA1100 series was carried out for friction stir welding method using different variation of tool design. In the following information the detail of samples preparation, FSW process, and the mechanical testing of the welded materials will be presented.

# A. Materials

In this study, friction stir welding process was carried out using a VHF3 milling machine under the tool's rotation speed of 2000 rpm and 16 mm/minute of welding speed. The figure of VHF3 milling machine is presented on Fig. 1.



Figure 1. Milling machine

Aluminum series AA1100 is an alloy containing other elements, including copper, iron, chrome, manganese, and zinc. The minimum content of Aluminum was 99.0%. Aluminum and its alloys are classified as the light metals with high strength, corrosion resistance, and good electrical conductivity. Aluminum alloys, especially the AA1100 series has been applied broadly in the industrial fields. It was widely used as pressure vessels, heat exchangers, pipes, and others [4]. The 1100 series aluminum welding process uses a length of 65 mm, a width of 50 mm, and a thickness of 6 mm, as on figure 2.

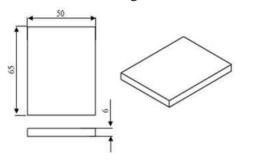
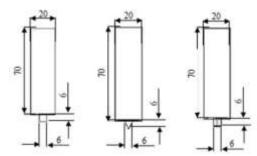


Figure 2. Specimen dimensions

The indenter used for this welding is VCN steel, with three variations, i.e.: oval shave, cone shape, and changing spiral form, as presented on figure 3. VCN steel is a type of steel with very high strength (ultrahigh strength steel). This type of steel has very high flexibility, toughness, and strength. This material is widely used to withstand impact loads with high strength. VCN steel is a type of low alloy steel or low alloy steel with an alloying element content of less than 5%. The chemical composition of this type of VCN steel is 0.38% C, 0.20% Si, and 0.70% Mn. 1.50% Cr, 96.79% Fe, 0.20% Mo and 1.64% Ni [5].



**Figure 3.** FSW Pin Shapes (a) Ovale shape, (b) Cone shape, and (c) Changing spiral form

# **B.** Specimen for Mechanical Testing

After the specimens AA1100 are welded, hardness tests and tensile tests are carried out. The hardness test is a Rockwell hardness test using the HRf standard, as presented on figure 4. The tensile test was carried out on the welding results using the ASTM E8/E8M standard, with the dimensions of the test specimen as shown in fig. 5 below.



Figure 4. Hardness test equipment




Figure 5. Tensile test specimen

# **III. RESULTS AND DISCUSSIONS**

# A. Rockwell Hardness Test

Material hardness can be defined as the material's resistance to the compressive force of a different, more rigid material. There are three pressing methods: the scratch, the reflected, and the press. The amount of load and the type of indenter to be used varies according to the kind of material to be tested. However, in the Brinell test, the type of indenter and the load used are smaller so that a slight indentation and a smooth surface are obtained. This method is widely used in the industrial world because the procedure is carried out faster [6].

The hardness test used is a Rockwell hardness test with a scale of "f" with a steel ball indenter with a diameter of 1/16", a minor load (F0) of 10 kgf, a major load (F1) of 90 kgf, with a total load (F) of 100 kgf. The tests included six specimens from friction stir welding and one original sample (raw material). For samples resulting from friction stir welding, hardness tests were carried out in the Weld Nugget (WN), Thermomechanically Affected Zone (TMAZ), and Heat-Affected Zone (HAZ) areas with three points each. The following are the results of the Rockwell hardness test as presented on table 1.

Table 1. Rockwell hardness test data

No shapes	. N	v	HRI		HRI Atseage									
200		(thes)	(mm/min)	BM	TMAZ	HAZ	BM	TMAZ           i         41.33           41.33         41.33           5         41.33           7         42.67           42.67         43.67	HAZ					
-				47	44	41								
1	1 Oral			45	41	41	45.35	41.33	41					
		2000	16	44	. 59	41		1000						
	Shepe	2000	14	47	40	43								
2				36	40	41	41	41.53	40.67					
				40	44	41								
			(atmage)	1000			43.165	41.33	40,835					
									45	43	31	1.		
5	- C		0 16	42	40	35	42.67	42,67	38.33					
	Cone			-41	45	42								
	Shapes			42	43	31	42.33	42.67	40					
4	8			43	42	41								
_				42	- 43	41								
- 1	9	X	(average)		07.0		42.5	42.67	39,161					
				-42	42	.29			1000					
5	-			-45	44	41	45.33	43.67	40.33					
-	Changing Spiral	2000	16	46	. 45	-41								
	Form		1.20	-44	41	41								
6	1000			45	43	40	44.67	42.67	41					
2.				-45	44	42								
	1		(average)		100		45	43,17	40,605					
	Raw N	External		- 52	53	51		. 52						

The results of the Rockwell hardness test in the Weld Nugget (WN) area showed that the highest hardness value is in the indenter changing spiral form, which is 45, and the lowest value is in the indenter cone shape, which is 42.5. In the Thermo-mechanically Affected Zone (TMAZ) area, the highest hardness value is found in the indenter changing spiral form, which is 43.17, and the lowest value is in the ovale shape indenter, which is 41.33. In the Heat-Affected Zone (HAZ) area, the highest hardness value is found in the ovale shape indenter, which is 40.835, and the lowest hardness value is in the ovale shape indenter, which is 40.835, and the lowest hardness value is in the cone shape indenter is 39.165, as presented on fig. 6.



Figure 6. Graph of Rockwell hardness values

The hardness values of the three types of indenter pins used in the weld area being tested for hardness, namely Weld Nugget (WN), Thermo-mechanically Affected Zone (TMAZ), and Heat-Affected Zone (HAZ), almost always decrease compared to the base material area.

In the WN area, the hardness value decreases because this area is completely recrystallized; the decrease is also caused because the FSW welding process does not use filler material. In the TMAZ area, the hardness value also decreases below the WN value; this is because, in that area, the plastic deformation of the material is caused by the influence of heat. Finally, in the HAZ area, the decrease is most significant because, in this area, the material undergoes a thermal cycle which causes changes in the microstructure.

# **B.** Tensile Test

The tensile test is a method used to determine the strength of a material by applying a load with an axial force. The test is carried out by clamping at both ends of the test specimen on the tensile test load frame and the results were presented on Table 2. At the time of testing, the tensile force used for testing is obtained from a universal testing machine which will cause an elongation of the specimen until it breaks [7].

The tensile test results have the highest ultimate stress value of 96,218 MPa with an indenter changing spiral form and the lowest maximum stress value of 63,153 MPa with a cone shape indenter.

Table 2. Tensile test results

Specimen	Pin Shapen	N (ipma)	y (mm/mm)	UTS (MPa)	Vield Strength (MPa)	Fracture Area
.1	Gud Change	2000	14	64,105	50,001	82
2	Oval Shapes	2000	16	65.045	50.943	52
	& Laverage	1		64.975	50,472	
	3	Colored C	10	64,935	54.585	52
4	Cone Shapes	2000		59,370	49,260	52
	x Greenge	j		62.153	52.058	
- 5	Changing	2000	16	100.570	59,660	- SZ
- 10	Spiral Form	2000	10	91,806	59,205	5Z .
	X Laverage	1	96.218	59,478		
	Raw Mater	ab		209,764	92.587	

Meanwhile, the highest yield strength value is 59.478 MPa with an indenter changing spiral form, and

the lowest yield strength value is 50.472 MPa with an ovale shape indenter.

From the results of the tensile test, the shape of the indenter changing spiral form is superior compared to the ovale and cone shape indenter. This is because the shape of the indenter changing spiral form has a larger mixing area so that when welding, the surface of the specimen is penetrated more broadly and evenly.

In addition, this shape of the indenter also has a larger surface area, so the holding time of five minutes can be done quickly and produce a better heating area and heat. The following is a graph of the tensile test results as on Fig. 7.


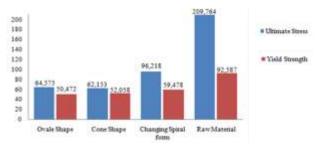


Figure 7. Graph of tensile test value

# C. Welding Defects

In friction stir welding, several defects often occur, namely lack of penetration, surface tearing, and internal voids. Lack of penetration is a defect in the weld nugget (WN) where the weld does not entirely reach the bottom of the welded specimen. This defect occurs because the length of the indenter pin is less than the thickness of the sample being welded. The data of welding defect is presented on Table 3.



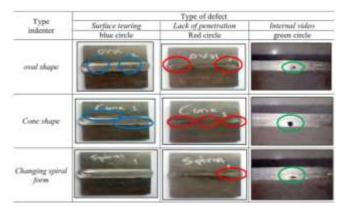

At the same time, the surface tearing defect occurs on the surface of the weld where the surface is cracked or uneven. This defect occurs due to several factors, including the rotation speed of the indenter and the welding speed being too fast or too low, the indenter pressure on the specimen not perfect, and the sample placement being uneven. From the results of visual observations on the effects of friction stir welding of aluminum 1100 series, as shown in table 8, there are defects in each welding performed; only the quantity of defects is different. In specimens that use the ovale shape indenter, there are many defects of lack of penetration, surface tearing, and internal voids. Samples using cone shape indenters experienced the most lack of penetration and internal voids when compared to specimens using other types of indenters.

The specimens that use the kind of indenter changing spiral form the slightest defects. Welding defects that occur in the sample significantly affect the quality of the welding of the specimen. The results of welding using an indenter changing spiral form have slight imperfections, so the quality of the welding results is outstanding, as indicated by the high hardness and tensile test values. While welding using an Ovale Shape indenter which has many defects, the quality of the welding results decreases with the results of the hardness test and tensile test being low.

# **IV. CONCLUSIONS**

The highest hardness value in the Weld Nugget (WN) area is found in the changing spiral form indenter, which is 45, and the lowest value is located in the cone shape indenter, which is 42.5. In the Thermomechanically Affected Zone (TMAZ) area, the highest hardness value is found in the changing spiral form indenter, which is 43.17, and the lowest value is in the ovale shape indenter, which is 41.33. In the Heat-Affected Zone (HAZ) area, the highest hardness value is found in the ovale shape indenter, which is 40.835, and the lowest hardness value is in the cone shape indenter is 39.165. The highest ultimate stress value is 96.218 MPa with a changing spiral form indenter, and the lowest ultimate stress value is 63.153 MPa with a cone shape indenter. The highest yield strength value is 59.478 MPa with an indenter changing spiral form, and the lowest yield strength value is 50 472 MPa with an oval shape indenter. This type of indenter-changing spiral form has a high quality of welding, resulting in both hardness and tensile strength.

# REFERENCES

[1] Prasetyana. D. 2016. "Pengaruh Kedalaman Pin (Depth Plunge) Terhadap Kekuatan Sambungan Las Pada Pengelasan Adukan Gesek Sisi Ganda (Double Sided Friction Stir Welding) Aluminium Seri 5083". Skripsi. University Muhammadiyah Surakarta, Kartosuro -Surakarta.

- [2] Rahayu, D. 2012. "Analisis Proses Friction Stir Welding (FSW) pada Plat Tipis Aluminium". Laporan Skipsi. Universitas Indonesia, Depok, Indonesia.
- [3] Pratisna, P., Anggertyo, I., Adhiptya, P. N. A. 2017. "Sifat Fisik dan Mekanik Sambungan Las Friction Stir Welding (FSW) AA 5083 dengan Variasi Bentuk dan Kecepatan Putar Probe Pada Konstruksi Kapal". Prosiding Seminar National XI - Rekayasa Teknologi Industri dan Informasi. Sekolah Tinggi Teknologi Nasional (STTN), Yogyakarta.
- [4] Sukmana, I., & Sustiono, A. 2016. "Pengaruh Kecepatan Putar Indentor Las Gesek Puntir (Friction Stir Welding (FSW) Terhadap Kualitas Hasil Pengelasan Aluminium 1100-H18". Jurnal Mechanical. Vol. 7, No. 1, p. 15-19.

- [5] Herlina, F., Firman, M., Najib, M. 2016. "Analisa Kekerasan Baja VCN 150 pada Poros Baling-baling Pisau Mesin Crusher". UNISKA Journal of Mechanical Engineering Vol. 01 No. 02, pp. 26-32.
- [6] Sakura, R. R., Junus, S., Jatisukamto, G., & Septian, R. 2017. "Pengaruh Variasi Waktu Gesek Friction Welding pada Baja AISI 1045 Dengan Sudut Chamfer 150 Terhadap Sifat Mekaniknya. Elemen Jurnal Teknik Mesin, Vol. 4, no. 2, pp. 113-116.
- [7] Dowling, N. E. 2013. "Mechanical Behavior of Materials: Engineering Methods for Deformation, Fracture, and Fatigue". 4th Edition. Prentice Hall, New Jersey 07458, United States of America.

# **Notifications**

# [JESR] Editor Decision

2022-10-19 05:18 PM

## Irza Sukmana:

We have reached a decision regarding your submission to Journal of Engineering and Scientific Research, "The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series".

Our decision is to: Accept Submission

Journal of Engineering and Scientific Research

Notifications(JESR) Editor Decision2022-10-19 05:05 PM(JESR) Editor Decision2022-10-19 05:06 PM(JESR) Editor Decision2022-10-19 05:18 PM(JESR) Editor Decision2022-10-19 05:19 PM(JESR) Editor Decision2022-10-19 05:19 PMNotificationsQ Search(Notifications)0ctober2022\_Reviewer comments\_CB.docx17, 2022RevisionsQ Search(Upload File)

https://jesr.eng.unila.ac.id/index.php/ojs/authorDashboard/submission/109

# Notifications

# [JESR] Editor Decision

2022-10-19 05:18 PM

Irza Sukmana:

We have reached a decision regarding your submission to Journal of Engineering and Scientific Research, "The Effect of Pin Shape on the Friction Stir Welding Quality of Aluminum AA1100 Series".

Our decision is to: Accept Submission

Journal of Engineering and Scientific Research