

PAPER NAME

Amrizal FoITIC_2020

AUTHOR

Amrizal Amrizal

WORD COUNT

2483 Words

CHARACTER COUNT

13043 Characters

PAGE COUNT

5 Pages

FILE SIZE

392.5KB

SUBMISSION DATE

Dec 4, 2022 10:29 AM GMT+7

REPORT DATE

Dec 4, 2022 10:29 AM GMT+7

● 17% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.

- 11% Internet database
- 15% Publications database
- Crossref database
- Crossref Posted Content database

● Excluded from Similarity Report

- Submitted Works database
- Bibliographic material
- Quoted material
- Cited material
- Small Matches (Less than 8 words)
- Manually excluded sources
- Manually excluded text blocks

Effect of nanofluid concentration on the performance of PV/T collector under the tropical climate of Indonesia

Amrizal^{1*}, Agung Nugroho², Miftahul Aziz², Muhammad Irsyad¹ and Amrul¹

¹ Department of Mechanical Engineering, Universitas Lampung (Unila), Bandar Lampung - INDONESIA

² Magister of Mechanical Engineering, Universitas Lampung (Unila), Bandar Lampung - INDONESIA

* Corresponding author e-mail: amrizal@eng.unila.ac.id

Abstract

Solar energy is a very potential and most abundant source energy available and it is free of cost in consuming this type of energy. Flat plate solar collector is a device that can transform solar energy into the thermal energy and can be implemented to PV/T solar collector. In this study, a modified flat-plate PV/T solar collector was built by attaching the thermal collector underneath the PV collector surface. The application of nanofluid in the PV/T solar collector as a heat-absorbing medium needs to be developed and characterized in different environments condition. The effect of nanofluid concentration on the performance of the PV/T collector was investigated according to EN 12975-2 standard. The volume fraction of the nanoparticles used in the present study were 0.3%, 0.6% and 0.9%, respectively. The efficiency of the system was compared to the water as a base fluid performed in low latitude tropical region (Bandar Lampung climate). The experimental result shows that an increase of zero thermal efficiency up to 18% which is obtained by using nanofluid at the volume fraction of 0.9%.

Keywords: Solar, collector, PV/T, nanofluid, PV/T, tropical

1. Introduction

The sun is a renewable energy source that has several advantages such as being easily available, free of pollution and available in considerable quantities. A flat plate solar thermal collector is a device used to harness solar energy. This type collector is widely used to absorb solar radiation and transform it into heat energy which produces domestic hot water. In other applications, this type collector also can be implemented to absorb the excess heat collected on the surface of solar cell (Photovoltaic). Therefore, the attaching the two surfaces between the thermal collectors and the solar cells is a good way to solve the problem with respect to the excess heat on the solar cell surface. In particular, this type collector is called as a hybrid photovoltaic/Thermal (PV/T) collector.

The PV/T collector can generate thermal and electricity energy simultaneously. Another advantage of using this type of collector is that the electrical efficiency remains stable even increases due to absorbing the excess heat by the working fluid on the surface temperature of the PV. Besides producing electricity, the PV/T collectors also produce hot working fluid so that they can be used for various purposes such as the heating process in industry and the health sector, household needs and other needs. Investigations have been carried out and reported over the last 25 years by several researchers (Abdelrazik et al. 2018, Amrizal et al. 2010, 2012, 2013, 2017) those are related to the evaluation of thermal and electrical output. They present experimental work, analytical, numerical models, simulation and the development of performance testing processes.

Concerning to the traditional working fluids of the PV/T solar collector, in fact, water or oil based fluids used in the PV/T collector have low thermophysical properties in term of thermal conductivity and specific heat capacity. Nanofluid shall be alternatively applied to this type collector in enhancing the performance of the collector. In this context, Das et al. (2006) introduced nanofluid that contain a small quantity of nanoparticles which have diameter usually less than 100 nm. It is mixed with conventional fluids providing more heat transfer ability. The solid particle dispersed in base fluid such as thermal oils, refrigerant, ethylene glycol or water (Yazdanifard et al. 2017, Bellos et al. 2018, Khanafer and Vafai 2018. This could be important because by implementing nanofluid, the heat transfer of the fluid can be increased significantly (Mahbubul, 2019).

Significant findings have obtained by several researchers for metal oxide nanoparticles added into different base fluids which are called it as nanofluids. Sardarabadi and Passandideh (2016) presented an experimental study and a numerical of a PV/T collector with several types of nanoparticles. Al_2O_3 , TiO_2 and ZnO are used in this study were as nanofluids. The authors concluded that ZnO nanofluid and TiO_2 nanofluid have the higher electrical efficiency than Al_2O_3 nanofluid.

Hashim et al. (2015) conducted an experimental work of the effect of using Al_2O_3 nanofluid as a cooling medium for the PVT collector system based on forced convection. Several different concentrations of Al_2O_3 nanofluid were tested (0.1, 0.2, 0.3, 0.4 and 0.5%). The results show that the temperature decreased significantly to 42.2°C and the electrical efficiency increase 12.1% at a concentration of 0.3%.

The experimental and numerical studies of a PVT system cooled by nanofluids was introduced by Rejeb et al. (2016). Nanoparticles (Al_2O_3 and Cu) are tested by the authors at three different concentrations (0.1, 0.2, and 0.4 wt %) with fluids (ethylene glycol and water) on the performance of the system. The results show that the thermal and electrical efficiencies of water as a base fluid is more effective than ethylene glycol.

Concerning several literatures, they studied the size, arrangement, location, and type of fluid used for cooling in PV/T collector. However, studies by using nanofluid as a coolant under the tropical climate is still limited in Indonesia, for that it is necessary to investigate the behavior of the PV/T collector in the present study since it enhances heat transfer process substantially.

2. Experimental methods

The collector utilized in this work was performed by attaching the solar thermal collector under the surface of PV cell as presented in Figure 1. This type collector was tested in Bandar Lampung, at the Department of Mechanical Engineering, Universitas Lampung – Indonesia. Bandar Lampung is the capital of the Lampung Province, Indonesia and the geographical coordinates are 5.25°S and 105.17°E . The Bandar Lampung zone has a typical tropical climate which is characterized as dry and rainy seasons. The effect of nanofluid concentration on the thermal performance was investigated according to EN 12975-2 (2006) standard. The volume fraction of the nanoparticles used in the present study were 0.3%, 0.6% and 0.9%, respectively. The performance of the system was compared to the water as a traditional working fluid performed under low latitude tropical region (Bandar Lampung climate) and the average ambient temperature of 27°C .

2.1. Experimental procedures

The collector must be tested under incident radiation more than 500 W/m^2 . Data collection were recorded for inlet and outlet fluid temperatures, ambient temperature and incident radiation, respectively. Then, the temperatures and radiation were measured using K-type Thermocouples and Solar Power Meter SPM 1116SD, respectively. According to EN 12975-2 standard, the mass flow rate of the working fluid was regulated by using a valve at a constant flow rate of $0.02\text{ kg/m}^2\text{s}$. Electrical heaters were used in order to vary inlet fluid temperatures during the tests.



Fig. 1: PV/T collector

2.2. Characterization of PV/T solar collector

In generally, equations of solar thermal collector performance are given as follows.

$$q_u = F'[(\tau\alpha)G - U_L(T_m - T_a)] \quad (1)$$

$$q_u = \dot{m}c_p(T_m - T_a)/A_c \quad (2)$$

The above equations are based on the energy balance in which equation (1) is known as The Hottel-Whillier-Bliss equation (Dufie et al. 2006) where $F'(\tau\alpha)$ is the zero loss efficiency, $F'U_L$ is the overall heat loss coefficient, respectively. From equation (2) \dot{m} is the mass flow rate of fluid, c_p is the heat capacity of fluid, $(T_m - T_a)$ is the temperature difference and A_c is the area of absorber plate. Furthermore, electrical efficiency of the PV/T collector is obtained from equation 3

$$\eta = \frac{P}{GA} \quad (3)$$

where P is electrical power given by PV/T collector during the tests ($P = VI$), G is solar radiation and A is area of the collector.

3. Result and Discussion

Several performance tests were conducted in relation to the different nanofluid volume fraction and the inlet fluid temperature, respectively. Table 1 presents the results of the surface temperature and electrical power. Furthermore, the electrical efficiency is shown in Figure 2. Four types of working fluid were implemented such as water only and three different concentrations of TiO₂ nanofluid.

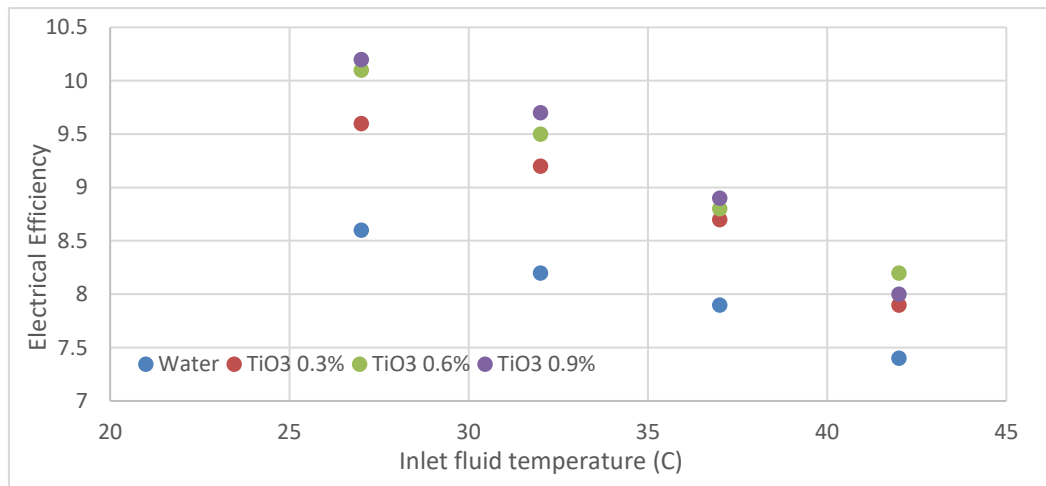


Fig. 2: Electrical efficiency versus inlet fluid temperature

Concerning the thermal performance in the current work, it describes the effect of water and TiO₂ nanofluid as a base fluid with different nanofluid volume fraction. The values of zero thermal efficiency parameter are 0.58, 0.71, 0.68, 0.66, 0.65 for water, TiO₂ nanofluid 0.3%, TiO₂ nanofluid 0.6%, TiO₂ nanofluid 0.9%, respectively. In comparison with the water only, there is an increase of zero thermal efficiency ($F'(\tau\alpha)_e$) up to 18% which is obtained by using nanofluid at the volume fraction of 0.9%. The significant different between the two results with and without nanofluid because of the heat transfer can be increased as well as the thermal performance of the whole system. Consequently, the nanofluid absorb more heat than that of the conventional fluid water.

In term of the electrical performance, as shown in Figure 2 the surface temperature of PV collector with 0.9% of TiO₂ nanofluid has lowest value in comparison with the others. Consequently, this might give the highest value of electrical efficiency about 10.2 %. Therefore, the nanofluid implemented on the PV/T collector has better thermal performance than the water only as a base fluid. In case of increasing the concentration in the current work, it does not significantly affect the electrical efficiency of the PV/T solar collector with respect to each others. The values for electrical power from different volume fraction of the TiO₂ nanofluid are almost constant and a small different is given in the values for electrical efficiency.

Table 1: average temperature of the PV surface and power based on the inlet fluid temperature different concentration of TiO₂ nanofluid

Inlet Fluid Temperature (°C)	Water only		TiO ₂ nanofluid (0,3%)		TiO ₂ nanofluid (0,6%)		TiO ₂ nanofluid (0,9%)	
	T _s (°C)	Power (W)	T _s (°C)	Power (W)	T _s (°C)	Power (W)	T _s (°C)	Power (W)
27	59,36	31,22	57,80	35,79	55,60	36,33	53,5	36,75
32	62,82	29,60	60,80	33,69	58,70	34,19	56,6	34,90
37	66,30	28,38	63,62	31,50	62,20	31,86	60,2	32,51
42	70,35	27,20	68,81	28,83	66,60	29,38	64,15	29,91

*T_s (°C) : average temperature of the PV surface

4. Conclusion

Effect of nanofluid concentration on the behavior of PV/T flat-plate solar collectors has been characterized. The parameters that characterize the PV/T collector are zero thermal efficiency, the overall heat loss coefficient, average temperature of the PV surface and electrical efficiency. The performance of the system was compared to the water as a base fluid implemented in low latitude tropical region (Bandar Lampung climate). The experimental result shows that an increase of zero thermal efficiency up to 18% which is obtained by using nanofluid at the volume fraction of 0,9%. Furthermore, the surface temperature of PV collector with 0.9% of TiO₂ nanofluid has lowest value in comparison with the others. The TiO₂ nanofluid absorbs more heat than that of the conventional fluid water. However, the values for electrical power from different volume fraction of the TiO₂ nanofluid are almost constant.

5. Nomenclature

η	collector efficiency factor	m ²
G	solar radiation	W/m ²
T	temperature	°C
\dot{m}	mass flow rate	kg/s
q	energy gain	W
k	thermal conductivity	W/mC
c	heat specific of fluid	J/kgC
U	overall heat loss coefficient	W/m ² C
A	area	m ²
V	Voltage	V
I	current	Ampere
Greek letters		
α	absorbitivity	-
τ	transmissivity	-
Subscripts		
a	ambient	
m	mean	
s	surface	
u	usefull	
p	pressure	

6. Acknowledgements

The authors are grateful to have financial support from Research Grant (PPs-BLU) 2019, Universitas Lampung.

7. References

- A. S. Abdelrazik, F. A. Al-Sulaiman, R. Saidur, and R. BenMansour, 2018. "A review on recent development for the design and packaging of hybrid photovoltaic/thermal (PV/T) solar systems," *Renewable and Sustainable Energy Reviews*, vol. 95, pp. 110–129.
- Amrizal Nalis, Daniel Chemisana, J. I. Rosell, 2010. The Use of Filtering for the Dynamic Characterization of PV/T Flat-Plate Collectors. *International Conference on Solar Heating, Cooling and Buildings EuroSun*, Graz University, Austria.
- Amrizal, D. Chemisana, J.I. Rosell, J.Barrau, 2012. A dynamic model based on the piston flow concept for the thermal characterization of solar collectors. *Applied Energy*, 94, 244-250.
- Amrizal, D. Chemisana, and J. I. Rosell, 2013. Hybrid Photovoltaic-Thermal Solar Collector Dynamic Modelling. *Applied Energy*, 101, 797-807.
- Amrizal, Amrul, Ahmad Yonanda, Zulfa, 2017. Comparison Study of Solar Flat Plate Collector With Two Different Absorber Materials, *The 1st Faculty of Industrial Technology International Congress*, Itenas Bandung, ISBN 978-602-53531-8-5, 17-22 .
- A. R. A. Hashim, A. Hussien, and A. H. Noman, 2015. "Indoor investigation for improving the hybrid photovoltaic/thermal system performance using nanofluid (AL₂O₃-water)," *Engineering and Technology Journal*, vol. 33, no. 4, pp. 889–901,
- E. Bellos, Z. Said, and C. Tzivanidis, 2018. "The use of nanofluids in solar concentrating technologies: a comprehensive review," *Journal of Cleaner Production*, vol. 196, pp. 84–99,
- European Standard EN 12975-2:2006. CEN (European Committee for Standardisation).
- F. Yazdanifard, M. Ameri, and E. Ebrahimi-Bajestan, 2017. "Performance of nanofluid-based photovoltaic/thermal systems: a review," *Renewable and Sustainable Energy Reviews*, vol. 76, pp. 323–352,
- I. M. Mahbubul, "Preparation of nanofluid, 2019." in *Preparation, Characterization, Properties and Application of Nanofluid*, W. Andrew, Ed., p. 374, Elsevier Inc.,
- John A. Dufie, William A. Beckman. 2006. *Solar Engineering of Thermal Processes*, John Wiley & Sons, Inc.
- K. Khanafer and K. Vafai, 2018. "A review on the applications of nanofluids in solar energy field," *Renewable Energy*, vol. 123, pp. 398–406,
- M. Sardarabadi and M. Passandideh-Fard, 2016. "Experimental and numerical study of metal-oxides/water nanofluids as coolant in photovoltaic thermal systems (PVT)," *Solar Energy Materials & Solar Cells*, vol. 157, pp. 533–542,
- O. Rejeb, M. Sardarabadi, C. Ménézo, M. Passandideh-Fard, M. H. Dhaou, and A. Jemni, 2016. "Numerical and model validation of uncovered nanofluid sheet and tube type photovoltaic thermal solar system," *Energy Conversion and Management*, vol. 110, pp. 367–377
- S.K.Das, S.U.S.Choi, and H.E.Patel, 2006 "Heat transfer in nanofluids—a review," *Heat Transfer Engineering*, vol. 27, no. 10, pp. 3–19.

● 17% Overall Similarity

Top sources found in the following databases:

- 11% Internet database
- 15% Publications database
- Crossref database
- Crossref Posted Content database

TOP SOURCES

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

1	Amrizal, Y P Hidayat, M Irsyad. "Performance comparison of single and...	4%
	Crossref	
2	hindawi.com	3%
	Internet	
3	Amrizal, N.. "A dynamic model based on the piston flow concept for th...	1%
	Crossref	
4	coek.info	1%
	Internet	
5	researchgate.net	<1%
	Internet	
6	Wei Pang, Yanan Cui, Qian Zhang, Hongwen Yu, Linrui Zhang, Hui Yan. ...	<1%
	Crossref	
7	dokumen.pub	<1%
	Internet	
8	Ali H.A. Al-Waeli, K. Sopian, Miqdam T. Chaichan, Hussein A. Kazem, H...	<1%
	Crossref	
9	prosiding.bkstm.org	<1%
	Internet	

10	futurecitiesandenvironment.com	Internet	<1%
11	inase.org	Internet	<1%
12	ore.exeter.ac.uk	Internet	<1%
13	Aditya Chauhan, V.V. Tyagi, Sanjeev Anand. "Futuristic approach for th...	Crossref	<1%
14	S. Rahmanian, A. Hamzavi. "Effects of pump power on performance an...	Crossref	<1%
15	Sumon Chowdhury, Md. Razon Chowdhury. "Advancements of Air, Wat...	Crossref	<1%
16	arc.aiaa.org	Internet	<1%
17	researchspace.ukzn.ac.za	Internet	<1%

● Excluded from Similarity Report

- Submitted Works database
- Quoted material
- Small Matches (Less then 8 words)
- Manually excluded text blocks
- Bibliographic material
- Cited material
- Manually excluded sources

EXCLUDED SOURCES

foitic.itenas.ac.id	79%
Internet	

eproceeding.itenas.ac.id	79%
Internet	

repository.lppm.unila.ac.id	37%
Internet	

EXCLUDED TEXT BLOCKS

Proceedings of the 2nd Faculty of Industrial Technology International CongressInt...
journal.unusida.ac.id

Engineering, Universitas Lampung

S B Ginting, Y Yulia, H Wardono, Darmansyah, M Hanif, D A Iryani. "Synthesis and Characterization of Zeolite...

mass flow rate kg/s

Chung-Feng Jeffrey Kuo, Yu-Wei Lee, Mega Lazuardi Umar, Pei-Chung Yang. "Dynamic modeling, practical v...

Effect of nanofluid concentration on the performance of PV/Tcollector under the tr...

www.researchgate.net
